



Precision Rolling Bearings

CAT.No.2260-11/E



NTN Precision Rolling Bearings		Technical Data	1. Classification of Precision Rolling Bearings for Machine Tools 2 2. Bearing Selection and Shaft & Housing Design 6 3. Load Rating and Life 21 4. Allowable Speed 29 5. Bearing Arrangements and Structures of Bearings for Main Spindles 30 6. Handling of Bearings 37 7. Lubrication of Bearings 62 8. Precision Bearing Technologies 74	Technical Data
		Main Spindle Bearings	9. Angular Contact Ball Bearings for Radial Loads 85 10. Cylindrical Roller Bearing 251 11. Angular Contact Ball Bearings for Axial Loads 287 12. Tapered Roller Bearings 315	Main Spindle Bearings
		Ball Screw Support Bearings	13. Ball Screw Support Bearings 323	Ball Screw Support Bearings
		NTN Products	14. Cam Followers for Pallet Changer 362	NTN Products
		Appendix	15. Appendix Table 366	Appendix

Precision Rolling Bearings

Page

TECHNICAL DATA CONTENTS

1. Classification of Precision Rolling Bearings for Machine Tools	2-5
1.1 Main spindle bearings	2
1.2 Ball screw support bearings	5
2. Bearing Selection and Shaft & Housing Design	6-20
2.1 Bearing selection	6
2.2 Bearing accuracy	8
2.3 Bearings and rigidity	13
2.4 Designing shaft and housing	19
3. Load Rating and Life	21-28
3.1 Bearing life	21
3.2 Static load rating and allowable axial load	27
4. Allowable Speed	29
5. Bearing Arrangements and Structures of Bearings for Main Spindles	30-36
5.1 Bearing arrangement for main spindles	30
5.2 Bearing selection based on bearing arrangement for main spindle	32
5.3 Adjustable preload bearing unit	34
5.4 Bearing jacket cooling system	36
6. Handling of Bearings	37-61
6.1 Cleaning and filling with grease	37
6.2 Mounting	40
6.3 Clamp of inner ring	43
6.4 Elastic deformation of spacer by clamp force	45
6.5 Front cover drive-up	47
6.6 Checking axial rigidity	48
6.7 Clearance adjustment for cylindrical roller bearing	48
6.8 Tapered bore cylindrical roller bearing and main spindle taper angle	56
6.9 Handling precautions	58
6.10 Bearing storage	58
6.11 Bearing installation	60
6.12 Running-in operation for main spindle bearing	61
7. Lubrication of Bearings	62-73
7.1 Grease lubrication	64
7.2 Air-oil lubrication	66
7.3 Jet lubrication	73
8. Precision Bearing Technologies	74-82
8.1 ULTAGE™ series precision bearings for machine tool main spindles	74
8.2 Material and surface modification	75
8.3 Environmentally conscious technology	77

According to the basic policy of **NTN** corporation, we do not export products or techniques that are regulated by foreign exchange rates or that violate foreign trade laws. For classification of products specified in this catalog, please contact our branch business offices.

In addition, the accuracy of this catalog has been confirmed; however, please note that we do not take any responsibility or liability for any erroneous descriptions or omissions.

● Classification of Precision Rolling Bearings for Machine Tools

NTN

1. Classification of Precision Rolling Bearings for Machine Tools





1.1 Main spindle bearings

Table 1 Types of precision rolling bearings for machine tools



Bearing type	Cross section	Bearing type	Bearing bore mm	Contact angle	Remarks	Page
 Angular contact ball bearing	 Standard	78C	$\phi 25-\phi 170$	15°	● A bearing type code containing a suffix U means an ULTAGE™ series bearing. Optimized interior structure and resin cage help positively inhibit temperature rise (applicable to 79 and 70 types with bore diameter of 10 to 130 mm). ● Bearings with prefix 5S have ceramic balls.	126 153
		79 (U), 5S-79 (U)	$\phi 10-\phi 170$	15°, 25°, 30°		
		70 (U), 5S-70 (U)	$\phi 10-\phi 200$	15°, 25°, 30°		
		72C	$\phi 10-\phi 130$	15°		
	 High speed	2LA-HSE9U 5S-2LA-HSE9U	$\phi 50-\phi 170$	15°, 20°, 25°	● ULTAGE™ series ● Use of special material and introduction of surface modification contribute to much improved wear resistance and anti-seizure property. ● Optimized specifications for the interior structure lead to higher speed, rigidity and reliability. ● Bearings with prefix 5S have ceramic balls.	154 177
		2LA-HSE0 5S-2LA-HSE0				
	 Ultra high speed	5S-2LA-HSF0	$\phi 50-\phi 100$	25°	● ULTAGE™ series ● Maintaining the advantages of HSE type, this type has small diameter ceramic balls to achieve higher speed and limited heat buildup. ● Bearings with prefix 5S have ceramic balls.	178 179
	 Eco-friendly	5S-2LA-HSL9U	$\phi 50-\phi 170$	20°, 25°	● ULTAGE™ series ● These bearings are identical to the HSE and HSF types except in that they are air-oil lubrication designs that have an eco-friendly nozzle. ● Featuring lower noise, reduced air and oil consumption, they positively improve operating environments and reduce energy consumption. ● Bearings with prefix 5S have ceramic balls.	180 189
		5S-2LA-HSL0				
		5S-2LA-HSFL0	$\phi 50-\phi 100$	25°		
	 HSE with lubrication hole	5S-2LA-HSEW9U	$\phi 50-\phi 100$	20°, 25°	● ULTAGE™ series ● High speed angular contact ball bearings with lubrication hole on outer ring, designed especially for air-oil lubrication based on HSE type. These bearings have an effect on compact design and high rigidity of spindle. Air flow rate and oil consumption can be reduced. ● Bearings with prefix 5S have ceramic balls.	190 197
		5S-2LA-HSEW0				
	 Standard Non-contact sealed type	79 LLB 5S-79 LLB	$\phi 10-\phi 50$	15°, 25°	● ULTAGE™ series ● Featuring a two-side non-contact seal design and a special grease, these bearings are a dedicated grease lubricated type that has achieved limited heat buildup through optimization of the interior structure. ● Bearings with prefix 5S have ceramic balls.	198 213
		70 LLB 5S-70 LLB				
	 High speed Non-contact sealed type	2LA-BNS9 LLB 5S-2LA-BNS9 LLB	$\phi 45-\phi 100$	15°, 20°, 25°	● ULTAGE™ series ● Maintaining the advantages of HSE type, this dedicated grease lubricated type has an improved interior design (grease reservoir, both -side non-contact seal and special grease) to extend grease life. ● Bearings with prefix 5S have ceramic balls.	214 237
		2LA-BNS0 LLB 5S-2LA-BNS0 LLB				
	 Adjustable preload bearing unit	BNT9 5S-BNT9	$\phi 10-\phi 65$	15°	● Angular contact ball bearings for grinding machines/motors. ● All variants are flush ground. ● Bearings with prefix 5S have ceramic balls.	238 249
		BNT0 5S-BNT0	$\phi 10-\phi 70$			
		BNT2 5S-BNT2	$\phi 10-\phi 80$			

● Classification of Precision Rolling Bearings for Machine Tools

NTN



Bearing type	Cross section	Bearing type	Bearing bore mm	Contact angle	Remarks	Page
 Double-row cylindrical roller bearing	 ULTAGE	NN49 (K)	$\phi 100-\phi 320$	—	● The bearing clearance can be either interchangeable radial internal clearance or non-interchangeable radial internal clearance. ● A variant (K) is available with a tapered bore to accommodate a tapered shaft. ● A bearing type code containing a suffix T6 means an ULTAGE™ series bearing. Optimized interior structure and resin cage help high speed and positively inhibit temperature rise (applicable to NN30 types with bore diameter of 65 to 130 mm).	270 275
		NN30 (K) NN30HS (K)	$\phi 25-\phi 60$ $\phi 150-\phi 460$			
		NN30HST6 (K) NN30HSRT6 (K)	$\phi 65-\phi 140$			
	 ULTAGE	NNU49 (K)	$\phi 100-\phi 500$	—		
 Single-row cylindrical roller bearing	 High speed	N10HS (K)	$\phi 30-\phi 160$	—	● The boundary dimensions of the N10HS(K) high speed single-row cylindrical roller bearing are the same as those of the N10(K). Only the bearing clearance is non-interchangeable. ● A ceramic-roller-type (5S-N10) is available on request.	276 279
	 Ultra high speed	N10HSRT6 (K)	$\phi 55-\phi 100$	—	● ULTAGE™ series ● Optimized internal design allows higher speed and results in lower temperature rise. ● The cage is made of a special resin to cope with a high speed operation. ● The allowable maximum speed is higher than that of the conventional high speed cylindrical roller bearing N10HS(K).	280 281
	 Eco-friendly	N10HSLT6 (K)	$\phi 55-\phi 100$	—	● ULTAGE™ series ● This is a dedicated air-oil lubricated type identical to the N10HSRT6(K) type except in that it incorporates an eco-friendly nozzle. ● Still maintaining the high speed performance of the N10HSRT6(K) type, this type boasts lower noise, reduced air and oil consumption, and positively improves operating environments and reduces energy consumption.	282 283
 Plug gauge Ring gauge Taper gauge	Plug gauge TA		$\phi 30-\phi 160$	—	● Taper gauge for N10HS(K) single-row cylindrical roller bearing and NN30(K) double-row cylindrical roller bearing.	284
	Ring gauge TB		$\phi 30-\phi 160$			
 Mounted internal clearance adjustment gauge	SB		$\phi 35-\phi 160$	—	● Mounted internal clearance adjustment gauge for N10HS(K), N10HSR(K) single-row cylindrical roller bearing and NN30(K), NN30HS(K) double-row cylindrical roller bearing.	285
 Adjustable preload bearing unit	Adjustable preload bearing unit		—	—	● Fixed position adjustable preload bearing unit. ● Incorporation of an adjustable preload sleeve and a duplex angular contact ball bearing allows the user to adjust the preload of an angular contact ball bearing in a wider range from a light preload to a heavy preload. ● Fixed position preload leads to a greater rigidity.	—

● Classification of Precision Rolling Bearings for Machine Tools NTN

Bearing type	Cross section	Bearing type	Bearing bore mm	Contact angle	Remarks	Page
 Double-direction angular contact thrust ball bearing		5629 (M)	Small-size $\phi 100\text{--}\phi 220$ Large-size (M) $\phi 104\text{--}\phi 227$	60°	The small bearing is used on a cylinder bore or smaller-diameter side of a tapered bore of the NNU49, NN49 or NN30 double-row cylindrical roller bearing; the large bearing (suffix M) is used on the large hole side of a tapered bore.	298 301
		5620 (M)	Small-size $\phi 25\text{--}\phi 200$ Large-size (M) $\phi 27\text{--}\phi 207$			
 Angular contact ball bearing for axial load		HTA9U	$\phi 100\text{--}\phi 320$	30°, 40°	●ULTAGE™ series ●HTA9UDB type bearings are fully compatible with 5629 type bearings.	302
		HTA0U SS-HTA0U	$\phi 25\text{--}\phi 320$ $\phi 25\text{--}\phi 130$			313
 Tapered roller bearings		329	$\phi 50\text{--}\phi 190$	Nominal contact angle of 10° or greater, 17° or smaller	●Thin-wall type, ISO-compatible metric series.	318
		320	$\phi 20\text{--}\phi 170$			321

● Classification of Precision Rolling Bearings for Machine Tools NTN

1.2 Ball screw support bearings

Bearing type	Cross section	Bearing type	Bearing bore mm	Contact angle	Remarks	Page
 Angular contact thrust ball bearing for ball screw support		BST 2A-BST Open type	$\phi 17\text{--}\phi 55$	60°	●ULTAGE™ series ●Surface modification treatment on the bearing ring raceways has led to a longer bearing life and much improved fretting resistance. ●Owing to prelubrication with a special grease, the sealed type boasts a longer bearing life and simpler maintenance work. ●All variants are flush ground and are provided with a standard preload.	346 351
		BST LXL/L588 2A-BST LXL/L588 Light-contact sealed type				
 Double-row thrust angular contact ball bearing unit for ball screw support		BSTU LLX/L588 Light-contact sealed type	$\phi 20\text{--}\phi 100$	60°	●ULTAGE™ series. ●Greater high-load capacity with optimizations made to the internal bearing design. ●Use of newly developed light-contact seal to achieve both low torque and high dust resistance. ●Long operating life, and use of special grease with high fretting resistance. ●Outer ring mounting hole, and sealed grease lubrication groove for easier handling.	352 355
 Angular contact ball bearing for ball screw support		HT	$\phi 6\text{--}\phi 40$	30°	●The allowable axial load of this bearing type is greater owing to the improved interior design.	356 357
 Needle roller bearings with double-direction thrust needle roller bearing		AXN	$\phi 20\text{--}\phi 50$	—	●A clearance remains between the inner ring of radial bearing and the inner rings of both thrust bearings, allowing the user to determine the preload by, for example, tightening a nut etc. ●The targeted preload is attained based on the starting torque. ●The bearing clearance on certain preloaded bearings is controlled in advance so that an intended preload is attained by fully clamp the inner rings on both thrust bearing with nuts, or equivalent means.	358 359
 Needle roller bearings with double-direction thrust cylindrical roller bearing		ARN	$\phi 20\text{--}\phi 70$	—		360 361

2. Bearing Selection and Shaft & Housing Design

2.1 Bearing selection


Generally, the optimal bearing must be selected to suit the nature of the machine, the area within the machine, the spindle specification, bearing type, lubrication system and drive system of the intended machine through considerations of the design life,

precision, rigidity and critical speed, etc. of the bearing. **Table 2.1** summarizes a typical bearing selection procedure, and **Table 2.2** gives an example flowchart according to which considerations are made to select an optimal main spindle bearing for a machine tool.

Table 2.1 Bearing selection procedure

Step	Items being considered	Items being confirmed
Confirm operating conditions of bearing and consider bearing type.	- Function and construction of components to house bearings - Bearing mounting location - Dimensional limitations - Magnitude and direction of bearing load - Magnitude of vibration and shock load - Shaft speed - Bearing arrangement (fixed side, floating side) - Noise and torque of the bearing - Bearing operating temperature range - Bearing rigidity - Installation/disassembly requirements - Maintenance and inspection - Cost-effectiveness - Allowable misalignment of inner/outer rings	Determine bearing type and arrangement.
Select bearing dimensions.	- Design life of components to house bearings - Dynamic/static equivalent load conditions - Safety factor S_0 - Allowable speed - Allowable axial load	Determine bearing dimensions.
Select bearing tolerances.	- Shaft runout tolerances - Torque fluctuation - High speed operation	Decide bearing grade.
Select bearing internal clearance.	- Material and shape of shaft and housing - Fits - Temperature difference between inner and outer rings - Allowable misalignment of inner/outer rings - Magnitude and nature of load - Amount of preload	Decide bearing internal clearance.
Select cage.	- Rotational speed - Noise level - Vibration and shock load - Lubrication	Determination of cage type
Select lubrication method.	- Operating temperature - Rotational speed - Lubrication method - Sealing method - Maintenance and inspection	Decide lubrication method, lubricant, and sealing method.
Consider special specifications.	- Operating conditions (special environments: high or low temperature, chemical) - Requirement for high reliability	Decide special bearing specifications.
Select installation and disassembly procedures.	- Mounting dimensions - Installation and disassembly procedures	Decide installation and disassembly procedures.

Table 2.2 Bearing selection flow chart for machine tool spindles

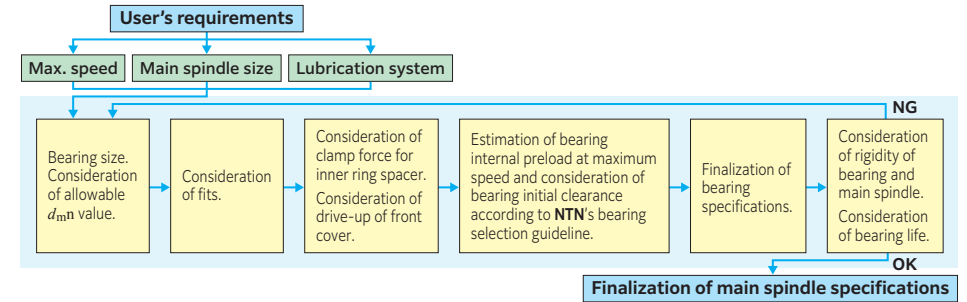

The articles necessary for basic considerations in selecting an optimal main spindle bearing for machine tool are summarized in **Table 2.3**.

Table 2.3 Selection procedure for bearings for main spindles of machine tools

(1) Type of Machine	NC Lathe, machining center, grinding machine, etc.
(2) Main spindle orientation	Vertical, horizontal, variable-direction, inclined, etc.
(3) Diameter and size of main spindle	#30, #40, #50, etc.
(4) Shape and mounting-related dimensions of main spindle	Fig. 2.1 Main spindle shape and mounting-related dimensions (example)
(5) Intended bearing type, bearing size, and preloading method	Front (angular contact type, cylindrical roller type) or rear (angular contact type, cylindrical roller type) preloading system (fixed-position preloading, fixed-pressure preloading)
(6) Slide system free side	Cylindrical roller bearing, ball bushing (availability of cooling)
(7) Lubrication method	Grease, air-oil, oil mist (MicronLub)
(8) Drive system	Built-in motor, belt drive, coupling
(9) Presence/absence of jacket cooling arrangement on bearing area	w/, w/o
(10) Jacket cooling conditions	Synchronization with room temperature, machine-to-machine synchronization, oil feed rate (L/min)
(11) Operating speed range	Max. speed (min ⁻¹) Normal speed range (min ⁻¹) Operating speed range (min ⁻¹)
(12) Load conditions (machining conditions)	Load center Applied load Radial load F_r (N) Axial load F_a (N) Speed Machining frequency Intended bearing life

2.2 Bearing accuracy

■ Bearing accuracy

Accuracies of rolling bearings, that is, dimensional accuracy and running accuracy of rolling bearings are defined by applicable ISO standards and JIS B 1514 standard (Rolling bearings - Tolerances) (see **Table 2.4** and **Table 2.5**). The dimensional accuracy governs the tolerances that must be satisfied when mounting a bearing to a shaft or housing, while the running accuracy defines a permissible

run-out occurring when rotating a bearing by one revolution. Methods for measuring the accuracy of rolling bearings (optional methods) are described in JIS B 1515 (Measuring methods for rolling bearings). **Table 2.6** summarizes some typical methods for measuring running accuracy of rolling bearings.

Table 2.4 Bearing types and applicable tolerance

Bearing type		Applicable standard	Tolerance class				
Angular contact ball bearings		JIS B 1514-1 (ISO 492)	Class 0	Class 6	Class 5	Class 4	Class 2
Cylindrical roller bearings			Class 0	Class 6	Class 5	Class 4	Class 2
Needle roller bearings			Class 0	Class 6	Class 5	Class 4	—
Tapered roller bearings	Metric	JIS B 1514-1	Class 0,6X	(Class 6) ¹⁾	Class 5	Class 4	—
	Inch	ANSI/ABMA Std.19	Class 4	Class 2	Class 3	Class 0	Class 00
	J series	ANSI/ABMA Std.19.1	Class K	Class N	Class C	Class B	Class A
Double-direction angular contact thrust ball bearings		NTN standard	—	—	Class 5	Class 4	—

1) The class is the NTN standard class.

Table 2.5 Comparison of tolerance classifications of national standards

Standard	Applicable standard	Tolerance Class					Bearing Types
Japanese industrial standard (JIS)	JIS B 1514	Class 0,6X	Class 6	Class 5	Class 4	Class 2	All type
International Organization for Standardization (ISO)	ISO 492	Normal class Class 6X	Class 6	Class 5	Class 4	Class 2	Radial bearings
	ISO 199	Normal class	Class 6	Class 5	Class 4	—	Thrust bearings
	ISO 578	Class 4	—	Class 3	Class 0	Class 00	Tapered roller bearings (Inch series)
	ISO 1224	—	—	Class 5A	Class 4A	—	Precision instrument bearings
Deutsches Institut für Normung (DIN)	DIN 620	P0	P6	P5	P4	P2	All type
American National Standards Institute (ANSI)	ANSI/ABMA Std.20 ¹⁾	ABEC-1 RBEC-1	ABEC-3 RBEC-3	ABEC-5 RBEC-5	ABEC-7	ABEC-9	Radial bearings (Except tapered roller bearings)
American Bearing Manufacturers Association (ABMA)	ANSI/ABMA Std.19.1	Class K	Class N	Class C	Class B	Class A	Tapered roller bearings (Metric series)
	ANSI/ABMA Std.19	Class 4	Class 2	Class 3	Class 0	Class 00	Tapered roller bearings (Inch series)

1) "ABEC" is applied for ball bearings and "RBEC" for roller bearings.







Notes 1: JIS B 1514, ISO 492 and 199, and DIN 620 have the same specification level.

2: The tolerance and allowance of JIS B 1514 are slightly different from those of ABMA standards.

To attain a higher level of running accuracy required of a main spindle of machine tool, a high-precision bearing that satisfies the user's main spindle specifications must be chosen. Usually, a high-precision bearing per JIS accuracy Class 5, 4 or 2 is selected according to an intended application. In particular, the radial run-out, axial run-out and non-repetitive run-out of a main spindle bearing greatly affect the running accuracy of the main spindle and therefore have to be strictly controlled. With the recent super high-precision machine tools, the control of N.R.R.O. (Non-Repetitive Run-Out) has increasing

importance, and the main spindle on a turning machine or machining center incorporates an N.R.R.O. accuracy controlled bearing. For further information about N.R.R.O., refer to the following section. Note that to attain a higher accuracy with a main spindle, careful considerations need to be exercised for the accuracies (circularity, cylindricity, coaxiality) of machine components other than a bearing (shaft, housing) as well as machining method and finish accuracy of the shaft and housing. For the information about the accuracies of shaft and housing, refer to a section given later.

Table 2.6 Measuring methods for running accuracies

Accuracy characteristics	Measurement methods	
Radial runout of inner ring of assembled bearing (K_{ia})		Radial runout of the inner ring is the difference between the maximum and minimum reading of the measuring device when the inner ring is turned one revolution.
Radial runout of outer ring of assembled bearing (K_{ea})		Radial runout of the outer ring is the difference between the maximum and minimum reading of the measuring device when the outer ring is turned one revolution.
Axial runout of inner ring of assembled bearing (S_{ia})		Axial runout of the inner ring is the difference between the maximum and minimum reading of the measuring device when the inner ring is turned one revolution.
Axial runout of outer ring of assembled bearing (S_{ea})		Axial runout of the outer ring is the difference between the maximum and minimum reading of the measuring device when the outer ring is turned one revolution.
Perpendicularity of inner ring face with respect to the bore (S_d)		The squareness of the inner ring side surface is the difference between the maximum and minimum readings of the measuring device when the inner ring is turned one revolution together with the tapered mandrel.
Perpendicularity of outer ring outside surface with respect to the face (S_D)		The squareness of the outer ring outside diameter surface is the difference between the maximum and minimum readings of the measuring device when the outside ring is turned one revolution along the reinforcing plate.

Bearing Selection and Shaft & Housing Design

NTN

N.R.R.O. (Non-Repetitive Run-Out) of bearing

Accuracies of rolling bearings are defined by applicable ISO standards and a JIS (Japanese Industrial Standards) standard, wherein the accuracies are discussed under the descriptions of radial run-out (K_{1a}), axial run-out (S_{1a}), etc. According to the methods for measuring running accuracies in **Table 2.6**, run-out is read by turning a bearing by only one revolution (each reading is synchronized with the revolution of the bearing being analyzed).

In fact, however, a rolling bearing for machine tool is used in a continuous revolving motion that involves more than one revolution (see **Fig. 2.2**). As a result, the actual run-out accuracy with a rolling bearing includes elements that are not synchronous with the revolution of the bearing (for example, a difference in diameter among rolling elements involved, as well as roundness on the raceway surfaces of inner ring and outer ring), causing

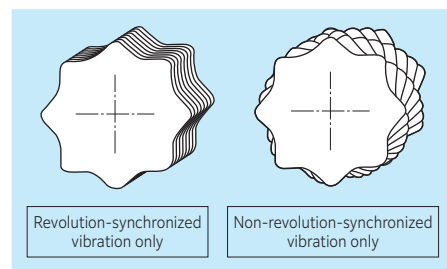


Fig. 2.2

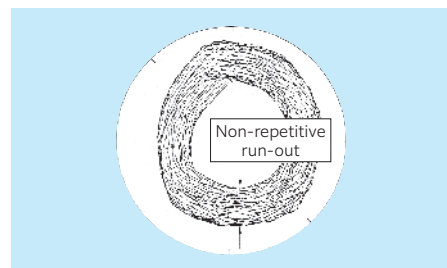


Fig. 2.3 Lissajous figure

the trajectory of plotting with running accuracies to vary with each revolution.

The run-out of an element not in synchronization with the revolutions of bearing is known as N.R.R.O. (Non-Repetitive Run-Out) and is equivalent to the amplitude in the Lissajous figure illustrated in **Fig. 2.3**.

The effect of N.R.R.O. on a rolling bearing onto the accuracies is illustrated in **Fig. 2.4** by taking a main spindle of turning machine as an example.

This diagram illustrates a machining process where the outside surface of a work piece mounted to the main spindle is shaved by a turning operation. If the outside surface is cut with a new trajectory with every revolution, the outside shape of work piece will be distorted. Furthermore, if the accuracies of shaft and housing are not high enough or bearings are assembled onto the shaft and/or housing improperly, the bearing ring can be deformed, possibly leading to a run-out that is not in synchronization with the revolutions of bearing.

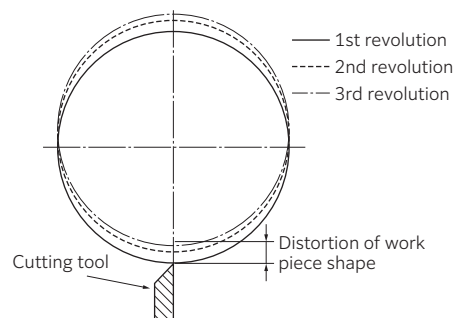


Fig. 2.4 Model of cutting operation

Bearing Selection and Shaft & Housing Design

NTN

Accuracies of shaft and housing

Depending on the fit of a bearing to a shaft and a housing, the bearing internal clearance can vary. For this reason, an adequate bearing fit has to be attained so that the bearing can perform as designed (Refer to the recommended fits section).


Also, the axial clamping force on a bearing needs to be considered. To avoid deformation of bearing raceway surface owing to axial clamp of the bearing, it is necessary to carefully determine the dimensions of components associated with a clamp force the magnitude of clamp force and the number of tightening bolts.

The clearance on a tapered bore cylindrical roller bearing is adjusted by changing the drive-up to the taper. Because of this, the critical factors associated with an appropriate fit of a bearing to a shaft and/or a housing are the dimensional accuracies of the taper, contact surface on the taper, and the squareness of the end face of the inner ring relative to the shaft centerline during the drive-up process.

Typical accuracy values for a spindle and housing are summarized in **Table 2.7** and **Table 2.8**. The values of the International Tolerance (IT) Grades are shown in **Table 2.9**.

Typical accuracy for spindle

Table 2.7 Form accuracy of spindle¹⁾

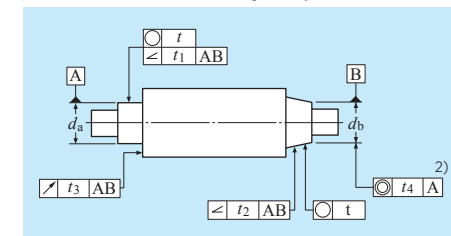

Accuracy	Symbol	Tolerance ³⁾	Fundamental permissible tolerance IT		
			P5	P4	P2
Deviation from circular form		t	$\frac{IT3}{2}$	$\frac{IT2}{2}$	$\frac{IT0^{4)}}{2}$
Angularity		t ₁	$\frac{IT3}{2}$	$\frac{IT2}{2}$	$\frac{IT0^{4)}}{2}$
		t ₂	—	$\frac{IT3}{2}$	$\frac{IT2}{2}$
Run out		t ₃	IT3	IT3	IT2
Eccentricity		t ₄	IT5	IT4	IT3

1) The form tolerance, symbol, and reference face of spindle are in accordance with ISO R1101.


2) The length of the bearing fit surface is often too small to measure concentricity. Therefore, this criterion applies only when the fit surface has a width sufficient as a reference face.

3) When determining a tolerance for permissible form accuracy, the reference dimensions used are shaft diameters d_a and d_b . For example, when using a JIS Class 5 bearing for a dia. 50 mm shaft, the tolerance of roundness is $t = IT3/2 = 4/2 = 2 \mu m$.

4) IT0 is preferred if the diameter tolerance of the bearing fit surface is IT3.

Typical accuracy for housing

Table 2.8 Form accuracy of housing ¹⁾

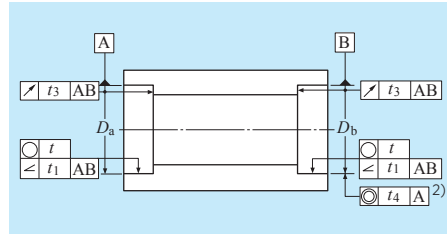

Accuracy	Symbol	Tolerance ³⁾	Fundamental permissible tolerance IT		
			P5	P4	P2
Deviation from circular form		t	$\frac{IT3}{2}$	$\frac{IT2}{2}$	$\frac{IT1}{2}$
Angularity		t_1	$\frac{IT3}{2}$	$\frac{IT2}{2}$	$\frac{IT1}{2}$
Run out		t_3	IT3	IT3	IT2
Eccentricity		t_4	IT5	IT4	IT3

1) The form tolerance, symbol and reference face of the housing are in accordance with ISO R1101.

2) The length of the bearing fit surface is often too small to measure concentricity. Therefore, this criterion applies only when the fit surface has a width sufficient as a reference face.

3) Housing bore diameters D_a and D_b are the reference dimensions used when the tolerance for permissible form accuracy are determined.

For example, when a JIS Class 5 bearing is used for a housing with a 50 mm inside bore, the tolerance of roundness is $t = IT3/2 = 5/2 = 2.5 \mu m$.

Fundamental tolerance IT

Table 2.9 Fundamental tolerance IT

Classification of nominal dimension (mm)		Fundamental tolerance IT value (μm)					
over	incl.	IT0	IT1	IT2	IT3	IT4	IT5
6	10	0.6	1	1.5	2.5	4	6
10	18	0.8	1.2	2	3	5	8
18	30	1	1.5	2.5	4	6	9
30	50	1	1.5	2.5	4	7	11
50	80	1.2	2	3	5	8	13
80	120	1.5	2.5	4	6	10	15
120	180	2	3.5	5	8	12	18
180	250	3	4.5	7	10	14	20
250	315	4	6	8	12	16	23
315	400	5	7	9	13	18	25
400	500	6	8	10	15	20	27

Note) For machine tool spindles, the shaft hardness is recommended to be at least HRC 50 and the housing is recommended to be at least HRC 30 to assist bearing replacement during repairs.

2.3 Bearings and rigidity

The rigidity of the main spindle of a machine tool is associated with both bearing rigidity and shaft rigidity. Bearing rigidity is typically governed by the elastic deformation between the rolling elements and raceway surface under load. Usually, bearings are preloaded in order to increase the rigidity.

Under same loading conditions, a roller bearing has a higher rigidity than a ball bearing of the same size. However, having sliding portions, a roller bearing is disadvantageous in supporting a high speed shaft.

Shaft rigidity is greater with a larger shaft diameter. However, the supporting bearing must have a sufficient size and its $d_m n$ value [pitch circle diameter across rolling elements d_m (mm) multiplied by speed n (min^{-1})] must be accordingly greater. Of course, a larger bearing is disadvantageous for high speed applications.

To sum up, the rigidity required of the shaft arrangement must be considered before the bearing rigidity (bearing type and preload) and shaft rigidity are determined.

Bearings rigidity

The rigidity of a bearing built into a spindle directly affects the rigidity of the spindle.

In particular, a high degree of rigidity is required of the main spindle of a machine tool to ensure adequate productivity and accurate finish of workpieces.

Bearing rigidity is governed by factors such as the following:

- (1) Types of rolling elements
- (2) Size and quantity of rolling elements
- (3) Material of rolling elements
- (4) Bearing contact angle
- (5) Preload on bearing

Type of rolling elements (roller or ball)

The surface contact pattern of the rolling element and raceway is line contact with a roller bearing, while a ball bearing is point contact. As a result, the dynamic deformation of a bearing relative to a given load is smaller with a roller bearing.

Size and number of rolling elements

The size and number of rolling elements of a bearing are determined based on the targeted performance of the bearing.

Larger rolling elements lead to a greater bearing rigidity. However, a bearing having larger rolling elements tends to be affected by gyratory sliding centrifugal force, and, as a result, its high speed performance will be degraded. Incidentally, a greater number of rolling elements helps increase bearing rigidity, but at the same time creates an increased number of heat generation sources, possibly leading to greater temperature rise.

For this reason, smaller size of rolling elements are used for high speed applications.

To achieve both "high speed" and "high rigidity", each type of the NTN angular contact ball bearing for a machine tool is manufactured according to optimized specifications for interior structure (see Fig. 2.5).

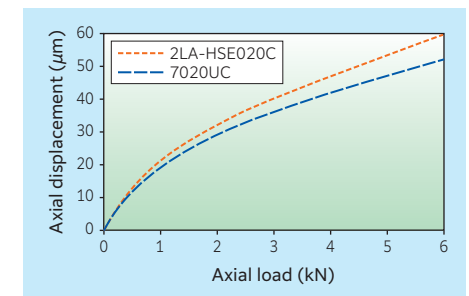


Fig. 2.5

Material of rolling element (ceramic and steel)

Certain **NTN** bearings incorporate ceramic rolling elements. As Young's modulus of silicon nitride (308 GPa) is greater than that of bearing steel (208 GPa), the rigidity with this type of bearing is accordingly greater (see **Fig. 2.6**).

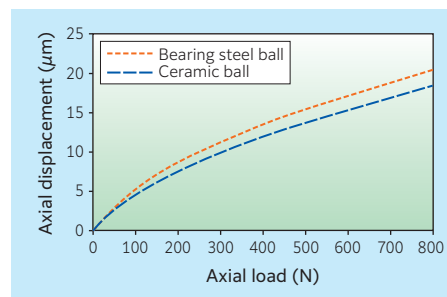


Fig. 2.6

Bearing contact angle

A smaller contact angle on an angular contact ball bearing results in greater radial rigidity. When used as a thrust bearing, this type of bearing should have a greater contact angle to enable greater axial rigidity (see **Fig. 2.7**).

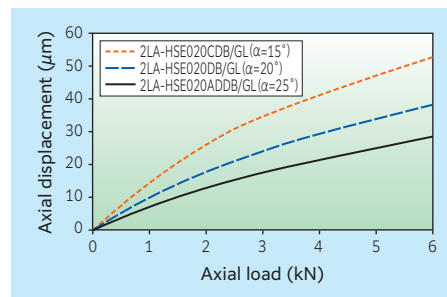


Fig. 2.7

Preload on bearing

A greater preload on a given bearing results in greater rigidity (see **Fig. 2.8**). However, too great of a preload on a bearing can lead to overheating, seizure, and/or early spalling (flaking) of the bearing. It is possible to use bearings in three- or four-row configurations in order to achieve increased axial rigidity (see **Fig. 2.9**).

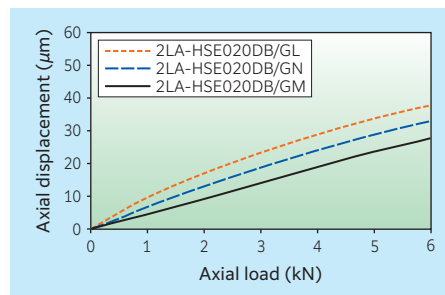


Fig. 2.8

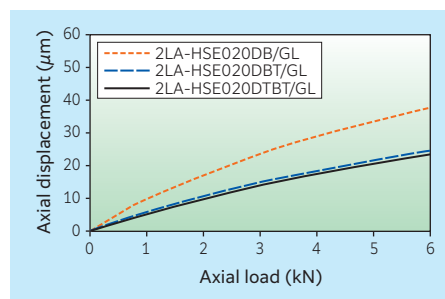


Fig. 2.9

Preloading technique and preload

Bearing preloading techniques can be categorized as fixed position preloading and constant pressure preloading (see **Fig. 2.10**).

Definite position preloading is useful in enhancing the rigidity of a bearing unit, as the positional relationship across individual bearings can be maintained. On the other hand, as preloading is achieved with spring force, the constant pressure preloading technique can maintain a preload constant even when the bearing-to-bearing distance varies due to heat generation on the spindle or a change in load.

The standard preload for a duplex bearing is given in the relevant section for each bearing.

If an angular contact ball bearing is to be used for a high speed application, such as for the main spindle of a machine tool, determine the optimal preload by considering the increase in contact stress between rolling elements and the raceway surface that results from gyratory sliding and centrifugal force. When considering such an application, consult **NTN Engineering**.

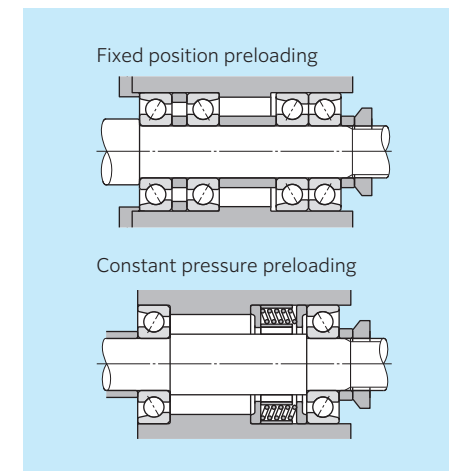


Fig. 2.10

Preload and rigidity

The effect of preloading for an increase in bearing rigidity is summarized in Fig. 2.11.

When the inner rings in the diagram are clamped to bring them together, bearings I and II are each axially displaced by dimension δ_0 , thereby attaining a preload F_0 . In this situation, if an axial load F_a is further exerted from outside, the displacement on bearing

I increases by δ_a , while the displacement on bearing II decreases.

At this point, the loads on bearings I and II are F_I and F_{II} , respectively. When compared with δ_b (the displacement occurring when an axial load F_a is exerted onto a non-preloaded bearing I), displacement δ_a is small. Thus, a preloaded bearing has higher rigidity.

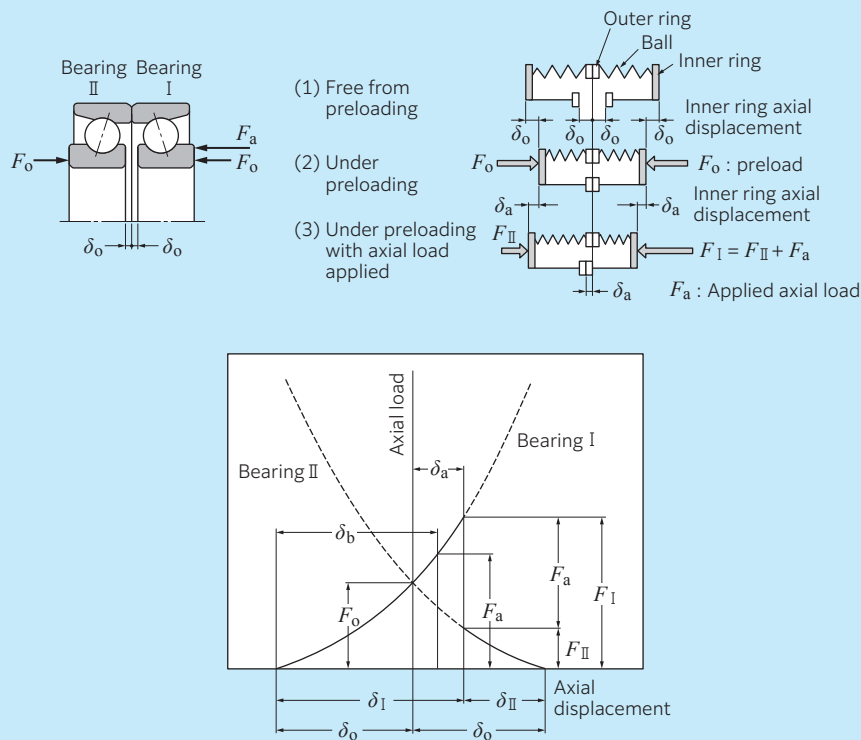


Fig. 2.11 Preload diagram

Gyratory sliding

Every rolling element (ball) in an angular contact ball bearing revolves on the axis of rotation A-A' as illustrated in Fig. 2.12. A revolving object tends to force the axis of rotation to a vertical or horizontal attitude. As a result, the rolling element develops a force to alter the orientation of the axis of rotation. This force is known as a gyratory moment (M).

When the force due to the gyratory moment is greater than the resistance force (rolling element load multiplied by the coefficient of friction between the raceway and rolling element), gyratory sliding occurs on the raceway surface. This leads to heat generation, wear and seizure. Therefore, it is necessary to provide a sufficient resistance force to inhibit gyratory sliding. NTN's recommended preload is based on this theory.

The gyratory moment that will occur can be calculated by the formula below.

$$M = k \times \omega_b \times \omega_c \times \sin \beta \quad M : \text{Gyratory moment}$$

$$k = \frac{1}{10} \times m \times d_w^2 \quad \omega_b : \text{Autorotation angular velocity of rolling element}$$

$$= 0.05 \times \rho \times d_w^5 \quad \omega_c : \text{Angular velocity of revolution}$$

$$M \propto d_w^5 \times n^2 \times \sin \beta \quad m : \text{Mass of rolling element}$$

$$\rho : \text{Density of rolling element}$$

$$d_w : \text{Diameter of rolling element}$$

$$\beta : \text{Angle of axis of rotation of rolling element}$$

$$n : \text{Speed of inner ring}$$

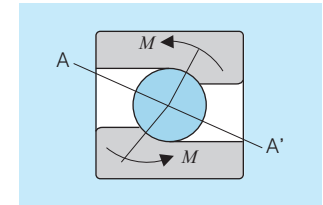


Fig. 2.12 Gyratory sliding

Spin sliding

Every rolling element (ball) in an angular contact ball bearing develops spin sliding that is unavoidable owing to the structure of the bearing, relative to the raceway surface of either the inner ring or outer ring (see Fig. 2.13).

Usually, at a lower speed range, pure rolling motion occurs between an inner ring raceway and rolling elements and spin sliding develops between an outer ring raceway and rolling elements (this state is known as inner ring control). At a higher speed range, pure rolling motion occurs between an outer ring raceway and rolling elements and spin sliding develops between an inner ring raceway and rolling elements (this state is known as outer ring control). A point where transfer from inner ring control to outer ring control occurs is known as control transfer point. An amount of spin sliding and control transfer point can vary depending on the bearing type and bearing data. Generally, the amount of spin sliding will be greater with an outer ring control state.

According to J. H. Rumbarger and J. D. Dunfee, when the amount of spin sliding exceeds 4.20×10^6 (N/mm² · mm/s), increase of heat generation and wear start.

The example of wear on a bearing owing to spin sliding is given in Fig. 2.14.

The magnitude of spin-derived wear is governed by a PV value (amount of spin sliding) during operation of the main spindle. Therefore, the optimum bearing for main spindle must be selected. The possibility of spin-derived wear occurrence varies depending on the bearing type, model number and specifications.

Also, the magnitude of spin-derived wear is significantly affected by how well the raceway surface is lubricated. Regardless of the type of sliding, even minor sliding can lead to wear if oil film is not formed well. For this reason, a reliable lubrication arrangement needs to be incorporated.





Fig. 2.13 Spin sliding

The form of wear on the bearing raceway derived from spin sliding appears as . The wear on the raceway surface on inner ring that resulted from spin sliding is given below.



Bearing: 7026T1
Axial load: 2 kN
Speed: 5 000 min⁻¹
Lubrication: Grease
Run time: 50 h

Possible causes for type wear

(1) Contact ellipse and direction of spin sliding



(2) Sliding velocity (V)



(3) Bearing pressure within ellipse (P)



(4) PV value owing to spin



(5) Wear on raceway surface



Fig. 2.14 Mechanism of wear on bearing owing to spin sliding

2.4 Designing shaft and housing

In designing a bearing and housing, it is very important to provide a sufficient shoulder height for the bearing and housing so as to maintain bearing and housing accuracies and to avoid interference with the bearing related corner radius.

The chamfer dimensions are shown in Table 2.10 and the recommended shoulder height and corner radii on the shaft and housing are listed in Table 2.11.

Bearing corner radius dimensions

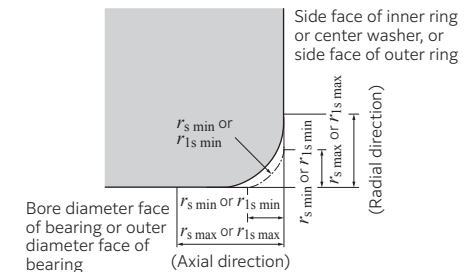


Fig. 2.15

Table 2.10 Allowable critical-value of bearing chamfer
(1) Radial bearings (Except tapered roller bearings)

r_s min ¹⁾ or r_{1s} min	Nominal bore diameter d		r_s max or r_{1s} max	
	over	incl.	Radial direction	Axial direction
0.05	—	—	0.1	0.2
0.08	—	—	0.16	0.3
0.1	—	—	0.2	0.4
0.15	—	—	0.3	0.6
0.2	—	—	0.5	0.8
0.3	—	40	0.6	1
	40	—	0.8	1
0.6	—	40	1	2
	40	—	1.3	2
1	—	50	1.5	3
	50	—	1.9	3
1.1	—	120	2	3.5
	120	—	2.5	4
1.5	—	120	2.3	4
	120	—	3	5
2	—	80	3	4.5
	80	220	3.5	5
	220	—	3.8	6
2.1	—	280	4	6.5
	280	—	4.5	7
2.5	—	100	3.8	6
	100	280	4.5	6
	280	—	5	7
3	—	280	5	8
	280	—	5.5	8
4	—	—	6.5	9
5	—	—	8	10
6	—	—	10	13
7.5	—	—	12.5	17
9.5	—	—	15	19
12	—	—	18	24
15	—	—	21	30
19	—	—	25	38

1) These are the allowable minimum dimensions of the chamfer dimension " r " or " r_1 " and are described in the dimensional table.

(2) Metric tapered roller bearings

r_s min ²⁾ or r_{1s} min	Nominal bore diameter "d" or nominal outside diameter "D"		r_s max or r_{1s} max	
	over	incl.	Radial direction	Axial direction
0.3	—	40	0.7	1.4
	40	—	0.9	1.6
0.6	—	40	1.1	1.7
	40	—	1.3	2
1	—	50	1.6	2.5
	50	—	1.9	3
1.5	—	120	2.3	3
	120	250	2.8	3.5
	250	—	3.5	4
2	—	120	2.8	4
	120	250	3.5	4.5
	250	—	4	5
2.5	—	120	3.5	5
	120	250	4	5.5
	250	—	4.5	6
3	—	120	4	5.5
	120	250	4.5	6.5
	250	400	5	7
	400	—	5.5	7.5
4	—	120	5	7
	120	250	5.5	7.5
	250	400	6	8
	400	—	6.5	8.5
5	—	180	6.5	8
	180	—	7.5	9
6	—	180	7.5	10
	180	—	9	11

2) These are the allowable minimum dimensions of the chamfer dimension " r " or " r_1 " and are described in the dimensional table.

3) Inner rings shall be in accordance with the division of " d " and outer rings with that of " D ".

Note: This standard will be applied to bearings whose dimensional series (refer to the dimensional table) are specified in the standard of ISO 355 or JIS B 1512-3.

For further information concerning bearings outside of these standards or tapered roller bearings using US customary units, please contact NTN Engineering.

(3) Thrust bearings

r_s min ⁴⁾ or r_{1s} min	r_s max or r_{1s} max	
	Radial	axial direction
0.05	0.1	
0.08	0.16	
0.1	0.2	
0.15	0.3	
0.2	0.5	
0.3	0.8	
0.6	1.5	
1	2.2	
1.1	2.7	
1.5	3.5	
2	4	
2.1	4.5	
3	5.5	
4	6.5	
5	8	
6	10	
7.5	12.5	
9.5	15	
12	18	
15	21	
19	25	

4) These are the allowable minimum dimensions of the chamfer dimension " r " or " r_1 " and are described in the dimensional table.

■ Abutment height and fillet radius

The shaft and housing abutment height (h) should be larger than the bearing's maximum allowable chamfer dimensions ($r_{s \max}$), and the abutment should be designed so that it directly contacts the flat part of the bearing end face. The fillet radius (r_a) must be smaller than the bearing's minimum allowable chamfer dimension ($r_{s \min}$) so that it does not interfere with bearing seating. **Table 2.11** lists abutment height (h) and fillet radius (r_a).

For bearings that support very large axial loads, shaft abutments (h) should be higher than the values in the table.




Table 2.11 Fillet radius and abutment height

Unit: mm

Chamfer length	Fillet radius (radius)	Shoulder height h (min)
$r_{s \min}$	$r_{as \max}$	Normal use ¹⁾
0.05	0.05	0.3
0.08	0.08	0.3
0.1	0.1	0.4
0.15	0.15	0.6
0.2	0.2	0.8
0.3	0.3	1.25
0.6	0.6	2.25
1	1	2.75
1.1	1	3.5
1.5	1.5	4.25
2	2	5
2.1	2	6
2.5	2	6
3	2.5	7
4	3	9
5	4	11
6	5	14
7.5	6	18
9.5	8	22
12	10	27
15	12	32
19	15	42

¹⁾ If bearing supports large axial load, the height of the shoulder must exceed the value given here.

Note: $r_{as \max}$ maximum allowable fillet radius.

Where a fillet radius ($r_{a \max}$) larger than the bearing chamfer dimension is required to strengthen the shaft or to relieve stress concentration [see **Fig. 2.16 (a)**], or where the shaft abutment height is too low to afford adequate contact surface with the bearing [see **Fig. 2.16 (b)**], spacers may be used effectively.

Relief dimensions for ground shaft and housing fitting surfaces are given in **Table 2.12**.

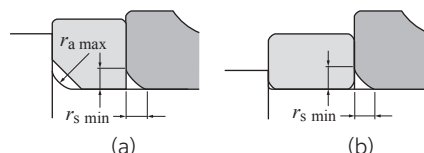


Fig. 2.16 Bearing mounting with spacer




Table 2.12 Relief dimensions for grounding

Unit: mm

$r_{s \min}$	Relief dimensions		
	b	t	r_c
1	2	0.2	1.3
1.1	2.4	0.3	1.5
1.5	3.2	0.4	2
2	4	0.5	2.5
2.1	4	0.5	2.5
2.5	4	0.5	2.5
3	4.7	0.5	3
4	5.9	0.5	4
5	7.4	0.6	5
6	8.6	0.6	6
7.5	10	0.6	7

3. Load Rating and Life

3.1 Bearing life

Even in bearings operating under normal conditions, the surfaces of the raceway and rolling elements are constantly being subjected to repeated compressive stresses which causes **spalling** (flaking, separation) of these surfaces to occur. This **spalling** is due to material fatigue and will eventually cause the bearings to fail. The effective life of a bearing is usually defined in terms of the **total number of revolutions** a bearing can undergo before **spalling** of either the raceway surface or the rolling element surfaces occurs.

Other causes of bearing failure are often attributed to problems such as seizure, abrasions, cracking, chipping, scuffing, rust, etc. However, these so called "causes" of bearing failure are usually caused by improper installation, insufficient or improper lubrication, faulty sealing or improper bearing selection. Since the above mentioned "causes" of bearing failure can be avoided by taking the proper precautions, and are not simply caused by material fatigue, they are considered separately from the **spalling** aspect.

Usually, the load exerted on the main spindle of a machine tool is relatively small compared to the dynamic rated load on the bearing. Therefore, the fatigue life of a bearing seldom poses a problem.

The following operating conditions, rather than a bearing's rating life, can significantly affect the bearing functions (running accuracy, rigidity, heat generation, etc.) and require special consideration.

- (1) High speed operation.
- (2) Heavy preload.
- (3) Large bending of the shaft.
- (4) Large temperature difference between the inner and outer rings.

For further information, please consult **NTN Engineering**.

■ Basic rating life and basic dynamic load rating

A group of seemingly identical bearings when subjected to identical load and operating conditions will exhibit a wide diversity in their durability.

This "life" disparity can be accounted for by the difference in the fatigue of the bearing material itself. This disparity is considered statistically when calculating bearing life, and the **basic rating life** is defined as follows.

The **basic rating life** is based on a 90 % statistical model which is expressed as the **total number of revolutions 90 % of the bearings in an identical group of bearings subjected to identical operating conditions will attain or surpass before spalling due to material fatigue occurs**. For bearings operating at fixed constant speeds, the **basic rating life (90 % reliability)** is expressed in the **total number of hours of operation**.

Basic dynamic load rating expresses a rolling bearing's capacity to support a dynamic load. The **basic dynamic load rating** is the **load under which the basic rating life of the bearing is 1 million revolutions**. This is expressed as pure radial load for radial bearings and pure axial load for thrust bearings. These are referred to as "**basic dynamic load rating (C_r)**" and "**basic dynamic axial load rating (C_a)**." The basic dynamic load ratings given in the bearing tables of this catalog are for bearings constructed of **NTN** standard bearing materials, using standard manufacturing techniques.

The relationship between the basic rating life, the basic dynamic load rating and the bearing load is given in the formula below.

$$\text{For ball bearings: } L_{10} = \left(\frac{C}{P}\right)^3 \dots\dots\dots (3.1)$$

$$L_{10h} = \frac{10^6}{60n} \left(\frac{C}{P}\right)^3 \dots\dots\dots (3.2)$$

For roller bearings: $L_{10} = \left(\frac{C}{P}\right)^{10/3} \dots\dots\dots (3.3)$

$$L_{10h} = \frac{10^6}{60n} \left(\frac{C}{P}\right)^{10/3} \dots\dots\dots (3.4)$$

Where:

- L_{10} : Basic rating life, 10^6 revolutions
- L_{10h} : Basic rating life, h
- C : Basic dynamic load rating, N {kgf}
(C_r : radial bearings, C_a : thrust bearings)
- P : Equivalent dynamic load, N {kgf}
(P_r : radial bearings, P_a : thrust bearings)
- n : Rotational speed, min⁻¹

When several bearings are incorporated in machines or equipment as complete units, all the bearings in the unit are considered as a whole when computing bearing life (see formula 3.5).

$$L = \frac{1}{\left(\frac{1}{L_1^e} + \frac{1}{L_2^e} + \dots + \frac{1}{L_n^e}\right)^{1/e}} \dots\dots\dots (3.5)$$

Where:

- L : Total basic rating life of entire unit, h
- $L_1, L_2 \dots L_n$: Basic rating life of individual bearings, 1, 2, ..., n, h
- $e = 10/9 \dots\dots$ For ball bearings
- $e = 9/8 \dots\dots$ For roller bearings

When the load conditions vary at regular intervals, the life can be given by formula (3.6).

$$L_m = \left(\frac{\phi_1}{L_1} + \frac{\phi_2}{L_2} + \dots + \frac{\phi_j}{L_j}\right)^{-1} \dots\dots\dots (3.6)$$

Where:

- L_m : Total life of bearing, h
- ϕ_j : Frequency of individual load conditions ($\sum \phi_j = 1$)
- L_j : Life under individual conditions, h

■ Adjusted rating life

The basic bearing rating life (90 % reliability factor) can be calculated by the formula (3.2) mentioned. However, in some applications a bearing life factor of over 90 % reliability may be required. To meet these requirements, bearing life can be lengthened by the use of specially improved bearing materials or manufacturing process. Bearing life is also sometimes affected by operating conditions such as lubrication, temperature and rotational speed.

Basic rating life adjusted to compensate for this is called "adjusted rating life," and is determined by using the formula (3.7).

$$L_{na} = a_1 \cdot a_2 \cdot a_3 \cdot L_{10} \dots\dots\dots (3.7)$$

Where:

- L_{na} : Adjusted rating life in millions of revolutions (10^6)
- a_1 : Reliability factor
- a_2 : Bearing characteristics factor
- a_3 : Operating conditions factor

● Life adjustment factor for reliability a_1

The value of reliability factor a_1 is provided in **Table 3.1** for reliability of 90 % or greater.

Table 3.1 Reliability factor a_1

Reliability %	L_n	Reliability factor a_1
90	L_{10}	1.00
95	L_5	0.64
96	L_4	0.55
97	L_3	0.47
98	L_2	0.37
99	L_1	0.25
99.2	$L_{0.8}$	0.22
99.4	$L_{0.6}$	0.19
99.6	$L_{0.4}$	0.16
99.8	$L_{0.2}$	0.12
99.9	$L_{0.1}$	0.093
99.92	$L_{0.08}$	0.087
99.94	$L_{0.06}$	0.080
99.95	$L_{0.05}$	0.077

● Life adjustment factor for material a_2

Bearing characteristics concerning life vary according to bearing material, quality of material and use of special manufacturing processes. In this case, life is adjusted by the bearing characteristics factor a_2 .

The basic dynamic load ratings listed in the catalog are based on **NTN's** standard material and process, therefore, the adjustment factor $a_2 = 1$. $a_2 > 1$ may be used for specially enhanced materials and manufacturing methods. If this applies, consult **NTN Engineering**.

● Life adjustment factor for operating conditions a_3

Operating conditions factor a_3 is used to compensate for when the lubrication condition worsens due to rise in temperature or rotational speed, lubricant deteriorates, or becomes contaminated with foreign matters.

Generally speaking, when lubricating conditions are satisfactory, the a_3 factor has a value of one. And when lubricating conditions are exceptionally favorable and all other operating conditions are normal, a_3 can have a value greater than one. a_3 is however less than 1 in the following cases:

- Dynamic viscosity of lubricating oil is too low for bearing operating temperature (13 mm²/s or less for ball bearings, 20 mm²/s for roller bearings)
- Rotational speed is particularly low (pitch circle diameter across rolling elements d_m mm and rotational speed n min⁻¹ is $d_m n$ value < 10 000)
- Bearing operating temperature is too high
- Lubricant is contaminated with foreign matter or moisture

■ Life calculation for machine tool main spindle bearing

By dramatic improvement in bearing materials and bearing manufacturing techniques, bearings can offer a life several times as long as that calculated from the formula (3.7) as long as they are mounted with minimal mounting errors and are fully free from foreign matter and adequately lubricated. This finding was obtained by a series of experiments performed by **NTN**. The formula for calculating life of a machine tool main spindle bearing uses the life correction factor, a_{NTN} . This correction factor is based on a contact stress of 1.5 GPa at the fatigue limit specified in ISO 281: 1990/Amd. 2: 2000 under clean and well lubricated conditions.

■ Bearing life theory (1) Conventional Lundberg-Palmgren (L-P) theory

According to this theory, a stress that governs rolling fatigue is considered, that is, a maximum dynamic shear stress τ_0 that is exerted, at a depth of Z_0 from the rolling contact surface, in a plane parallel with the rolling contact surface. Referring to a theory of Neuber, et. al. which claims that the durability of a material deteriorates as the volume being subjected to a stress application decreases, the L-P theory assumes that a fissure occurring at a weak point of material at around the depth Z_0 reaches the surface and leads to develop failure [spalling (flaking, separation)]. The probability of survival S of a volume V that is subjected to N times of stress application is determined by the formula below according to the Weibull theory.

$$\ell_n \frac{1}{S} \propto \frac{N^e \tau_0^c V}{Z_0^h} \quad (3.8)$$

Where:

- S : Probability of survival of stress volume V
- N : Number of repeated stress applications
- e : Weibull slope (index to represent variation in life)
- τ_0 : Maximum shear stress
- Z_0 : Depth from surface at which maximum shear stress occurs
- c, h : Indexes

From the basic formula for the bearing life relative to rolling fatigue (3.8), a generic life formula below is obtained:

$$L_{10} = \left(\frac{C}{P} \right)^p \quad (3.9)$$

Where:

- L_{10} : Basic rating life, 10^6 revolutions
- C : Basic dynamic load rating, N {kgf}
- P : Dynamic equivalent load, N {kgf}
- p : $(c - h + 2) / 3e$ (point contact)
- $(c - h + 1) / 2e$ (line contact)

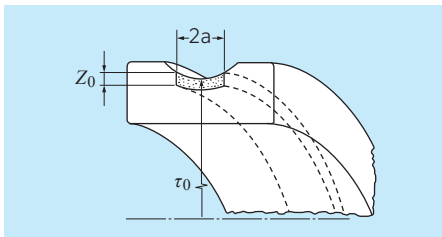


Fig. 3.1 Stress volume resulting from rolling contact according to L-P theory

(2) NTN's new bearing life theory

While the L-P theory intends to define internally occurring spalling owing to the shear stress within a material that results from hertzian contact, **NTN's** new bearing life theory is designed not only to evaluate surface-initiated spalling but also to determine life of each small segment (ΔL_1) based on a local stress (σ_1). This is done by dividing an area from the interior to the contact surface of the material into small segments as illustrated in **Fig. 3.2**, and finally obtaining the overall bearing life L by the formula (3.12).

$$\ell_n \frac{1}{\Delta S_i} \propto \frac{\Delta N_i^e \sigma_i^c \Delta V_i}{Z_i^h} \quad (3.10)$$

$$\Delta L_i = \Delta N_i \propto (\sigma_i^{-c} \Delta V_i^{-1} Z_i^h)^{1/e} \quad (3.11)$$

$$L = \left\{ \sum_{i=1}^n \Delta L_i^{-e} \right\}^{-1/e} \quad (3.12)$$

Where:

- ΔS_i : probability of survival of stress volume ΔV_i of divided segment
- L : Overall bearing life
- Z_i : Depth of divided small stress volume ΔV_i from the surface
- n : Number of segments
- σ_u : Fatigue limit stress
- A stress below which a bearing does not develop failure [spalling (flaking, separation)] under ideal lubrication conditions.
- ISO 281: 1990/Amd. 2: 2000 specifies 1.5 GPa as the maximum contact stress at a fatigue limit. **NTN** uses it as a Von Mises stress equivalent to the maximum contact stress 1.5 GPa.
- When σ_i is smaller than σ_u (fatigue limit), the life of a region in question (ΔL_1) will be infinitely long.




Fig. 3.2 Calculation model

■ NTN's new bearing life formula

The correlation between the **NTN's** life correction factor a_{NTN} and corrected rating life L_{nm} is defined by the formula (3.13) below.

$$L_{\text{nm}} = a_1 \cdot a_{\text{NTN}} \cdot \left(\frac{C}{P} \right)^p \quad (3.13)$$

Where:

- L_{nm} : Corrected rating life, 10^6 revolutions
- a_1 : Reliability coefficient
- a_{NTN} : Life correction factor that reflects material properties, fatigue limit stress, contamination with foreign matter and oil film parameter (Λ) ($0.1 \leq a_{\text{NTN}} \leq 50$)
- C : Basic dynamic load rating, N {kgf}
- P : Dynamic equivalent load, N {kgf}
- p : Index 3 (ball bearing) $10/3$ (roller bearing)

(1) Effect of fatigue limit

NTN's new bearing life formula introduces a concept of fatigue life according to which the bearing life is infinitely long at a particular contact stress as illustrated in **Fig. 3.3** assuming no foreign matter is trapped in the bearing and the bearing is reliably lubricated.

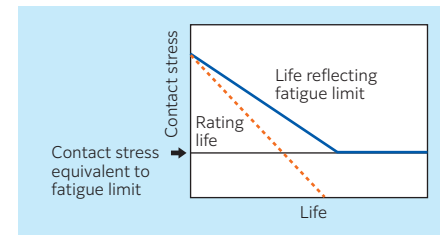


Fig. 3.3 Basic concept of fatigue limit

(2) Effect of foreign matter

The effect of foreign matter is treated as surface-initiated spalling that starts from a dent resulting from trapped foreign matter. **NTN** performs a bearing life calculation, assuming that the size of foreign matter and the stress concentration area in the middle portion (the size of this area corresponds with that of the foreign matter) in the surface layer as well as the amount of foreign matter significantly affect the bearing life.

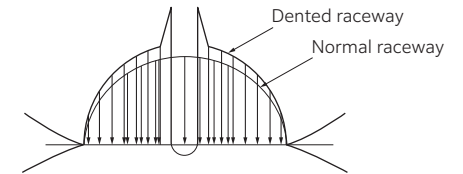


Fig. 3.4 Contact stress distribution resulting from dent

(3) Effect of oil film parameter (Λ)

The oil film parameter can be used to calculate bearing life. The oil film parameter, designated by Λ , is the ratio of the oil film thickness to the roughness of the surface. It can be used to calculate the average stress across the surface layer of two contacting surfaces, such as a rolling element and raceway. From this surface layer stress, the contact stress can be determined. Bearing life is then calculated from the contact stress.

New life calculation formula chart

Various statuses of contamination with foreign matter are defined in **Table 3.2**. The values of ISO codes and NAS classes are those for ball bearings that are subjected to more severe operating conditions.

Table 3.2 Status of contamination

Condition of contamination	Extremely clean	Clean	Normal	Lightly contaminated	Moderately contaminated	Highly contaminated	Severely contaminated
Contamination coefficient	1	0.8	0.5	0.4	0.3	0.2	0.1
Guideline for application	Filtered						No filter
	Less than 10 μm	10 to 30 μm	30 to 50 μm	50 to 70 μm	70 to 100 μm	100 μm or more	Ingress of much dust
ISO cleanliness code (ISO 4406)	13/10	15/12	17/14	19/16	21/18	23/20	25/22
NAS class	4	6	8	10	12	—	—

(1) Effect of foreign matter on correlation between load (P/C) and life correction factor a_{NTN} (see **Fig.3.5** and **Fig.3.6**)

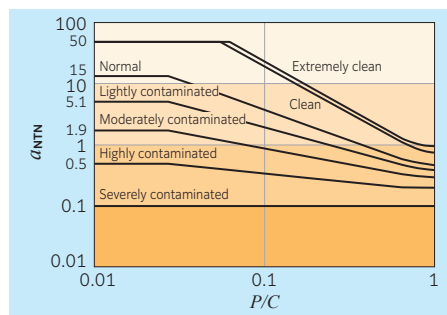


Fig. 3.5 Correlation between P/C and a_{NTN} (effect of foreign matter in ball bearing)

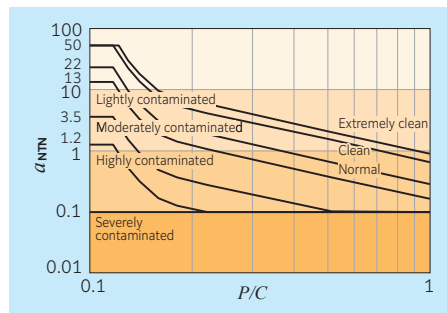


Fig. 3.6 Correlation between P/C and a_{NTN} (effect of foreign matter in roller bearing)

(2) Effect of oil film parameter (Λ) on correlation between load (P/C) and life correction factor a_{NTN} (see **Fig.3.7** and **Fig.3.8**)

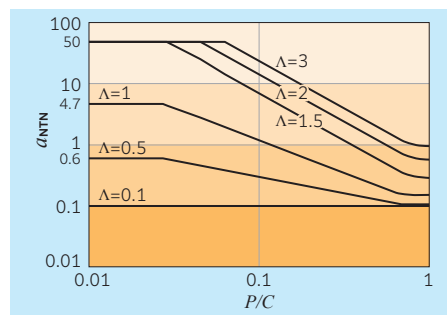


Fig. 3.7 Correlation between P/C and a_{NTN} (effect of Λ with ball bearing)

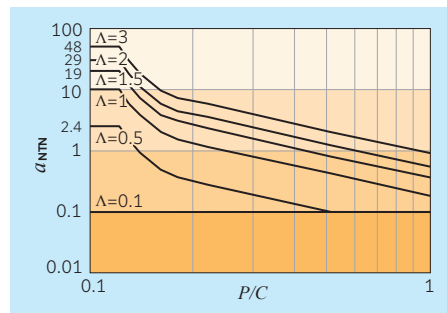


Fig. 3.8 Correlation between P/C and a_{NTN} (effect of Λ with roller bearing)

3.2 Static load rating and allowable axial load

Basic static load rating

When stationary rolling bearings are subjected to static loads, they suffer from partial permanent deformation of the contact surfaces at the contact point between the rolling elements and the raceway. The amount of deformity increases as the load increases, and if this increase in load exceeds certain limits, the subsequent smooth operation of the bearings is impaired.

It has been found through experience that a permanent deformity of 0.0001 times the diameter of the rolling element, occurring at the most heavily stressed contact point between the raceway and the rolling elements, can be tolerated without any impairment in running efficiency.

The basic static load rating refers to a fixed static load limit at which a specified amount of permanent deformation occurs. It applies to pure radial loads for radial bearings and to pure axial loads for thrust bearings. The maximum applied load values for contact stress occurring at the rolling element and raceway contact points are given below.

For ball bearings 4 200 MPa
For roller bearings 4 000 MPa

Referred to as “basic static radial load rating” for radial bearings and “basic static axial load rating” for thrust bearings, basic static load rating is expressed as C_{0r} or C_{0a} respectively and is provided in the bearing dimensions table.

Allowable static equivalent load

Generally the static equivalent load which can be permitted is limited by the basic static rating load as stated above. However, depending on requirements regarding friction and smooth operation, these limits may be lesser than the basic static rating load.

This is generally determined by taking the safety factor S_0 given in **Table 3.3** and formula (3.14) into account.

$$S_0 = C_0 / P_0 \quad (3.14)$$

Where:

S_0 : Safety factor

C_0 : Basic static load rating, N {kgf}
radial bearings: C_{0r}

thrust bearings: C_{0a}

P_0 : Static equivalent load, N {kgf}
radial bearings: P_{0r}
thrust bearings: P_{0a}

Table 3.3 Minimum safety factor values S_0

Operating conditions	Ball bearings	Roller bearings
Applications that require quiet rotation	2	3
Applications subjected to impact loads	1.5	3
Normal rotation applications	1	1.5

Note: When vibration and/or shock loads are present, a load factor based on the shock load needs to be included in the P_0 max value.

● Load Rating and Life

NTN

■ Allowable axial load

A greater axial load can be exerted on a main spindle bearing on a machine tool allowing for tool changes while the machine is stationary. When an angular contact ball bearing is subjected to a larger axial load, the contact ellipse between its rolling elements and raceway surface can overflow the raceway surface (see Fig. 3.9). Furthermore, even if the contact ellipse remains within the raceway surface, overstressing can cause problems such as denting.

The limit of this load is known as the "allowable axial load."

- The end of contact ellipse on the raceway surface reaches the shoulder of either an inner or outer ring.
- The contact stress on the raceway surface reaches 3 650 MPa in either the inner or outer ring raceway.

NTN, the maximum allowable load that does not cause such problems is defined as the "allowable axial load."

Note that the contact stress of 3 650 MPa on the raceway surface is a value that leads to a permanent deformation of 0.00002 to 0.00005 times as much as the rolling element diameter and has been determined through many years of experience.

The allowable axial load for each bearing is found in the associated dimensions table.

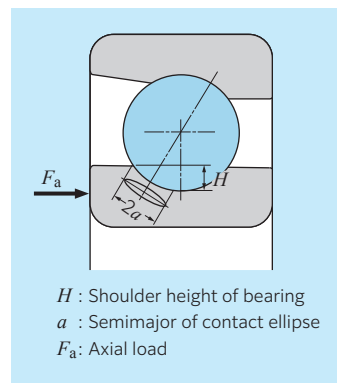


Fig. 3.9

● Allowable Speed

NTN

4. Allowable Speed

High bearing speed leads to high temperature rise on the bearing owing to frictional heating within the bearing. When the temperature of the bearing exceeds a particular limit, the lubricant performance deteriorates significantly, possibly leading to bearing overheating or seizure.

The factors that can affect the maximum allowable bearing speed include:

- (1) Bearing type
- (2) Bearing size
- (3) Lubrication system (grease lubrication, air-oil lubrication, jet lubrication, etc.)
- (4) Internal clearance or preload on the bearing
- (5) Bearing arrangement (2-row to 5-row)
- (6) Bearing load
- (7) Accuracies of shaft, housing, etc.

The maximum allowable speeds listed in the bearing dimensions tables are reference values and are applicable only to individual bearings that are adequately lubricated and correctly preloaded under a condition where the heat is reliably removed from the bearing arrangement.

When using a bearing in a tandem duplex (DT) arrangement of two rows using constant pressure preloading, the allowable speeds is the are multiplied by "0.9". Similarly, when the bearing is subjected to continuous operation in the high speed range, we recommend using the upper limit multiplied by "0.9".

In the case of grease lubrication, these speeds are attainable only when the bearing is filled with an adequate amount of high-quality grease as given in Table 7.3, the bearing is sufficiently run in, and heat is removed by an arrangement such as a cooling jacket. In the case of oil lubrication, these speeds are attained only by an air-oil lubrication system if an adequate amount of ISO VG22 to 32 spindle oil is supplied and the heat is removed by an arrangement such as a cooling jacket. When using a large amount of lubricant, a jet lubrication system excels in lubrication

and cooling performance, and can permit operation at the maximum allowable speed. However, this lubrication system involves a high power loss and should be employed carefully.

■ Speed factor of fixed position preloading

The bearing arrangements (2-row to 5-row) and speed reduction ratios (speed factors) for maximum allowable speed due to post-assembly preloads are summarized in Table 4.1.

The maximum allowable speed of a particular bearing can vary depending on the relation between heat generation and heat dissipation in the bearing as well as how well the bearing is lubricated.

Furthermore, to continue operation at high speeds and with varying preloads, it is recommended that bearings at the upper limit are multiplied by a factor of "0.8".

Table 4.1 Speed factor by bearing arrangement and preload

Bearing arrangement	Matching	GL	GN	GM
	DB	0.85	0.8	0.65
	DBT	0.7	0.6	0.5
	DTBT	0.8	0.75	0.6
	DTBTT	0.7	0.6	0.5

● Bearing Arrangements and Structures of Bearings for Main Spindles NTN

5. Bearing Arrangements and Structures of Bearings for Main Spindles






5.1 Bearing arrangement for main spindles

Typical examples of bearing arrangements for main spindles of machine tools are summarized in **Table 5.1**.








An optimal bearing arrangement must be determined through considerations about the properties required of the main spindle in question (maximum speed, radial and axial rigidities, main spindle size, required

accuracies, lubrication system, etc.). And, machine tool models incorporate built-in motor type main spindles. However, heat generation on a built-in motor can affect the accuracy of the main spindle and performance of lubricant, so a main spindle bearing should be selected very carefully.

Table 5.1 Typical examples of bearing arrangements for main spindles

Bearing arrangement for main spindle	Bearing type	Typical applications
 Gear-driven configuration	[Type I] Tapered roller bearing + Tapered roller bearing + Double-row cylindrical roller bearing	Large turning machine Oil country lathe General-purpose turning machine Lubrication method ● Grease lubrication
 Belt-driven configuration	[Type II] Double-row cylindrical roller bearing + Double-direction angular contact thrust ball bearing + Double-row cylindrical roller bearing	CNC turning machine Machining center Boring machine Milling machine Lubrication method ● Grease lubrication
 Belt-driven configuration	[Type III] Double-row cylindrical roller bearing + Angular contact ball bearing for axial load + Double-row cylindrical roller bearing NOTE: high speed variant of type II	CNC turning machine Machining center Milling machine Lubrication method ● Grease lubrication
 Belt-driven configuration	[Type IV] Duplex angular contact ball bearing (DBT arrangement) + Double-row cylindrical roller bearing NOTE: high speed variant of type II or III	CNC turning machine Machining center Milling machine Lubrication method ● Grease lubrication
 Built-in motor-driven configuration	[Type V] Double-row cylindrical roller bearing + High speed duplex angular contact ball bearing for axial load + Single-row cylindrical roller bearing NOTE: high speed variant of type III with built-in motor-driven configuration	CNC turning machine Machining center Milling machine Lubrication method ● Grease lubrication ● Air-oil lubrication

● Bearing Arrangements and Structures of Bearings for Main Spindles NTN

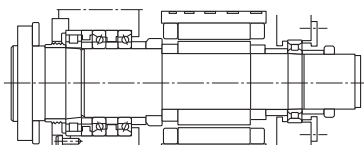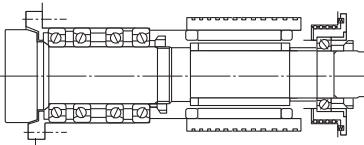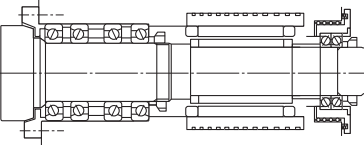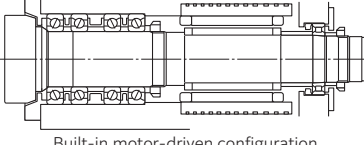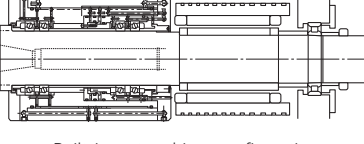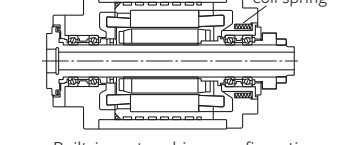Bearing arrangement for main spindle	Bearing type	Typical applications
 Built-in motor-driven configuration	[Type VI] Single-row cylindrical roller bearing + Angular contact ball bearing for axial load + Single-row cylindrical roller bearing NOTE: high speed variant of type V	CNC turning machine Machining center Lubrication method ● Grease lubrication ● Air-oil lubrication
 Built-in motor-driven configuration	[Type VII] Duplex angular contact ball bearing (DTBT arrangement) + Single-row angular contact roller bearing (w/ ball slide) NOTE: ultra high speed variant	Machining center <vertical> Lubrication method ● Grease lubrication ● Air-oil lubrication
 Built-in motor-driven configuration	[Type VIII] Duplex angular contact ball bearing (DTBT arrangement) + Duplex angular contact roller bearing (w/ ball slide) NOTE: ultra high speed variant	Machining center <vertical> Lubrication method ● Grease lubrication ● Air-oil lubrication
 Built-in motor-driven configuration	[Type IX] Duplex angular contact ball bearing (DTBT arrangement) + Single-row cylindrical roller bearing NOTE: ultra high speed variant	Machining center Lubrication method ● Grease lubrication ● Air-oil lubrication
 Built-in motor-driven configuration	[Type X] Adjustable preload bearing unit + Duplex angular contact ball bearing (DBT arrangement) + Single-row cylindrical roller bearing NOTE: high-rigidity/ultra high speed variant	Machining center Lubrication method ● Air-oil lubrication
 Built-in motor-driven configuration	[Type XI] Duplex angular contact ball bearing (DT arrangement) + Duplex angular contact ball bearing (DT arrangement)	Machining center Small turning machine Grinding machine Lubrication method ● Grease lubrication ● Air-oil lubrication
 Belt-driven configuration	[Type XII] Duplex angular contact ball bearing (DT arrangement) + Duplex angular contact ball bearing (DT arrangement)	Grinding machine Lubrication method ● Grease lubrication ● Air-oil lubrication ● Oil-mist lubrication

● Bearing Arrangements and Structures of Bearings for Main Spindles NTN

5.2 Bearing selection based on bearing arrangement for main spindle

An optimal bearing product that best suits the application is selected by referring to the bearing selection table in **Table 5.2**, which contains the possible bearing arrangements for main spindles.

- Designate the free side and fixed side.
- Select the bearing arrangement type (I to XII) on the free or fixed side.
- Select a set of bearing specifications applicable to the selected arrangement type.
- Choose a lubrication system suitable for the selected bearing specifications.
- Select a product group that satisfies the above-mentioned considerations.

● Bearing Arrangements and Structures of Bearings for Main Spindles NTN

Table 5.2 Bearing selection table

Fix side	Free side	Bearing specifications	Lubrication system	Applicable product groups		Considerations for selection procedure
				Steel balls/ceramic balls		
Duplex angular contact ball bearing or adjustable preload bearing mechanism + Duplex angular contact ball bearing	Single-row angular contact ball bearing or duplex angular contact ball bearing (w/ ball bush)	Angular contact ball bearing for radial load	Air-oil lubrication	Sealed	[15°, 25°] 79 LLB/SS-79 LLB 70 LLB/SS-70 LLB [15°, 20°, 25°] 2LA-BNS9 LLB/SS-2LA-BNS9 LLB 2LA-BNS0 LLB/SS-2LA-BNS0 LLB	Bearing selection ① High speed performance (general) High ⇔ Low Contact angle 15°, 20°, 25°, 30° ② Rigidity • Radial rigidity High ⇔ Low Contact angle 15°, 20°, 25°, 30° • Axial rigidity Low ⇔ High Contact angle 15°, 20°, 25°, 30°, 40°, 60° • Complex rigidity (radial and axial) High (4-row)  Medium (3-row)  Low (2-row) 
				Grease lubrication	[15°] 78C 72C [15°, 25°, 30°] 79U/SS-79U, 70U/SS-70U [15°, 20°, 25°] 2LA-HSE9U/SS-2LA-HSE9U 2LA-HSE0/SS-2LA-HSE0 Bearings for grinding machines/motors [15°] BNT9/SS-BNT9 BNT0/SS-BNT0 BNT2/SS-BNT2	
				Ultra high speed/dedicated air-oil lubrication series [25°] SS-2LA-HSF0	Eco-friendly type [20°, 25°] SS-2LA-HSL9U SS-2LA-HSL0 SS-2LA-HSFL0 With re-lubricating hole on the outer ring [20°, 25°] SS-2LA-HSEW9U SS-2LA-HSEW0	
Cylindrical roller bearing + Duplex angular contact ball bearing	Double-row cylindrical roller bearing or single-row cylindrical roller bearing	Cylindrical roller bearing	Grease lubrication	Double-row	NN30/NN30K NN30HS/NN30HSK NN30HST6/NN30HST6K NN30HSRT6/NN30HSRT6K NN49/NN49K NNU49/NNU49K	③ Recommended arrangement 4-row (DTBT) or 2-row (DB) ④ Recommended lubrication specifications Standard main spindle: Grease High speed main spindle: Air-oil Low-noise: Grease or eco-friendly air-oil
				Single-row	N10HS/N10HSK N10HSRT6/N10HSRT6K	
				Eco-friendly type N10HSLT6/N10HSLT6K	[30°] HTA9UA HTA0UA/SS-HTA0UA [40°] HTA9U HTA0U/SS-HTA0U [60°] 5629/5629M 5620/5620M	
Bearing arrangement [Type II, III, V or VI]	Bearing arrangement [Type I, II, III, IV, V, VI, IX or X]	Angular contact ball bearing for axial load	Grease lubrication	Single-row		⑤ Presence of cooling jacket around the bearing. In particular, grease lubrication is recommended.
		Contact angle less than 60°				
Tapered roller bearing + Cylindrical roller bearing	Bearing arrangement [Type I]	Thrust contract ball bearing	Oil lubrication	Grease lubrication		
		Cylindrical roller bearing			329XU 4T-320X/320XU Inch series tapered roller bearing	

5.3 Adjustable preload bearing unit

A recent trend in the machine tool industry is a steady increase of operating speeds. The maximum $d_m n$ value [pitch circle diameter across rolling elements d_m (mm) multiplied by speed n (min^{-1})] reached by main spindles with air-oil lubricated lubrication can be as high as 2.5 to 3.8×10^6 . At the same time, main spindles are requiring increased rigidity. Therefore, main spindle bearings must be capable of both high speed operation and high rigidity. This can be achieved through optimal preloading.

A fixed preload (spring preload) system is usually employed to satisfy both these high speed and high rigidity requirements. A spindle unit with fixed-position preload that is adjustable for different speed conditions is advantageous for optimizing the rigidity of the unit.

The **NTN Adjustable Preload Bearing Unit** is a high speed, high-rigidity unit that features fixed position preload that can be adjusted for different speed conditions.

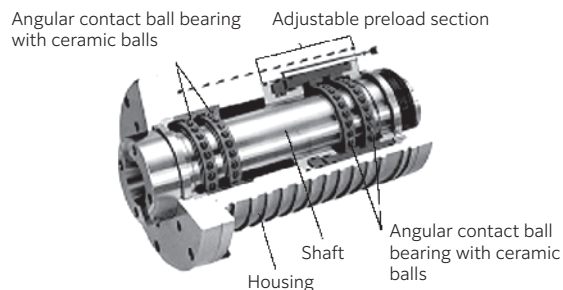


Fig. 5.1 Typical spindle configuration incorporating adjustable preload bearing unit

The typical spindle configuration incorporating adjustable preload bearing unit is illustrated in **Fig. 5.1**. Hydraulic pressure is used to shift the position of the adjustable preload sleeve situated in the rear bearing section of the unit. This changes the preload on the bearings.

A spindle incorporating a 3-step adjustable preload bearing unit is illustrated in **Fig. 5.2**. The sleeve in the adjustable preload section is comprised of two hydraulic pressure chambers, A and B, as well as a spiral groove for sliding motion. The preload can be adjusted to one of three settings by changing the hydraulic pressure in each of the chambers. To achieve instantaneous and reliable adjustment, high-pressure oil (at the same pressure as in the hydraulic chambers) is supplied to the spiral groove on the outside of the sleeve. This oil provides lubrication so that the sleeve can move smoothly.

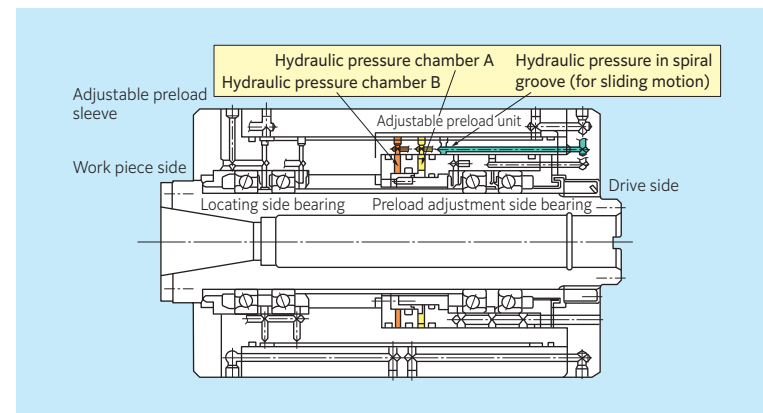


Fig. 5.2 Typical spindle configuration incorporating 3-step adjustable preload type bearing unit

Operating mechanism

Fig. 5.3 shows the hydraulic operation of the unit for three preloading conditions as well as the associated motion of the adjustable preload sleeve.

Low speed operation (heavy preload): Chamber A is pressurized.

Component ① moves to the right by a preset clearance L_1 and contacts Component ②. The axial clearance is δ_1 [see **Fig. 5.3 (a)**].

Medium speed operation (medium preload): Chamber B is pressurized.

Components ① and ③ move to the right by a preset clearance L_2 , causing Component ③ to contact Component ④. The axial clearance is δ_2 [see **Fig. 5.3 (b)**].

High speed operation (light preload): Chambers A and B are not pressurized.

Components ① and ③ return ¹⁾ to the left due to the reaction force on the bearing. This causes Component ③ to contact Component ⑤, thereby returning the axial clearance to the initial setting of δ_3 [see **Fig. 5.3 (c)**].

1) The return motion of the components ① and ③ is achieved by the reaction force of bearing or a separately provided spring.

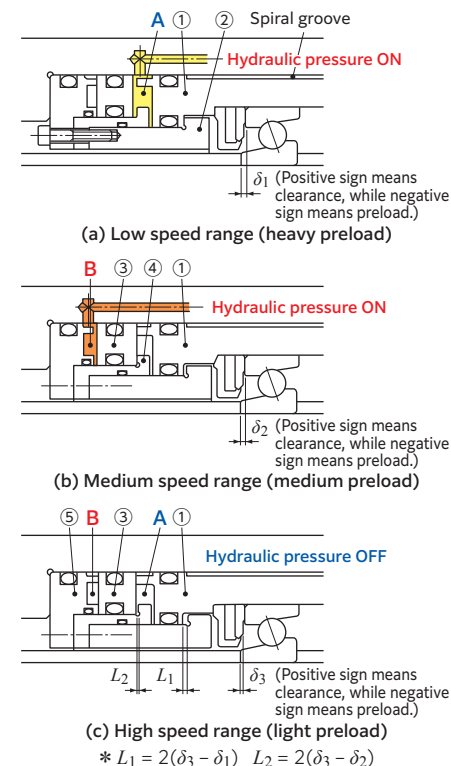


Fig. 5.3 Operating mechanism of adjustable preload

5.4 Bearing jacket cooling system

With a built-in motor drive system, the main spindle is directly driven by a motor and is therefore suitable for rapid acceleration or deceleration. However, this system can be adversely affected by temperature rise. A cooling jacket with a spiral groove around the housing allows cooling oil to flow through the unit.

If heat generated by the motor affects the bearing, overheating of the bearing as well as degradation of the grease can occur.

■ Considerations about cooling of jacket

A typical bearing arrangement is shown in Fig. 5.4 and Fig. 5.5, comprising a double-

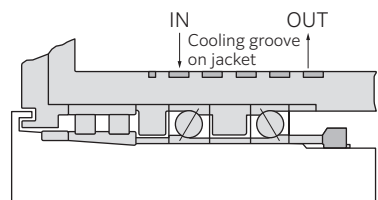


Fig. 5.4 Inadequate cooling groove on jacket

row cylindrical roller bearing and an angular contact ball bearing set. The cooling groove on the jacket in Fig. 5.4 starts at around an area above the angular contact ball bearings and does not cool the double-row cylindrical roller bearing effectively (The fit of the angular contact ball bearings with the bore of the housing is a loose fit, the bearings are not in direct contact with the housing). In the configuration in Fig. 5.5, the cooling groove extends to the region above the double-row cylindrical roller bearing, and cools both the angular contact ball bearings and the double-row cylindrical roller bearing effectively (see Fig. 5.6 and Fig. 5.7).

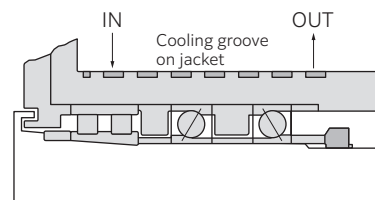


Fig. 5.5 Adequate cooling groove on jacket

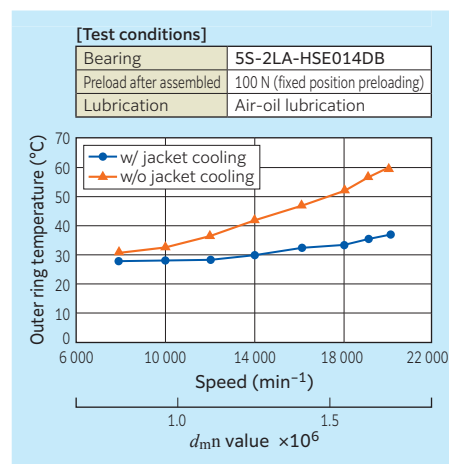


Fig. 5.6 Variation in bearing temperature depending on presence/absence of jacket cooling (angular contact ball bearing)

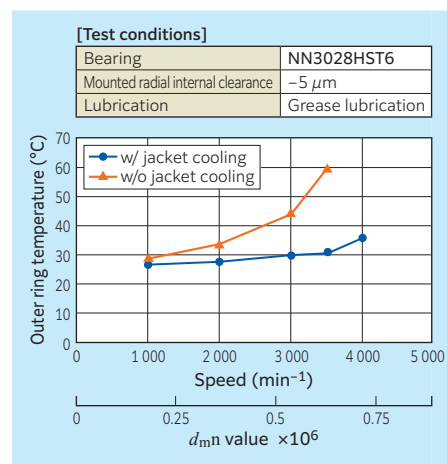


Fig. 5.7 Variation in bearing temperature depending on presence/absence of jacket cooling (cylindrical roller bearing)

6. Handling of Bearings

6.1 Cleaning and filling with grease

To achieve maximum speed and limited temperature rise with a precision rolling bearing, it is vital to handle the bearing correctly.

The handling of bearings involves cleaning, drying, filling with grease (if necessary), and the running-in operation. For each step, follow the precautions and instructions.

A sealed bearing contains prefilled grease. Do not clean (rinse) and dry this type of bearing. Only wipe away rust-preventive oil with a clean cloth before assembling the bearing.

■ Cleaning (removal of rust-preventive oil)

- Immerse the bearing in kerosene or a highly volatile solvent such as naphthosol and wash it turn the by hand. Then remove the kerosene using benzene or alcohol. Use clean compressed air to blow away the rinsing fluid.
(For air-oil lubrication, it is recommended that after cleaning, the bearing should either be coated with the application specific lubricant or a less viscous oil)

■ Drying

If the bearing is to be used with grease lubrication, it is necessary to thoroughly dry the bearing to avoid leakage of grease. After drying, be sure to immediately fill the bearing with grease.

Drying can be performed by blowing hot air onto the bearing or placing the bearing in a chamber at constant temperature. When drying by hot air, be sure to consider the cleanliness of the air.

● Handling of Bearings

NTN

■ Filling with grease

The procedures for greasing ball and roller bearings can be found below.

After filling with grease, turn the bearing by hand to uniformly distribute the grease to the whole rolling surface.

<Ball bearings> See Table 6.1

- By using an injector or small plastic bag, fill grease between balls in equal amounts, aiming at the inner ring raceway surface.
- For a bearing with a ring-guided cage, also apply grease to the guide surface of the cage using a spatula or similar tool.

Table 6.1 Filling grease into angular contact ball bearing

	By using an injector, fill grease between balls in equal amounts, aiming at the raceway surface of the inner ring. Apply grease to the guide surface as well for outer ring guide cages.
	[After completion of filling]
	Turn the bearing by hand while applying an appropriate load in the contact angle direction so that the any area in the interior of bearing is sufficiently lubricated with grease. When doing so, check that the grease adheres to the surface of the balls.

- If grease cannot be filled into the inner ring raceway surface because of a small gap between the cage and the inner ring add grease to the outer ring raceway surface. In this case, carefully turn the bearing so that the grease is fully spread on the inner ring side.

<Roller bearings> See Table 6.2

- Apply grease to the outer (inner) side of rollers, and while turning the rollers with fingers, spread the grease to the inner ring side.

Table 6.2 Filling grease into cylindrical roller bearing

	Apply grease to the outer circumference surface of cage.
	Spread the grease over the roller outer diameter surface and end face. Apply grease to the bearing rollers and rotate by hand to coat the inner ring surface. Ensure that grease is coating the end of the roller and cage pocket gaps surrounding the roller.
	[After applying grease] If a lump of grease remains on the cage rib outside diameter surface, the running-in operation can take a longer time. Apply the grease to the outer diameter surface of the cage ribs. Use fingers to coat the surface towards the roller ends (see photo on left).

● Handling of Bearings

NTN

■ Running-in operation

(1) Air-oil or oil-mist lubrication

The running-in operation is relatively simple with oil lubrication because no peak temperature occurs and the bearing temperature stabilizes within a relatively short time. **NTN** recommends that the speed of bearing is to be increased in steps of 2 000 to 3 000 min⁻¹ until the maximum speed is reached.

Every speed setting should be maintained for about 30 minutes. However, for the speed range where the $d_m n$ value (pitch circle diameter across rolling elements multiplied by speed) exceeds 1.0×10^6 , increase the bearing speed in steps of 1 000 to 2 000 min⁻¹ to ensure the stable running.

(2) Grease lubrication

For a grease-lubricated bearing, a running-in operation is very important in attaining stable temperature rise. During a running-in operation, a large temperature rise (peak) occurs while the bearing speed is increased, and then the bearing temperature eventually stabilizes. Refer to the section "6.12 Running in operation for main spindle bearing."

<Ball bearings>

NTN recommends that the bearing speed be increased in steps of 1 000 to 2 000 min⁻¹ and be further increased only after the temperature has stabilized at the current speed setting.

However, for the speed range where the $d_m n$ value exceeds 0.4×10^6 , increase the bearing speed in steps of 500 to 1 000 min⁻¹ to ensure the stable running.

<Roller bearings>

Compared with contact ball bearings, the time to peak temperature or saturation in running-in operation of roller bearings tends to be longer. Also, there will be temperature rise due to whipping of the grease and the temperature rise may be unstable. To cope with this problem, run the roller bearing in the maximum speed range for a prolonged period.

Increase the bearing speed in steps of 500 to 1 000 min⁻¹ only after the bearing temperature has stabilized at the current speed setting.

For the speed range where the $d_m n$ value exceeds 0.3×10^6 , increase the bearing speed in steps of 500 min⁻¹ to ensure safety.

6.2 Mounting

When mounting a bearing to a main spindle, follow either of the mounting techniques described below:

- (1) Press-fitting with hydraulic press
- (2) Mounting by heating bearings

With either technique, it is important to minimize the adverse effects of the mounting process to maintain bearing accuracy.

(1) Press-fitting with hydraulic press

Before press-fitting a bearing with a hydraulic press or hand press, the press-fitting force due to the interference between the shaft and inner ring must be calculated. A hydraulic press having a capacity greater than the required press-fitting force must be used. Next, using an inner ring press-fitting jig, the inner ring is correctly press-fitted to the shoulder of shaft. Please be careful not to exert a force on the outer ring (see Fig. 6.1).

After the press-fitting operation, it is important to measure the accuracies of various portions of the bearing to verify that the bearing has been correctly mounted to the shaft. When using a multi row bearings, measure the runout after assembly and correct misalignment across the outer rings as necessary (see Fig. 6.2 and Fig. 6.3).

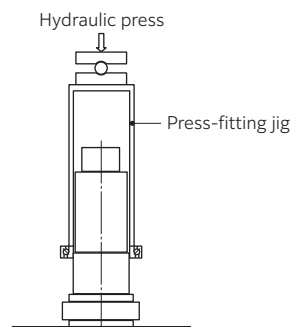


Fig. 6.1 Press-fitting pressure

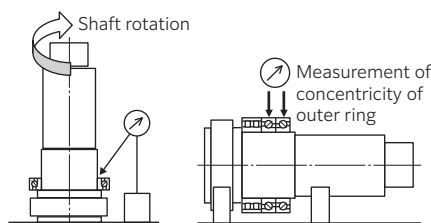


Fig. 6.2 Checking for face runout of inner ring

Fig. 6.3 Checking for concentricity of outer ring

■ Calculation of press-fitting force

The press-fitting force occurring from the interference between the shaft and inner ring can be determined by the formula given below.

According to the calculated press-fitting force, a hydraulic press having a sufficiently large capacity must be used to mount the bearing. The variations in dimensional errors among the bearings should be considered. The force needed to press the inner ring to the shaft can be obtained with the following formula (6.1).

Force to press-fitting inner ring to shaft

$$K_d = \mu \cdot P \cdot \pi \cdot d \cdot B \quad (6.1)$$

Where:

K_d : Force for press-fitting or extracting an inner ring, N

P : Fitting surface pressure, MPa (see Table 6.3)

d : Shaft diameter, inner ring bore diameter, mm

D : Outer ring outside diameter, mm

B : Inner ring, width

μ : Sliding friction coefficient (when press-fitting inner ring over cylindrical shaft: 0.12)

Table 6.3

Fitting conditions and calculation formulas		Symbol (Unit: MPa, mm)
Fitting surface pressure	Fits between solid steel shaft and inner ring $P = \frac{E}{2} \frac{\Delta_{\text{def}}}{d} \left[1 - \left(\frac{d}{D_i} \right)^2 \right] \quad (6.2)$	P : Fitting surface pressure d : Shaft diameter, inner ring bore diameter d_s : Hollow shaft bore diameter D_i : Inner ring average raceway diameter
	Fits between hollow steel shaft and inner ring $P = \frac{E}{2} \frac{\Delta_{\text{def}}}{d} \frac{[1 - (d/D_i)^2] [1 - (d_s/d)^2]}{[1 - (d_s/D_i)^2]} \quad (6.3)$	Δ_{def} : Effective interference E : Modulus of longitudinal elasticity = 208 000

$$\Delta_{\text{def}} = \frac{d}{d+2} \Delta d \quad (6.4)$$

(In the case of a ground shaft)

Δd : Theoretical interference fitting, μm

$$D_i = 1.05 \frac{4d + D}{5} \quad (6.5)$$

<Example of calculation for press-fitting force>

The calculation for press-fitting force for tight fit of 2 μm interference between the shaft and inner ring for the standard angular contact ball bearing is as summarized below:

- Bearing: 7020UC ($\phi 100 \times \phi 150 \times 24$)
- Interference fitting: 2 μm (solid shaft)

$$\Delta_{\text{def}} = \frac{100}{102} \times 0.002 = 0.00196$$

$$D_i = 1.05 \times \frac{4 \times 100 + 150}{5} = 115.5$$

$$P = \frac{208\,000}{2} \times \frac{0.00196}{100} \left[1 - \left(\frac{100}{115.5} \right)^2 \right] = 0.51 \text{ MPa}$$

$$K_d = 0.12 \times 0.51 \times \pi \times 100 \times 24 = 460 \text{ N}$$

To accommodate for variation in the friction, incorporate a safety factor of 2 to 3. As a result, the required press-fitting force is:

$$460 \times (2 \text{ to } 3) = 920 \text{ to } 1\,380 \text{ N}$$

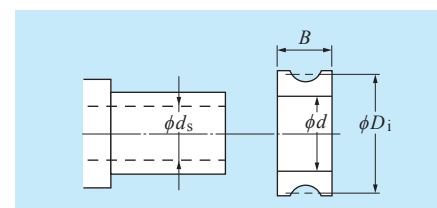


Fig. 6.4

(2) Mounting by heating bearings

When mounting a bearing to a shaft using a constant temperature chamber, bearing heater or the like, follow the instructions below.

Heat the bearing at a temperature that reflects the interference between the shaft and inner ring (see Fig. 6.5).

Using the linear expansion coefficient 12.5×10^{-6} , inner ring bore diameter ϕd , and interference fitting δ , required heating temperature ΔT is calculated.

Interference fitting $\delta = 12.5 \times 10^{-6} \times d \times \Delta T$
Ex.) If $\phi d = 100$ mm, and $\delta = 0.030$ (30 μm , tight fit), then the required heating temperature $\Delta T = 24$ °C.

Therefore, the bearing temperature is heated to approximately room temperature +30 °C to allow for cooling during assembly.

NOTE

- If a resin material is used for the cage of angular contact ball bearing, do not excessively heat the bearing (approx. 80 °C max.).
- As a result of heating bearings after cooling, the inner ring will axially shrink, and there will be clearance between the bearing side face and shaft shoulder (see Fig. 6.6). For this reason, keep the bearing and shaft forced together with a press or the like after the unit returns to normal temperature. After cooling, check that the bearing is mounted to the shaft correctly.
- When using a bearing heater, be sure to avoid overheating. To prevent bearing from being magnetized, use equipment that has a demagnetizing feature.

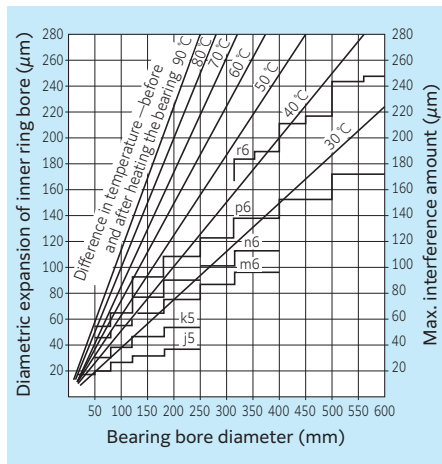


Fig. 6.5 Required heating temperature for mounting by heating inner ring

Remarks: The maximum interference amounts are interference values associated with Class 0 bearings.

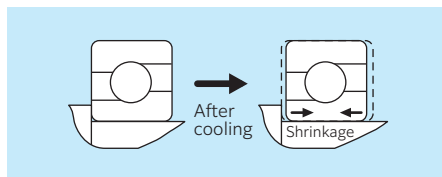


Fig. 6.6 Cooling after mounting by heating bearings

6.3 Clamp of inner ring

When mounting and securing a bearing to a main spindle, the inner ring side face is usually clamped with a stepped sleeve or precision bearing nut, and the front cover situated on the outer ring side face is bolted down. When utilizing a stepped sleeve or precision bearing nut to clamp the inner ring, the following precautions must be followed.

■ Clamp with stepped sleeve

The stepped sleeve is designed that the hydraulically expanded sleeve is inserted over the shaft, and a predetermined drive-up force (clamp force) is applied to the shaft. Then the hydraulic pressure is released in order to secure the sleeve onto shaft and provide a clamp force to the bearing. This technique is a relatively simple locking method (see Fig. 6.7).

Note however after being locked in position by interference with the shaft, the sleeve can come loose because of deflection of the shaft or a moment load applied to the shaft.

For this reason, in many cases, a stepped sleeve is used together with a bearing nut as illustrated in Fig. 6.8.

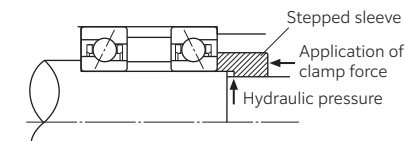


Fig. 6.7 Clamp with stepped sleeve

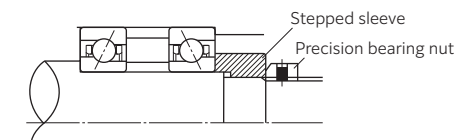


Fig. 6.8 Clamp with stepped sleeve + precision bearing nut

■ Clamp with precision bearing nut

Required clamp force is achieved with the precision bearing nut (precision locknut) by correctly controlling the tightening torque.

Note that when a bearing has been locked with a precision bearing nut (lock nut), the nut can develop inclination owing to the clearance on the threaded portions. If this problem occurs, fine adjustment will be necessary to obtain necessary running accuracy for the shaft.

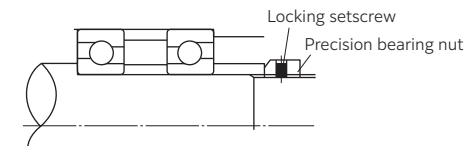


Fig. 6.9 Clamp with precision bearing nut

■ Correlation between tightening torque and clamp force with precision bearing nut

The correlation between tightening torque and clamp force with a precision bearing nut can be defined with the formula given below.

Because the thread face of the precision bearing nut, the thread face of the shaft and the bearing surface and nut constitute sliding surfaces, the correlation between tightening torque and clamp force will vary depending on the friction coefficient. Therefore, the nut needs to be thoroughly run on the shaft thread in advance to ensure smooth and uniform tightening.

It is also necessary to determine the correlation between tightening torque and clamp force by using a load washer or the like in advance.

$$F = \frac{M}{(d/2) \tan(\beta + \rho) + r_n \mu_n} \quad (6.6)$$

F : Precision bearing nut clamp force, N

M : Precision bearing nut tightening torque, N · mm

d : Effective diameter of thread, mm

ρ : Friction angle of thread face, °

$$\tan \rho = \frac{\mu}{\cos \alpha} \quad (6.7)$$

β : Lead angle of thread, °

$$\tan \beta = \text{number of threads} \times \text{pitch} / \pi d \quad (6.8)$$

r_n : Average radius of nut surface, mm

μ_n : Friction coefficient of nut surface

$\mu_n \cong 0.15$

μ : Friction coefficient of thread face

$\mu \cong 0.15$

α : Half angle of thread, °

<Example calculation>

- Precision bearing nut

AN20 (see Fig. 6.10)

- Thread data

M100 × 2 (Class 2 thread)

Effective diameter

$d = \phi 98.701$ mm

Half angle of thread $\alpha = 30^\circ$




Fig. 6.10

The correlation between a tightening torque and clamp force with the precision bearing nut can be calculated as follows:

$$\tan \rho = \frac{0.15}{\cos 30^\circ} \quad \rho = 9.826^\circ$$

$$\tan \beta = \frac{1 \times 2}{\pi \times 98.701} \quad \beta = 0.370^\circ$$

$$r_n = \frac{(101 + 120)/2}{2} = 55.25$$

$$F = \frac{M}{\frac{98.701}{2} \tan(0.370 + 9.826) + 55.25 \times 0.15} = \frac{M}{17.163}$$

6.4 Elastic deformation of spacer by clamp force

When incorporating a bearing into a main spindle, the bearing must be correctly forced into a predetermined position and maintained with a predetermined bearing pressure in order to maintain appropriate accuracies, clearances and rigidities of the bearing and main spindle.

When axially locating a duplex angular contact ball bearing by using a bearing spacer the cross-sectional area of spacer as well as (depending on the clamp force) the bearing pressure and elastic deformation by clamp of the spacer must be considered.

The amount of deformation of a spacer is calculated using the following formula:

$$\delta = \frac{P \times L}{A \times E} \quad (6.9)$$

δ : Elastic deformation, mm

P : Inner ring clamp force, N

L : Inner ring spacer width, mm

A : Inner ring cross-sectional area, mm²

E : Young's modulus 208 000, MPa

The require clamp force exerted onto inner ring spacers varies depending on the bearing manufacturer. From its experience, **NTN** adopts the typical values listed in **Table 6.4** (refer to next page).

■ Correlation between inner ring spacer clamp force and amount of elastic deformation

When securing an angular contact ball bearing onto a main spindle, the bearing inner ring is clamped and locked by the shoulder of main spindle and a precision bearing nut and/or stepped sleeve. This inner ring clamp force causes the spacer to develop elastic deformation in the axial direction, varying the axial clearance on the bearing. In the case of a back-to-back duplex bearing (DB, DTBT or DBT) for a main spindle in particular, the inner ring clamp force will decrease the bearing clearance, estimated leading to an increased post-assembly preload and operating preload. A possible inner ring clamp force-derived axial deformation can develop in the form of deformation of both the inner ring and inner ring spacer. **NTN's** experience has shown that only the elastic deformation on inner ring spacers needs to be considered.




Fig. 6.11 Elastic deformation of inner ring spacer

Table 6.4 Nut clamp force

Bearing bore diameter (mm)	Nut clamp force (N)	Nut tightening torque <reference value> (N · m)	Front cover drive-up (mm)
6	1 470	2	0.01–0.02
8		2	
10		4	
12	2 200	5	
15		8	
17		9	
20	2 940–4 900	10–17	
25		13–22	
30		15–26	
35		18–30	
40	4 900–9 800	34–68	
45		38–75	
50		42–83	
55	9 800–14 700	92–138	
60		100–150	
65		108–162	
70		116–174	
75		124–186	
80	14 700–24 500	199–331	
85		211–351	
90		223–372	
95		235–392	
100		247–412	
105	24 500–34 300	259–432	0.02–0.03
110		271–452	
120		295–492	
130		319–532	
140		572–800	
150	<reference value> (34 300–44 100)	613–858	
160		655–917	
170		695–973	
180		736–1 031	
190		779–1 090	
200	—	818–1 145	
220		—	
240		—	
260		—	
280		—	
300		—	

- Note 1) NTN has specified the nut clamp forces in this table based on experiences. However, NTN has no production record for bore diameter of 220 mm or larger. The nut clamp forces listed are only to be used for reference.
- 2) The nut tightening torque is calculated with a friction coefficient of 0.15 between the nut seating face and screw thread surface.
- 3) When tightening nuts, it is recommended to tighten them to twice the set value, then loosen them, and finally re-tighten them to the recommended set value.
- 4) For ball screw support bearings (BST type), refer to section 13. Ball Screw Support Bearings; sub-section 13.8 Proper control of preload (BST type), page 341.

6.5 Front cover drive-up

When mounting and securing a bearing onto a main spindle, the inner ring is usually clamped with a stepped sleeve or precision bearing nut and the outer ring side is bolted down. When locking the outer ring with a front cover, the following points need to be considered.

■ Front cover pressing amount

The bearing outer ring is tightened and locked between the shoulder of the housing and front cover at the main spindle front section. The front cover is installed by utilizing bolt holes (6 to 8 positions) on its flange. The usual pressing allowance on the outer ring and the front cover, which NTN has adopted through experience, falls in a range of 0.01 to 0.02 mm (see Fig. 6.12). Too large a pressing amount on the outer ring or a smaller number of fastening bolts may lead to poor roundness of the bearing ring, we recommend that you check this by measuring the roundness of the bearing raceway surface as shown in Fig. 6.13.

Typical fit and deterioration in roundness of a raceway surface resulting from a pressing amount of 0.05 mm on the outer ring are shown in Fig. 6.14. Also, typical outer ring pressing amount and deterioration of a raceway surface with a fit of 5 μm loose are provided in Fig. 6.15.

To avoid deformation of the outer ring raceway surface, NTN recommends that the

outer ring be installed to a highly accurate housing in transition fit with a large number of bolts.

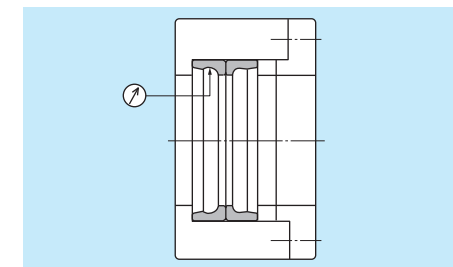


Fig. 6.13 Measuring position for roundness on outer ring raceway surface

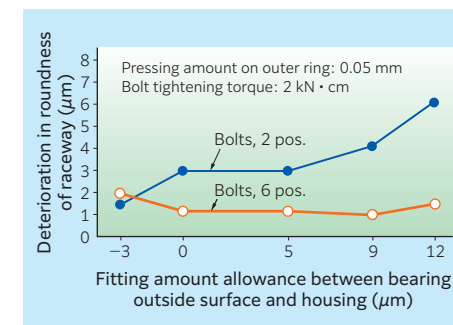


Fig. 6.14 Effect of fit of outer ring on roundness of raceway surface

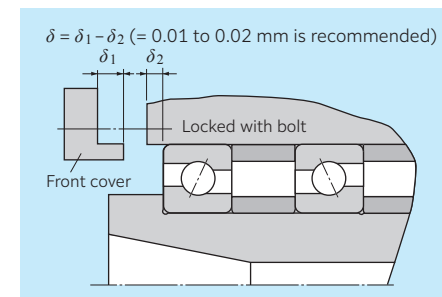


Fig. 6.12 Front cover pressing allowance

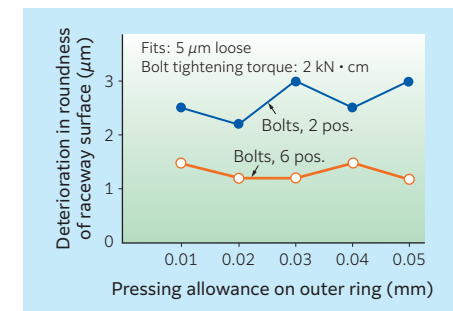


Fig. 6.15 Pressing allowance on outer ring vs. deterioration in roundness of raceway surface

6.6 Checking axial rigidity

In the method for checking for the axial rigidity of a bearing installed to a machine tool, the main spindle itself is pushed with a push-pull gauge to measure the resultant axial displacement. A method using a dial gauge is described below.

Two dial gauge are placed on two locations (axisymmetric locations separated by 180°) at the leading end of the main spindle. Use magnetic stands to secure the dial gauge to the end face of housing. Then, apply the load onto the main spindle and the resultant axial displacement is measured.

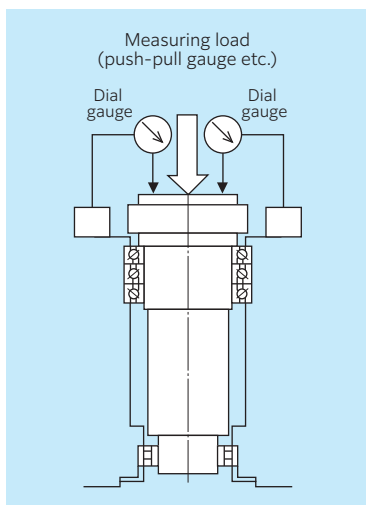


Fig. 6.16 Checking for axial rigidity

6.7 Clearance adjustment for cylindrical roller bearing

When incorporating a cylindrical roller bearing into a main spindle of a machine tool such as an NC turning machine or machining center, and setting the internal clearance to zero or to a negative clearance, the inner ring of the bearing usually has a tapered bore.

The internal clearance is adjusted by fitting the tapered bore bearing onto the tapered portion of the main spindle and driving the bearing in the axial direction to expand the inner ring.

For adjusting the internal clearance, two methods are available: a method consisting of clearance measurement for each bearing and adjustment with a spacer (s), and a mounted internal clearance adjustment gauge.

■ Method with clearance measurement and adjustment with spacer (s)

Adjust the bearing internal clearance by following the procedure described below:

(1) Calculation of outer ring shrinkage (see Fig. 6.17)

- Calculate the interference at the fitting area Δ_{def} between the outer ring and housing.

Measure the housing bore diameter first, and then calculate the interference Δ_{def} from the outer ring outside diameter listed on the bearing inspection sheet.

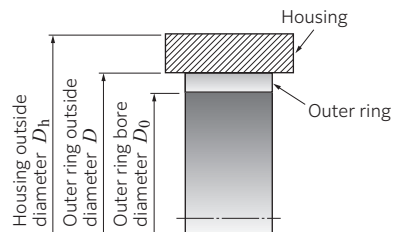


Fig. 6.17 Fits of outer ring and housing

EX. 1

Bearing outer ring outside diameter

$\phi 150$ mm (Inspection sheet = -0.005)

Housing bore diameter D

$\phi 150$ mm (measurement value = -0.007)

Interference at fitting area

$\Delta_{def} = 0.002$ (2 μ m tight)

- Calculate the outer ring shrinkage ΔG with the formula (6.10).

$$\Delta G = \Delta_{def} \cdot \frac{D_0}{D} \cdot \frac{1 - (D/D_h)^2}{1 - (D_0/D)^2 \cdot (D/D_h)^2} \quad (6.10)$$

EX. 2

Housing outside diameter $D_h = \phi 200$, outer

ring outside diameter $D = \phi 150$, outer ring

bore diameter $D_0 = \phi 137$

$$\Delta G = 0.002 \cdot \frac{137}{150} \cdot \frac{1 - (150/200)^2}{1 - (137/150)^2 \cdot (150/200)^2} = 0.0015 \quad (6.11)$$

(2) Measurement of bearing position and bearing radial clearance on a temporarily mounted bearing

- Mount the bearing inner ring with the cage and rollers onto the tapered shaft (see Fig. 6.18).

In this process, force the inner ring until its tapered bore face is fully seated, and then measure the distance between the shaft shoulder and inner ring side face (L_1).




Fig. 6.18 Measurement of bearing position




Fig. 6.19 Measurement of bearing radial clearance




Fig. 6.20 Clearance measurement after insertion of spacer

NOTE: After mounting the inner ring, check that the bearing side face is square to the main spindle centerline.

- At this point, mount the outer ring, move the outer ring up and down by hand and then measure the internal clearance after mounting (Δr_1) (see Fig. 6.19).
- Calculate the estimated bearing clearance Δ_1 after press-fitting the outer ring into the housing with the formula (6.12). The result of the calculation reflects the outer ring shrinkage ΔG .

$$\Delta_1 = \Delta r_1 - \Delta G \quad (6.12)$$

EX. 3

Internal clearance after mounting $\Delta r_1 = 0.030$

Outer ring shrinkage $\Delta G = 0.0015$

Estimated bearing clearance $\Delta_1 = 0.030 - 0.0015 = 0.0285$

(3) Adjustment of spacer width between shaft shoulder and inner ring

To adjust the bearing clearance to a predetermined target value (δ) after mounting, determine the spacer width L_n with the formula (6.13) (see Fig. 6.20 and Fig. 6.21).

$$L_n = L_1 + f(\delta - \Delta_1) \quad (6.13) \quad (n = 2, 3, 4 \dots)$$

The value f in the formula (6.13) is found in the Table 6.5 (refer to next page).

Table 6.5 Value f

Value d_m/d_i	Value f
0 -0.2	13
0.2-0.3	14
0.3-0.4	15
0.4-0.5	16
0.5-0.6	17
0.6-0.7	18




Fig. 6.21 Explanation of d_m / d_i

EX. 4

In the case of NN3020K, if bearing bore diameter $d = \phi 100$, width $B = 37$, and $d_i = d + 1/12 \cdot B/2$,

then $d_i = \text{dia. } \phi 101.5417$.

If the targeted post-mounting clearance value $\delta = 0.015$, $L_1 = 15$, $d_m = \phi 60$, $\Delta_1 = 0.0285$, then $d_m/d_i = 60/101.5417 = 0.5909$, and, therefore, $f = 17$.

Thus, the spacer width L_n between the shoulder and inner ring equivalent to $\delta = 0.015$ will be the value shown by the formula below:

$$L_n = 15 + 17 \times (0.015 - 0.0285) = 14.7705$$

(4) Bearing clearance measurement after insertion of spacer (see Fig. 6.20)

Insert a spacer that satisfies the spacer width L_n between the shoulder and inner ring determined in the previous step, and clamp the inner ring until the spacer does not move. Next, move the bearing outer ring up and down by hand and measure the internal clearance after mounting (post-mounting internal clearance) Δr_n . The estimated bearing clearance Δ_n after press-fitting of the outer ring into the housing is determined with the formula below:

$$\Delta_n = \Delta r_n - \Delta G \quad (6.14)$$

($n = 2, 3, 4 \dots$)

(5) Final adjustment for spacer width

- Repeat the steps (3) and (4) above to gradually decrease the spacer width L_n so as to adjust the post-mounting bearing clearance to the targeted clearance.
- By plotting the correlation between the spacer width and post-mounting clearance as illustrated in Fig. 6.22, the spacer width for the final targeted clearance will be more readily obtained.

Positive clearance:

All rollers are sliding rather than rolling.

Clearance = 0:

About half of the rollers are rolling but the rest are sliding.

Negative clearance:

All rollers are rolling.

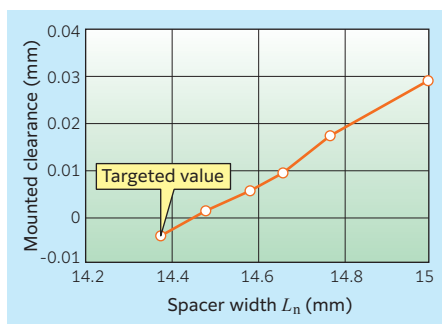


Fig. 6.22 Correlation between spacer width L_n and mounted clearance Δ_n

■ Method using mounted internal clearance adjustment gauge

The mounted internal clearance adjustment gauge has a cylindrical ring, which has a cut-out so that the ring can be opened and closed. The bore surface of the ring is used as a location for measurement. The clearance at the location for measurement is proportional to the reading on the dial gauge. As illustrated in Fig. 6.23, the mounted internal clearance adjustment gauge consists of a ring gauge, dial gauge, and attachment components. Its fixture protects the interference gauge against possible deformation when not in use. For the measuring operation, detach the fixture.

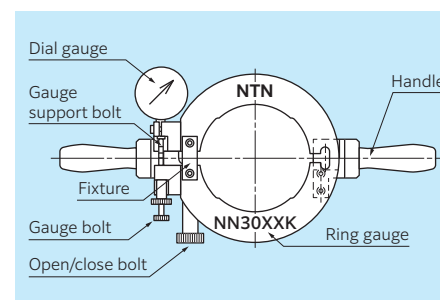


Fig. 6.23 Descriptions of various components on mounted internal clearance adjustment gauge

● Usage of mounted internal clearance adjustment gauge

(1) Measurement of outer ring raceway diameter (bore diameter)

- Mount the outer ring into the housing. (For easy mounting, heat the housing.)
- Wait until the temperature of the outer ring is same as that of the inner ring, and then measure the outer ring raceway diameter (bore diameter). Take measurements at several points and calculate the average, and then zero the gauge at this average value (see Photo 6.1).



Photo 6.1

(2) Setup of mounted internal clearance adjustment gauge

- Place the cylinder gauge, onto the bore surface of clearance adjustment gauge as shown in **Photo 6.2**, and adjust it with the open/close bolt so that its Dial 1 is set to zero.
- When the reading of Dial 1 of the cylinder gauge is zero, adjust the gauge bolt so that the pointer of Dial 2 points at the red mark (correction amount of the gauge) (see **Photo 6.3**).

With the gauge bolt, adjust the gauge so that the short pointer is situated at the scale 2 position (With the large size, insert the pin into the hole of the open/close bolt and make fine-adjustment).

NOTE 1) **Photo 6.3** shows the inner ring and rollers. When the correction amount of the gauge is adjusted, adjust it only with the thickness gauge.

NOTE 2) The pointer of Dial 2 is directed to the red mark. The purpose of this is to compensate clearance error caused due to the structure of mounted internal clearance adjustment gauge. The correction amount can vary from gauge to gauge.

NOTE 3) When the pointer of Dial 2 is in line with the red mark, the zero reading on Dial 2 coincides with the zero bearing clearance.

(3) Setting up the mounted internal clearance adjustment gauge on the main spindle

- Mount the cage and roller with inner ring onto the main spindle, and lightly tighten the precision bearing nut.
- Tightening the open/close bolt (see **Fig. 6.23**) on the clearance adjustment gauge will cause the gauge bore to expand.

With the gauge bore expanded by about 0.15 mm, insert the gauge into the outside

diameter portion of the roller set in the inner ring. Be careful not to damage the rollers (see **Photo 6.4**).

- Loosening the open/close bolt will cause the gauge bore to shrink.

Loosen the open/close bolt to bring the gauge bore into contact with the outside diameter of the roller set in the inner ring.

- Lightly swing the clearance adjustment gauge in the circumferential direction to stabilize the pointer on the dial gauge.

(4) Setup of inner ring clearance

- Tighten the precision bearing nut of the main spindle. This should be done gradually to prevent shock loading.
- Tightening the precision bearing nut further until the reading on the dial of the clearance adjustment gauge becomes zero in case the clearance is aimed at 0 μm .
- Once the reading on gauge gets zero, carefully swing the adjustment gauge again to check that the measurement value is correct.
- Loosen the open/close bolt on the clearance adjustment gauge to expand the gauge bore and remove the gauge from the inner ring.

(5) Determination of spacer width

- The inner ring should now be in the position where the reading on the dial of clearance adjustment gauge was zero in step (4). By using a block gauge, measure the distance between the inner ring side face and shaft shoulder (dimension ℓ in **Fig. 6.24**).
- Measure this dimension in at least three locations, and finally adjust the spacer width ℓ to the average of three measurements.
- Loosen and remove the precision bearing nut, inner ring spacer and inner ring from the main spindle.

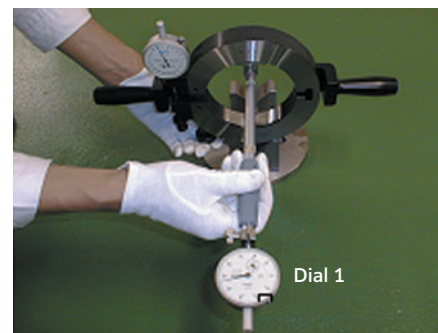


Photo 6.2

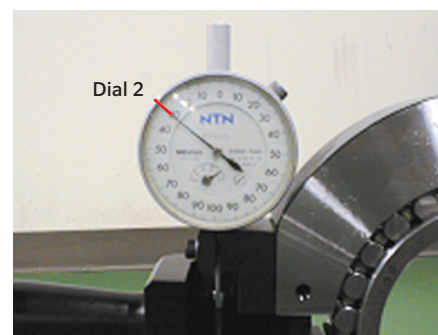


Photo 6.3

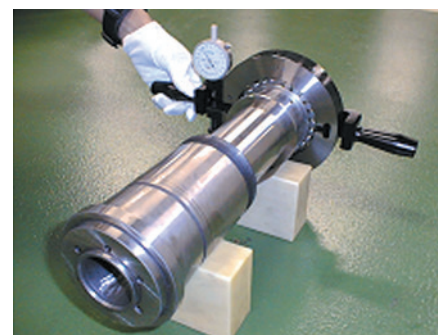


Photo 6.4

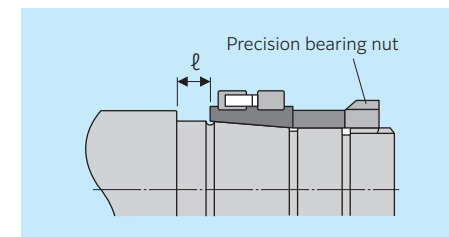


Fig. 6.24 Spacer width dimension

(6) Assembly and check of the mounted roller outside diameter

- Insert a spacer of width ℓ . Then insert the inner ring and mounting spacer and tighten the precision bearing nut.
- According to a procedure similar to that in steps (3) "Setting up the mounted internal clearance adjustment gauge on the main spindle" and (4) "Setup of inner ring clearance", check the mounted roller outside diameter and the clearance setting. Note this process is only a re-check procedure, and may be omitted once the clearance measurements fall in a smaller range.

● Handling of Bearings

NTN

● Replacement of mounted internal clearance by clearance correction factor

(1) Clearance correction factor

Because of the structure of the **NTN** mounted internal clearance adjustment gauge, the ratio of the clearance reading on location for measurement to the reading on dial gauge is 1:2.5 (clearance correction factor), (The clearance reading on the dial gauge is 2.5 times as large as the mounted internal clearance). For reference, a clearance reading conversion table is given in **Table 6.6**.

NOTE: Note that the clearance correction factor of certain bearing numbers is not 1:2.5. Clearance correction factor is given on the table of inspection results.

Table 6.6 Clearance reading conversion table (when clearance correction factor 2.5)

Reading on dial gauge (μm)	Mounted internal clearance on location for measurement (μm)	Reading on dial gauge (μm)	Mounted internal clearance on location for measurement (μm)
0.5	0.2	5.5	2.2
1.0	0.4	6.0	2.4
1.5	0.6	6.5	2.6
2.0	0.8	7.0	2.8
2.5	1.0	7.5	3.0
3.0	1.2	8.0	3.2
3.5	1.4	8.5	3.4
4.0	1.6	9.0	3.6
4.5	1.8	9.5	3.8
5.0	2.0	10.0	4.0

(2) Mounted internal clearance (when clearance indication value 1:2.5)

The reading on the dial gauge is converted into a mounted internal clearance in the following manner:

• CASE 1

The reading relative to the zero point is in the clockwise direction (CW) (see **Fig. 6.25**). The value of the mounted internal clearance (+) is 1/2.5 times as large as the reading on dial gauge.

Reading on dial gauge in **Fig. 6.25** = 2.5
Mounted internal clearance = $2.5/2.5 = (+) 1 \mu\text{m}$

• CASE 2

The reading relative to the zero point is in the counterclockwise direction (CCW) (see **Fig. 6.26**). The value of the mounted internal clearance (-) is 1/2.5 times as large as the reading on dial gauge.

Reading on dial gauge in **Fig. 6.26** = 5.0
Mounted internal clearance = $5.0/2.5 = (-) 2 \mu\text{m}$




Fig. 6.25
Reading on dial gauge: $+2.5 \mu\text{m}$
(mounted internal clearance: $+1 \mu\text{m}$)




Fig. 6.26
Reading on dial gauge: $-5 \mu\text{m}$
(mounted internal clearance: $-2 \mu\text{m}$)

● Handling of Bearings

NTN

● Example for setting mounted internal clearance

When setting the mounted internal clearance, adjust the dial gauge by shifting from the zero point to the "targeted clearance × clearance correction factor".

Examples for when clearance correction factor 2.5 are shown in **Fig. 6.27** and **Fig. 6.28**.

NOTE: Note the direction when adjusting the dial gauge by shifting from the zero point.




Fig. 6.27 Adjustment for negative clearance (mounted internal clearance: $-0.8 \mu\text{m}$)




Fig. 6.28 Adjustment for positive clearance (mounted internal clearance: $+1.0 \mu\text{m}$)

<Precautions for using and storing the mounted internal clearance adjustment gauge>

When using the mounted internal clearance adjustment gauge, follow the precautions described below:

- When transferring the outer ring raceway diameter measured with the cylinder gauge to the mounted internal clearance adjustment gauge, use the adjustment gauge in a vertical attitude (see **Photo 6.5**).
- When not using the mounted internal clearance adjustment gauge, place it in a horizontal attitude (see **Photo 6.6**). Also, after completion of clearance measuring operation, apply rust-preventive oil to the mounted internal clearance adjustment gauge and store in a dry location.



Photo 6.5 Vertical storage attitude




Photo 6.6 Horizontal storage attitude

● Handling of Bearings

NTN

6.8 Tapered bore cylindrical roller bearing and main spindle taper angle

In order for a precision bearing to perform as designed, it must be correctly mounted to a shaft and housing. In particular, when employing a tapered bore cylindrical roller bearing, accurate finish for the tapered main spindle and appropriate fit between the bearing bore and the main spindle are very important to ensure high accuracy of the main spindle. **NTN** recommends that the customer use the **NTN** tapered shaft ring gauge, which that is finished to same accuracies as the bearing, so that the customer can achieve higher precision. **NTN** also offers a plug gauge so that the customer can check the accuracy of the ring gauge.

■ Taper gauge for precision roller bearings

Each **NTN** precision cylindrical roller bearing taper gauge consists of a female gauge and a male gauge (plug gauge) (see Fig. 6.29).

Using blue paste or an equivalent as well as a ring gauge, check the fit of the bearing bore with the main spindle taper. The correct fit between the main spindle and the bearing leads to higher accuracy of the main spindle. The plug gauge is intended to check the accuracy of the associated ring gauge. Use the plug gauge to verify the taper accuracies of the associated ring gauge (see Fig. 6.30).

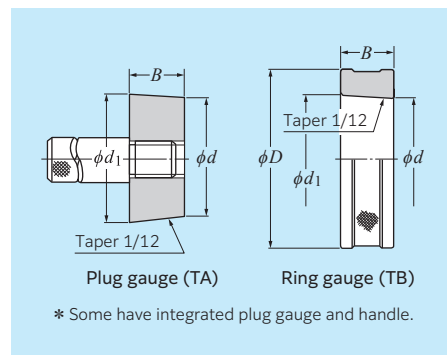


Fig. 6.29 Taper gauge




Fig. 6.30 Blue paste on taper gauge

■ Taper angle

NTN machines the tapered bore of its cylindrical roller bearings and the taper angle of its taper gauges according to the tolerances below:

- Nominal taper angle 1/12 ($4^{\circ} 46' 18.8''$)
- Tolerance for precision roller bearing with 1/12 taper angle is $+12'' \pm 12''$ (JIS Class 4 and 2)
- Targeted tolerance for taper gauge 1/12 is $+9''$.

Usually, Using blue paste between the tapered bore of a cylindrical roller bearing and a plug gauge exhibits a strong contact mark on the small diameter side as show in Fig. 6.31. This is because **NTN** has slightly adjusted the taper angle of the bearing bore to accommodate for the difference in thickness of the inner ring below each row of rollers.




Fig. 6.31

● Handling of Bearings

NTN

■ Checking main spindle taper with ring gauge

When checking the main spindle taper angle with a ring gauge, perform the following steps.

- Thoroughly clean the surface of the ring gauge, and apply a thin layer of blue paste to four equally-spaced points.
- Clean the tapered surface of the shaft, and gently insert into the ring gauge.
- The ring gauge to be lightly turning it.
- Check the patterns of blue paste deposited on the shaft surface.
- At this point, attach a strip of clear adhesive tape onto each blue paste spot, and peel off each strip.

Attach strips of adhesive tape onto white paper and check how much blue paste was deposited onto each point. Check that more than 80 % of the applied blue paste was deposited on the tapered surface.




Fig. 6.32 Application of blue paste to ring gauge

Table 6.7 Examples of blue paste records

Region A	Small	Large
Region B	Small	Large
Region C	Small	Large
Region D	Small	Large

Small: small diameter side
Large: large diameter side




Fig. 6.33 Regions subjected to measurement with blue paste

6.9 Handling precautions

Bearings are precision parts and in order to preserve their accuracy and reliability, care must be exercised in their handling. In particular, bearing cleanliness must be maintained, sharp impacts avoided, and rust prevented.

Bearings are vulnerable to impact. Do not hit them with a hammer directly or drop them on the floor (see Fig. 6.34).

In addition, bearings are sensitive to foreign particle contamination. When foreign particles enter the bearing during rotation, denting and/or scratches may occur, resulting in objectionable noise and vibration levels and rough bearing rotation (see Fig. 6.35). Therefore, when handling bearings, it is necessary to keep the periphery clean.

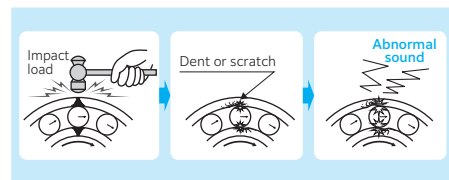


Fig. 6.34 Damage caused by impact

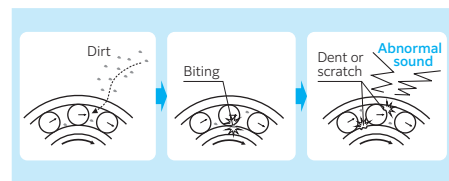


Fig. 6.35 Damage caused by foreign particle contamination

For optimal bearing performance, proper bearing handling methods must be used. The handling methods described herein are general guidelines. Depending on the type and size of bearing needed, special handling “methods” may be necessary. For more detailed information, please consult **NTN Engineering**.

Using proper protective equipment and tools

are also essential when installing or removing bearings, to avoid damage to the machinery and ensure the safety of the technician. Further information on proper installation and removal procedures is detailed in the following sections.

6.10 Bearing storage

Most rolling bearings are coated with a rust preventive oil before being packed and shipped. Please observe the following guidelines when storing bearings.

1. Ideally, bearings should be stored indoors at room temperature with a relative humidity of less than 60 %. Avoid places in direct sunlight or in contact with outer walls because excessive temperature fluctuation or humidity rise may cause condensation.
2. Bearings should not be stored directly on the ground. Instead, they should be placed on a shelf or pallet at least 20 cm above the ground. The maximum number of shipping boxes to be stacked for storage should be limited to four whenever possible (see Fig. 6.36).
3. Precision rolling bearings, large rolling bearings and thin ring or race rolling bearings must be laid down horizontally for storage (see Fig. 6.37). Storing them standing vertically may cause raceway deformation.

To avoid damage during transportation such as fretting or false brinelling, ensure that the individual bearing boxes are packed laying down horizontally within the shipping box. Fill remaining space with dunnage (see Fig. 6.38).

Some products have a ↑ symbol on the shipping box to prevent improper storage placement. Follow the indication on the box in this case (see Fig. 6.39).

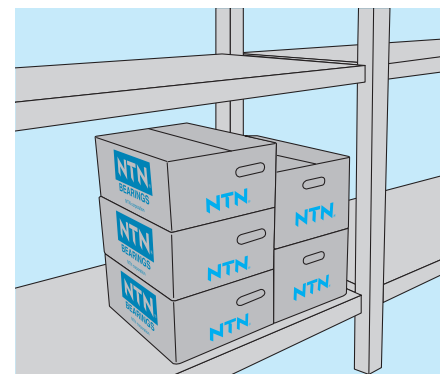


Fig. 6.36 Storing bearings on a shelf



Fig. 6.37 Storing one-bearing boxes on a shelf



Fig. 6.38 Transportation and storage by shipping box

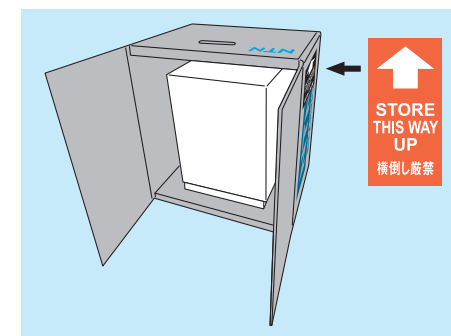


Fig. 6.39 Horizontally placing box prohibited

6.11 Bearing installation

A jig, a measuring instrument, a lubricant, and a clean and dry workshop will be needed for bearing installation. Further, if possible, it is desirable to install miniature/small ball bearings and precision rolling bearings in a clean room because intrusion of dirt and foreign matter significantly affects bearing performance.

Improper installation of bearings may cause marks from the rolling elements on the raceways, adversely affecting the bearing life. For details, on machining accuracy and mounting accuracy of bearings, shafts, and housings, for details please refer to the see technical data "2. Bearing selection and shaft & housing design."

■ Installation preparations

● Fitting surface of shafts and housings

When a bearing is installed on a shaft or in a housing with surfaces containing burrs or dents, the bearing may not seat properly, causing vibration and noise during operation (see Fig. 6.40 and Fig. 6.41).

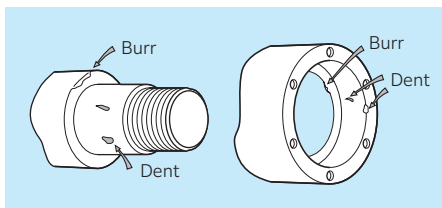


Fig. 6.40 Burrs and dents

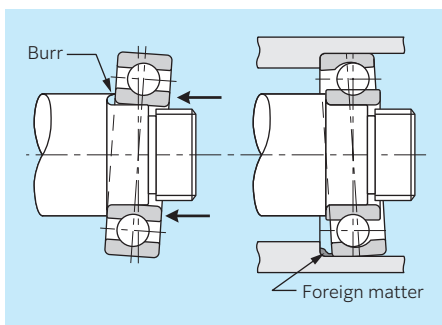


Fig. 6.41 Example of improper bearing installation

6.12 Running-in operation for main spindle bearings

Run-in is important for ensuring smooth operation of grease-lubricated main spindle bearings.

The following two modes of running-in are recommended:

- (1) The bearing speed is gradually increased in steps. After the temperature is saturated at each speed setting, the speed is increased to the next step (see Fig. 6.42).
- (2) The bearing is run for one minute at around the maximum operating speed of the spindle. This cycle is repeated two or three times (see Fig. 6.43) as needed.

(1) is the ordinary method used, however it takes slightly longer to reach the maximum operating speed of the spindle. In contrast, (2) can shorten the running-in time, however higher risk of sudden bearing temperature rise is considerable, so that running speed and its holding time must be set carefully.

Generally, the temperature of a main spindle bearing is measured on the front cover. The temperature difference across the bearing outer ring and front cover reaches 2 to 3 °C, and at the same time, the temperature difference between the hottest rolling element and the inner ring raceway surface seems to reach 5 to 10 °C. For this reason, **NTN** recommends that the machine is stopped if the temperature on front cover reaches approximately 60 °C. It is recommended that the temperature falls to 30 °C or less before restarting the running-in operation.

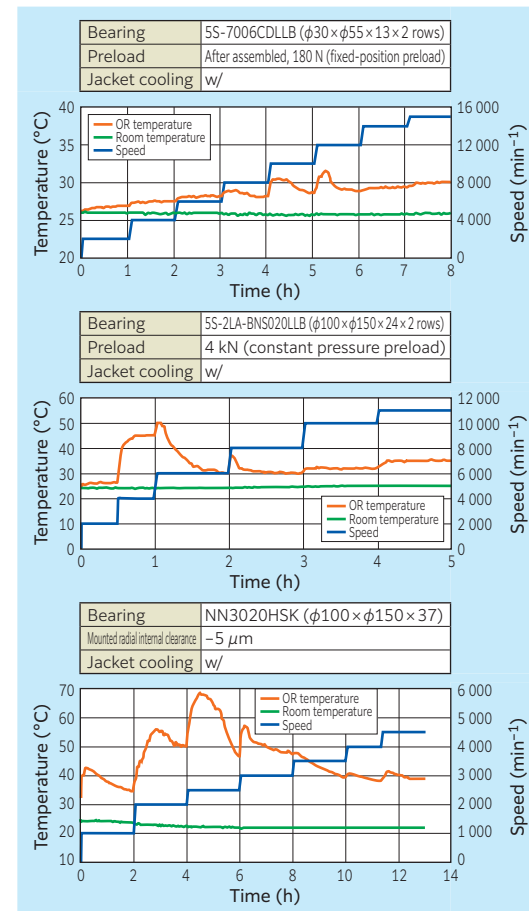


Fig. 6.42

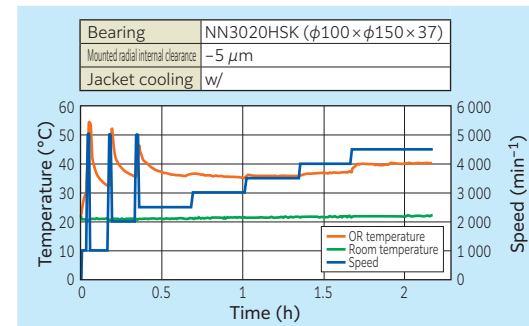


Fig. 6.43

7. Lubrication of Bearings

The purpose of rolling bearing lubrication is to prevent direct metallic contact between the various rolling and sliding elements. This is accomplished through the formation of a thin oil (or grease) film on the contact surfaces. Lubricant is necessary for operating rolling bearings. For rolling bearings, lubrication has the following advantages:

- (1) **Reduction of friction and wear**
It prevents direct metallic contact between the rolling and sliding elements of bearing components and reduces friction and wear.
- (2) **Prolonged bearing life**
The rolling fatigue life is prolonged by forming an oil film on the rolling contact surface part.
- (3) **Friction heat dissipation and cooling**
Circulating lubrication can dissipate heat generated from friction or conducted from the outside.
- (4) **Others**
It prevents foreign materials from entering inside the bearing and suppresses corrosion (rust) by covering the bearing surface with oil.

In order to exhibit these effects, a lubrication method that matches service conditions is required. In addition to this, a quality lubricant must be selected, the proper amount of lubricant must be used and the bearing must be designed to prevent foreign matter from getting in or lubricant from leaking out.

The main spindle of a machine tool usually uses an extremely low volume of lubricant so heat generation from stirring of the lubricant is minimal.

Fig. 7.1 summarizes the relationships between oil volume, friction loss, and bearing temperature.

The lubrication methods available for bearings in a machine tool include grease lubrication, oil mist lubrication, air-oil lubrication, and jet lubrication. Each method has unique advantages. Therefore, the lubricating system that best suits the lubrication requirements should be used.

Table 7.1 and **Table 7.2** summarize the features of various lubrication methods.

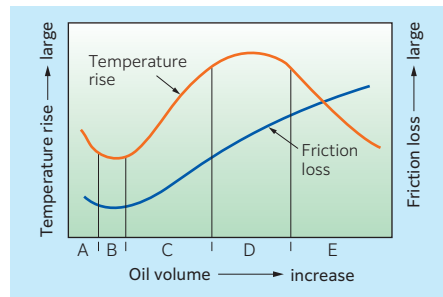


Fig. 7.1

Table 7.1 Oil volume, friction loss and bearing temperature (see Fig. 7.1)

Range	Characteristics	Lubrication method
A	When oil volume is extremely low, direct metallic contact occurs in places between the rolling elements and raceway surfaces. Bearing abrasion and seizing may occur.	—
B	A thin oil film develops over all surfaces, friction is minimal and bearing temperature is low.	Grease lubrication Oil mist lubrication Air-oil lubrication
C	As oil volume increases, heat buildup is balanced by cooling.	Circulating lubrication
D	Regardless of oil volume, temperature rises at a fixed rate.	Circulating lubrication
E	As oil volume increases, cooling dominates and bearing temperature decreases.	Forced circulating lubrication Jet lubrication

Table 7.2 Evaluation of various lubricating systems

Lubrication method	Grease lubrication	Oil mist lubrication	Air-oil lubrication	Jet lubrication
Criterion				
Handling	◎	○	○	△
Reliability	○	△	○	◎
Temperature rise	△	△	○	◎
Cooling effect	×	△	○	◎
Sealing structure	△	○	○	×
Power loss	○	○	○	×
Environmental contamination	○	×	△	○
Allowable d_{mn} value ¹⁾	1.4×10^6	2.2×10^6	2.5×10^6	4.0×10^6

Legend ◎ : Excellent ○ : Good △ : Fair × : Poor

1) The permissible d_{mn} values are approximate values:
 d_{mn} : pitch circle diameter across rolling elements (mm)
multiplied by speed (min^{-1})

7.1 Grease lubrication

Grease is popular amongst other lubricants because of its simpler maintenance. With an adequate amount of quality grease prefilled, this system can be used over a wide range of speed. The allowable maximum speed varies with the type and size of bearing: for a high speed angular contact ball bearing, the d_{mn} value should be 1.4×10^6 as a guideline. For applications exceeding this range, consult **NTN Engineering**.

■ Grease types

When grease temperature rises during high speed operation, which can be seen for machine tool spindles, a grease with a consistency of NLGI2 or NLGI3 is recommended. For the base oil, ester oil and synthetic oil are used in addition to mineral oil. Urea, which has excellent high temperature properties, is used as a thickener in addition to lithium soap and barium complex soap.

Table 7.3 lists technical data for greases commonly used for machine tool main spindles.

■ Amount of grease required

Usually, a bearing for the main spindle of a machine tool requires that grease volume be low so heat generated by the stirring of the grease during high speed operation is minimal. A guideline for the amount of grease used for a main spindle bearing is given below.

- Angular contact ball bearing;
15 to 20 % of bearing free space
- Cylindrical roller bearing;
10 to 15 % of bearing free space
- Tapered roller bearing;
15 to 20 % of bearing free space

The above is a guideline to determine the amount of grease required based on bearing free space listed in the bearing dimensions table. It is recommended to aim for the lower limit to reduce the running-in operation time.

Before filling a bearing with grease, remove the rustproof coating from the bearing with clean wash oil and allow the bearing to dry completely. Then fill and uniformly distribute an appropriate amount of grease in the bearing with an syringe, plastic bag, etc.

Table 7.3 Typical greases for machine tool main spindle bearings

Grease brand	SE-1	MP-1	ISO FLEX NBU 15	STABURAGS NBU 8 EP	Multemp LRL No.3	Multemp PS No.2
Thickener	Urea		Ba complex soap		Li soap	
Base oil	PAO + ester	Synthetic oil	Diester + mineral oil	Mineral oil	Ester	Ester + PAO
Base oil viscosity (40 °C) mm ² /s	22	40.6	23	105	37.3	15.9
Blend consistency NLGI No.	2	3	2	2	3	2
Dropping point °C	> 220	> 250	> 220	> 220	208	190
Operating temperature range °C	−50 to 120	−40 to 150	−40 to 130	−20 to 140	−40 to 150	−50 to 130
Application	Applied to ULTAGE™ series grease-lubricated sealed angular contact ball bearings	Applied to ULTAGE™ series grease-lubricated sealed angular contact ball bearings	Most commonly used for main spindles	Suitable for roller bearings subject to large loads	Wider operating temperature range	For low temperature and low torque
NTN grease code	L749	L448	15K	L135	12K	1K

Note: 1. Representative values are shown for the base oil viscosity, consistency, and dropping point.

2. The upper and lower limits of the operating temperature range differ depending on the usage environment and requirement specifications. Please consult with **NTN Engineering**.

7.2 Air-oil lubrication

Air-oil lubrication (also known as oil-air lubrication or oil and air lubrication) is widely adopted for main spindle bearings in order to cope with the higher speed and precision of machine tools and to ensure more reliable lubrication.

Air-oil lubrication employs a method by which compressed air is used to provide lubricating oil in precisely controlled amounts. Generally, an air-oil lubrication unit a volumetric piston-type distributor that accurately meters the required minimum amount of lubricating oil and provides it at optimal intervals controlled by a timer.

■ Features of air-oil lubrication

Air-oil lubrication has the following features over:

- Accurately supplies a minimal amount of oil.
- Can be adjusted to provide the proper amount of lubricant for individual bearings.
- It is easy to control the amount of oil depending on the viscosity of the lubricant.
- Compressed air helps cool the bearing.
- It reduces the amount of oil mist.
- Low oil consumption.
- Use of compressed air can prevent contamination of the bearing by other coolants.

■ Example of an air-oil lubrication system

Fig. 7.2 shows the configuration and example of an air-oil lubrication system.

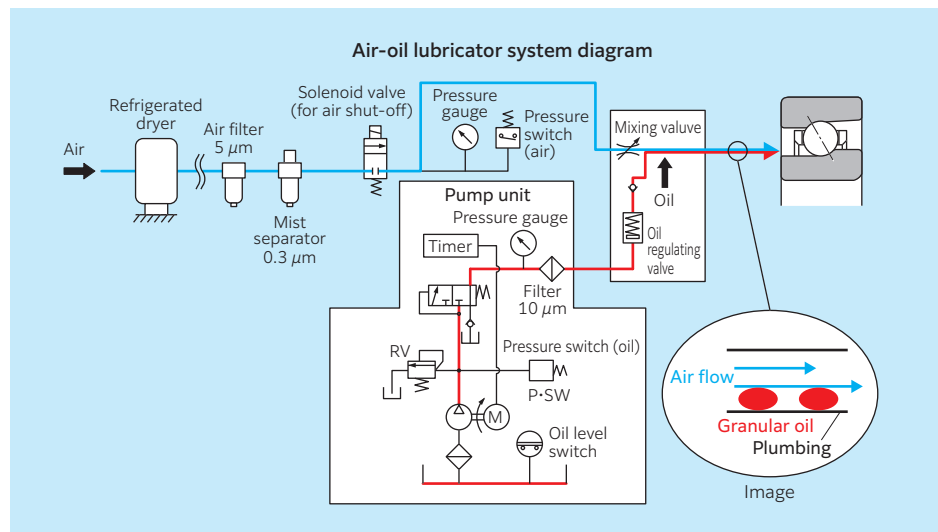


Fig. 7.2 Example of air-oil lubricating system

■ Air-oil lubrication nozzle spacer

Air-oil lubrication requires a specialized nozzle because it supplies the lubricating oil to the inside of the bearing by means of compressed air (see Fig. 7.3).

A nozzle with a hole diameter of 1.0 to 1.5 mm and a length 3 to 6 times the hole diameter is recommended.

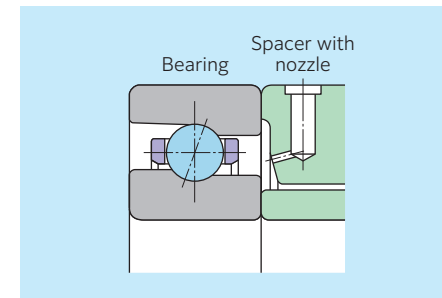


Fig. 7.3 Feed system for air-oil lubrication

■ Exhaust method for air-oil lubrication

Air-oil lubrication uses a large volume of air to feed lubricating oil to the bearing. Therefore, it is essential that the air fed into the bearing be allowed to escape. If the air is not smoothly exhausted, the lubricating oil will remain in the bearing and possibly contribute to bearing seizure. In the design stage, remember to allow ample space on the exhaust side of the bearing in order to increase exhaust efficiency and provide a larger oil drain hole to ensure smooth airflow. In addition, for types that allow for repositioning of the spindle, it is recommended that the shoulder dimensions of all parts is designed to prevent lubricating oil from flowing back into the bearing after a change in the attitude of the main spindle. Unnecessary dimensional differences can also contribute to stagnancy of the lubricating oil.

■ Recommended targeted position with nozzle

(1) Angular contact ball bearings

Table 7.4 Air-oil/oil mist nozzle spacer dimensions Unit: mm

Bearing No.	θ	A	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
7900U	15°	14.6	12.4	13.4	18.5	1
7901U	15°	16.6	14.4	15.4	20.5	1
7902U	15°	19.5	17.2	18.2	25	1
7903U	15°	21.5	19.2	20.2	27	1
7904U	15°	26.3	24	25	32.5	1
7905U	15°	31.3	29	30	37.5	1
7906U	15°	36.3	34	35	42.5	1
7907U	15°	41.5	39.2	40.2	50.5	1
7908U	15°	48.1	45.8	46.8	56.5	1
7909U	15°	52.8	50.5	51.5	63	1
7910U	15°	57.3	54.3	55.8	67.5	1.5
7911U	15°	64.1	61.1	62.6	73.5	1.5
7912U	15°	69.1	66.1	67.6	78.5	1.5
7913U	15°	74.1	71.1	72.6	84	1.5
7914U	15°	80.9	77.9	79.4	93	1.5
7915U	15°	85.9	82.9	84.4	97.5	1.5
7916U	15°	91.4	88.4	89.9	103	1.5
7917U	15°	97.4	94.4	95.9	112	1.5
7918U	15°	102.4	99.4	100.9	117	1.5
7919U	15°	107.4	104.4	105.9	122	1.5
7920U	15°	113.9	110	112	131	1.5
7921U	15°	118.9	115	117	136	1.5
7922U	15°	123.9	120	122	141	1.5
7924U	15°	135.4	132	134	155	1.5
7926U	15°	146.9	143	145	169	1.5
7000U	15°	15.4	13.1	14.1	22	1
7001U	15°	18.1	15.8	16.8	24.5	1
7002U	15°	21.3	19	20	27.5	1
7003U	15°	23.3	21	22	31	1
7004U	15°	28.6	25.8	26.8	37.5	1
7005U	15°	33.1	30.5	31.5	41.5	1
7006U	15°	39.6	36.5	37.5	49.5	1
7007U	15°	44.6	41	42	56	1
7008U	15°	50.4	47	48	61.5	1
7009U	15°	55.9	52	54	67.5	1
7010U	15°	60.9	57	59	72.5	1.5
7011U	15°	67.4	63	65	82	1.5
7012U	15°	72.4	68	70	87	1.5
7013U	15°	77.4	73	75	92	1.5
7014U	15°	83.9	78	80	101	1.5
7015U	15°	88.9	83	85	106	1.5
7016U	15°	95.4	90	92	115	1.5
7017U	15°	100.4	95	97	120	1.5
7018U	15°	106.9	101	103	129	1.5
7019U	15°	111.9	106	108	134	1.5
7020U	15°	116.9	112	114	139	1.5
7021U	15°	123.4	117	120	148	1.5
7022U	15°	129.9	122	125	157	1.5
7024U	15°	139.9	133	136	167	1.5
7026U	15°	153.9	143	146	184	1.5

Note) Spacer dimensions are the same for all contact angles (15°, 25° and 30°).

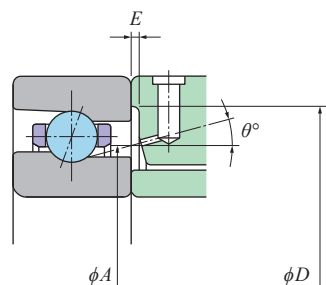


Fig. 7.4 79U, 70U and HSE types

Table 7.5 Air-oil/oil mist nozzle spacer dimensions Unit: mm

Bearing No.	θ	A	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
HSE910U	15°	58.9	55	56	67	1.5
HSE911U	15°	64.8	61	62	74	1.5
HSE912U	15°	69.8	66	67	79	1.5
HSE913U	15°	74.8	71	72	84	1.5
HSE914U	15°	81.6	77	79	93	1.5
HSE915U	15°	86.6	82	84	98	1.5
HSE916U	15°	91.6	87	89	103	1.5
HSE917U	15°	98.1	93	95	112	1.5
HSE918U	15°	103.1	98	100	117	1.5
HSE919U	15°	108.1	103	105	122	1.5
HSE920U	15°	115.3	109	111	131	1.5
HSE921U	15°	120.3	114	116	136	1.5
HSE922U	15°	125.3	119	121	141	1.5
HSE924U	15°	136.9	130	132	155	1.5
HSE926U	15°	148.4	141	143	169	1.5
HSE928U	15°	158.4	151	153	179	1.5
HSE930U	15°	172.1	164	166	196	1.5
HSE932U	15°	182.1	174	176	206	1.5
HSE934U	15°	192.1	184	186	216	1.5
HSE010	15°	61.6	57	59	73	1.5
HSE011	15°	69.7	63	65	82	1.5
HSE012	15°	74.7	68	70	87	1.5
HSE013	15°	79.7	73	75	92	1.5
HSE014	15°	86.9	78	80	101	1.5
HSE015	15°	91.9	83	85	106	1.5
HSE016	15°	99.2	90	92	115	1.5
HSE017	15°	104.2	95	97	120	1.5
HSE018	15°	111.4	101	103	129	1.5
HSE019	15°	116.4	106	108	134	1.5
HSE020	15°	121.4	112	114	138	1.5
HSE021	15°	128.7	117	119	148	1.5
HSE022	15°	135.2	122	126	158	1.5
HSE024	15°	145.2	133	136	167	1.5
HSE026	15°	158.5	143	149	187	1.5
HSE028	15°	170.8	153	160	197	1.5
HSE030	15°	181.5	165	171	210	1.5
HSE032	15°	193.2	175	183	225	1.5
HSE034	15°	207.8	185	197	245	1.5

Note) Spacer dimensions are the same for all contact angles (15°, 20° and 25°).

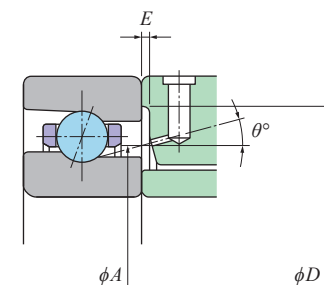


Fig. 7.5 BNT and HTA U types

Table 7.6 Air-oil/oil mist nozzle spacer dimensions Unit: mm

Bearing No.	θ	A	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
BNT900	12°	14.3	12.2	13.2	18.5	1
BNT901	12°	16.3	14.2	15.2	20.5	1
BNT902	12°	19.2	17.1	18.1	24	1
BNT903	12°	21.2	19.1	20.1	26	1
BNT904	12°	26	23.5	24.5	32.5	1
BNT905	12°	31	28.5	29.5	37.5	1
BNT906	12°	35.8	33.5	34.5	42.5	1
BNT907	12°	41.1	38.5	39.5	50	1
BNT908	12°	47.1	44.4	45.4	56	1
BNT909	12°	52.3	49	50	61.5	1
BNT000	15°	15.1	13	14	22	1
BNT001	15°	17.7	15.6	16.6	24	1
BNT002	15°	21	18.6	19.6	28	1
BNT003	15°	22.9	20.6	21.6	30	1
BNT004	15°	28.1	25	26	37	1
BNT005	15°	32.6	30.5	31.5	41.5	1
BNT006	15°	39.1	35.5	36.5	49.5	1
BNT007	15°	44	41	42	56	1
BNT008	15°	49.8	47	48	61	1
BNT009	15°	55.2	52	53	68	1
BNT200	15°	17.5	15.4	16.4	24.5	1
BNT201	15°	18.9	16.8	17.8	26.5	1
BNT202	15°	21.4	19.3	20.3	29	1
BNT203	15°	24.6	22	23	34	1
BNT204	15°	30	26.5	27.5	40.5	1
BNT205	15°	34.8	32	33	45.5	1
BNT206	15°	40.9	37.5	38.5	54.5	1
BNT207	15°	46.6	43.5	44.5	64	1
BNT208	15°	52.5	49	50	71.5	1
BNT209	15°	56.9	54.5	55.5	76.5	1

Table 7.7 Air-oil/oil mist nozzle spacer dimensions Unit: mm

Bearing No.	θ	A	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
HTA920U	15°	116.4	110	112	130	1.5
HTA921U	15°	121.4	115	117	135	1.5
HTA922U	15°	126.4	120	122	140	1.5
HTA924U	15°	138.7	132	134	153	1.5
HTA926U	15°	151	143	145	167	1.5
HTA928U	15°	161	153	155	177	1.5
HTA930U	15°	174.9	165	167	195	1.5
HTA932U	15°	184.9	175	177	205	1.5
HTA934U	15°	194.9	185	187	215	1.5
HTA936U	15°	208.1	197	199	233	1.5
HTA938U	15°	218.1	208	210	242	1.5
HTA940U	15°	232.5	220	222	260	1.5
HTA006U	15°	39.5	35.5	36.5	49.5	1
HTA007U	15°	44.3	41	42	56	1
HTA008U	15°	49.9	47	48	61	1
HTA009U	15°	56.1	52	53	68	1
HTA010U	15°	61.1	57	59	73	1.5
HTA011U	15°	69.3	63	65	82	1.5
HTA012U	15°	74.3	68	70	87	1.5
HTA013U	15°	79.3	73	75	92	1.5
HTA014U	15°	86.4	78	80	101	1.5
HTA015U	15°	91.4	83	85	106	1.5
HTA016U	15°	98.7	90	92	115	1.5
HTA017U	15°	103.7	95	97	120	1.5
HTA018U	15°	111	101	103	129	1.5
HTA019U	15°	116	106	108	134	1.5
HTA020U	15°	121	112	114	138	1.5
HTA021U	15°	128.4	117	119	148	1.5
HTA022U	15°	134.9	122	126	158	1.5
HTA024U	15°	144.9	133	136	167	1.5
HTA026U	15°	158.1	143	149	187	1.5
HTA028U	15°	170.4	153	160	197	1.5
HTA030U	15°	181.2	165	171	210	1.5
HTA032U	15°	192.7	175	183	225	1.5
HTA034U	15°	207.4	185	197	245	1.5

Note) Spacer dimensions are the same for all contact angles (30° and 40°).

When lubricant is supplied between the cage and outer ring




Fig. 7.6 78C and 79C types


Table 7.8 Air-oil/oil mist nozzle spacer dimensions

Unit: mm

Bearing No.	When lubricant is supplied between the cage and outer ring					
	B	C	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
7805C	32.6	33.3	28	29	34	1
7806C	37.6	38.2	33	34	39	1
7807C	42.6	43.1	38	39	44	1
7808C	47.8	48.4	43	44	49	1
7809C	53.2	54.3	48.5	49.5	54	1
7810C	59.5	60.2	54	55	60.5	1
7811C	66.2	67.4	59	61	68	1
7812C	71.7	72.8	64.5	66.5	73.5	1
7813C	77.7	78.7	70.5	72.5	79.5	1
7814C	82.4	83.6	75.5	77.5	84.5	1
7815C	87.8	88.8	80.5	82.5	89.5	1
7816C	92.5	93.6	85.5	87.5	94.5	1
7817C	101	102.5	91.5	93.5	103.5	1
7818C	106	107.3	96.5	98.5	108.5	1
7819C	111	112.4	101.5	104	113.5	1
7820C	115.6	117	106.5	110	118.5	1
7821C	120.7	122	111.5	115	123.5	1
7822C	129.2	131.1	117.5	122	132.5	1
7824C	139.2	141.1	127.5	132	142.5	1
7826CT1	152.3	154.5	139	144	156.5	1.5
7828CT1	162.3	164.5	149	155	166.5	1.5
7830CT1	175.3	177.8	160.5	167.5	180.5	1.5
7832CT1	185.5	188	170.5	177.5	190.5	1.5
7834CT1	198.7	201.5	181	188	204.5	1.5
7928CT1B	171.3	176.9	153	163	179	1.5
7930CT1B	187.2	193.8	165	179	197	1.5
7932CT1B	198.3	201.9	175	190	205	1.5
7934CT1B	208.2	211.9	185	200	215	1.5

Note) 7805C to 7834CT1, 7928CT1B to 7934CT1B ... B is recommended.
If targeting at B is impossible, targeting of C is acceptable.

(a) When lubricant is supplied between the cage and inner ring



(b) When lubricant is supplied between the cage and outer ring

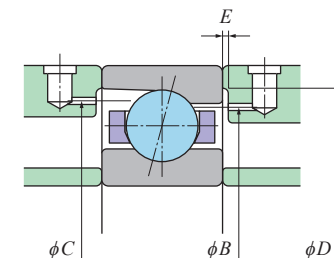


Fig. 7.7 70C and 72C types

Table 7.9 Air-oil/oil mist nozzle spacer dimensions

Unit: mm

Bearing No.	(a) When lubricant is supplied between the cage and inner ring			(b) When lubricant is supplied between the cage and outer ring				Common to (a) & (b)	
	A	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	B	C	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
7200C	—	—	—	23	23.8	15.5	17.5	25	1
7201C	—	—	—	24.9	25.8	17.5	19.5	27	1
7202C	—	—	—	28.3	29.4	20.5	22.5	30	1
7203C	—	—	—	32.4	33.7	23.5	26.5	35	1
7204C	—	—	—	38.4	40.2	26.5	31	41.5	1
7205C	—	—	—	43.3	44.7	32	36	46.5	1
7206C	—	—	—	51.1	53	37.5	44	54.5	1
7207C	—	—	—	59.1	61.2	43.5	52	64	1
7208C	—	—	—	65.9	68.3	49	58	71.5	1
7209C	—	—	—	71.3	73.8	54.5	63	76.5	1
7210C	—	—	—	76.4	78.8	59.5	68	81	1.5
7211C	—	—	—	84.6	87.4	66	76	90	1.5
7212C	—	—	—	94.4	97.5	72	85	99.5	1.5
7213C	—	—	—	100.8	104.1	77.5	92	108.5	1.5
7214C	—	—	—	106.2	109.6	83	96	114	1.5
7215C	—	—	—	112.2	115.6	88.5	102	118	1.5
7216C	—	—	—	119.5	123.2	94	109	127	1.5
7217C	—	—	—	128	131.8	100	117	136	1.5
7218C	—	—	—	136.2	140.4	106	125	146	1.5
7219C	119.4	111.5	113.5	144.4	149	111.5	132	155	1.5
7220C	126.1	117.5	120	152.7	157.7	117.5	141	164	1.5
7221C	131.6	122.5	125	159.9	165.1	122.5	148	173.5	1.5
7222C	138.3	129	131	168.5	174.1	129	157	182	1.5
7224C	149.3	141	143	181.5	187.2	141	169	196	1.5
7226C	161.3	152.5	155	193	199.2	152.5	181	210	1.5
7028CT1B	162.9	153	157	183.5	187.4	153	172	197	1.5
7030CT1B	174.4	165	169	196.6	200.9	165	185	210	1.5
7032CT1B	185.7	175	180	209.8	214.2	175	198	225	1.5
7034CT1B	199.2	185	193	226	231.3	185	214	245	1.5
7036CT1B	212.2	197	206	242	248	197	230	263	1.5
7038CT1B	222.2	210	216	252	258	210	240	270	1.5
7040CT1B	235.2	220	229	268	275	220	255	290	1.5

Note) 7200C to 7218C ... B is recommended.
7219C to 7226C, 7028CT1B to 7040CT1B ... A is recommended.
If targeting at A is impossible, targeting at B is acceptable. If both A and B are impossible, targeting of C is acceptable.

(2) Cylindrical roller bearings

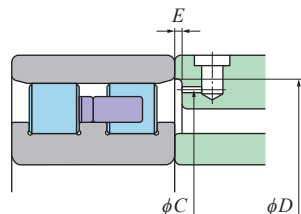


Fig. 7.8 NN30 and NN30T6 types

Table 7.10 Unit: mm

Bearing No.	C	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
NN3005	40.3	31	33.8	42	1
NN3006	47	38	40.5	50	1
NN3007	53.5	43	47.0	57	1
NN3008	59.5	48	53.0	63	1
NN3009	66	54	59.5	69	1
NN3010	71	59	64.5	74	1.5
NN3011	79	65	72.5	83	1.5
NN3012	84	70	77.5	88	1.5
NN3013	90 (89)	75	82.5	93	1.5
NN3014	98	82	90	102	1.5
NN3015	103	87	95	107	1.5
NN3016	111	93	103	115	1.5
NN3017	116	98	108	120	1.5
NN3018	125	105	117	130	1.5
NN3019	130	110	122	135	1.5
NN3020	135	115	127	140	1.5
NN3021	144 (143)	120	135	149	1.5
NN3022	153 (152)	127	144	158	1.5
NN3024	163 (162)	137	154	168	1.5
NN3026	179	150	171	185	1.5
NN3028	189	160	181	195	1.5
NN3030	202	172	194	210	1.5
NN3032	215.5	183	208	223	1.5
NN3034	232	196	224	240	1.5
NN3036	251	209	243	259	1.5
NN3038	261	219	253	269	1.5

NOTE) With certain products, the dimension C of L1 cage differs from that of T6 cage. The values in parentheses () are dimensions C of L1 cages. Other dimensions of L1 cages are same as those of T6 cages.

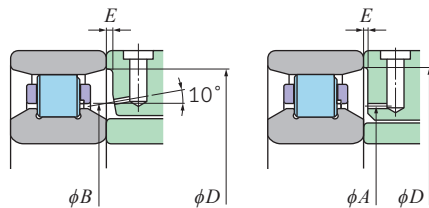


Fig. 7.9 N10HS types

Table 7.11 Unit: mm

Bearing No.	A	B	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
N1006HS	—	40.4	37	38	50	1
N1007HS	—	46.5	42	43	57	1
N1008HS	—	51.7	47	48	63	1
N1009HS	—	57.7	52	53	69	1
N1010HS	—	62.7	57	58	74	1.5
N1011HS	—	69.7	63.5	64.5	83	1.5
N1012HS	—	74.8	68.5	69.5	88	1.5
N1013HS	—	79.7	73.5	74.5	93	1.5
N1014HS	86	—	78.5	80.5	102	1.5
N1015HS	91	—	83.5	85.5	107	1.5
N1016HS	97.5	—	88.5	90.5	115	1.5
N1017HS	102.5	—	93.5	95.5	120	1.5
N1018HS	110	—	102	104	130	1.5
N1019HS	115	—	107	109	135	1.5
N1020HS	120	—	112	114	140	1.5
N1021HS	125.9	—	118	120	149	1.5
N1022HS	133.1	—	123	125	158	1.5
N1024HS	143.3	—	133	135	168	1.5
N1026HS	157.2	—	143	145	185	1.5
N1028HS	167.2	—	153	155	195	1.5
N1030HS	179.6	—	165	167	210	1.5
N1032HS	191.1	—	175	177	223	1.5




Fig. 7.10 N10HSR types

Table 7.12 Unit: mm

Bearing No.	A	Outside diameter of inner ring spacer	Bore diameter of outer ring spacer	D	E
N1009 HSRT6	58.3	52	53	69	1.0
N1011 HSRT6	71.5	63.5	64.5	83	1.5
N1012 HSRT6	76.6	68.5	69.5	88	1.5
N1013 HSRT6	81.5	73.5	74.5	93	1.5
N1014 HSRT6	89.7	78.5	80.5	102	1.5
N1016 HSRT6	101.3	88.5	90.5	115	1.5
N1018 HSRT6	113.8	102	104	130	1.5
N1020 HSRT6	123.8	112	114	140	1.5

7.3 Jet lubrication

With this lubricating system, a high speed jet of lubricant is injected into the bearing from the side. This is the most reliable lubricating technique and is typically used on the main spindle bearings of jet engines and gas turbines. It is currently capable of a d_{mn} value of up to approximately 4.0×10^6 .

When used as a lubricating system for the main spindle of a machine tool, it can minimize the temperature rise of the bearing.

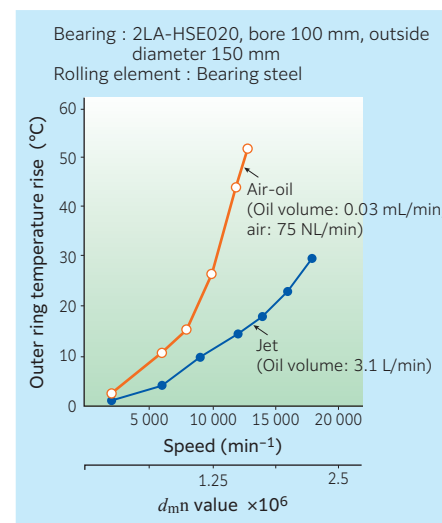


Fig. 7.11 Comparison of temperature rise of outer ring with air-oil lubrication and jet lubrication

(The temperature rise with air-oil lubrication is relative to room temperature; the temperature with jet lubrication is relative to lubricant temperature.)

However, the resultant torque loss is great, as a large amount of oil is supplied to each bearing. Therefore, this arrangement requires a powerful motor to drive the main spindle. Low viscosity oil (2 to $3 \text{ mm}^2/\text{s}$) is used.

Fig. 7.11 shows examples of the temperature rise with air-oil lubrication and jet lubrication, while Fig. 7.12 graphically plots test results of power loss.

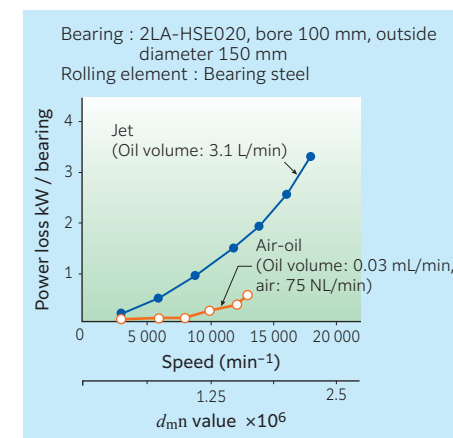



Fig. 7.12 Comparison of power loss with air-oil lubrication and with jet lubrication

8. Precision Bearing Technologies

8.1 ULTAGE™ series precision bearings for machine tool main spindles

NTN has responded to need for improved efficiency, reliability, quality and environmental responsibility for machine tools by developing the ULTAGE™ series of precision bearings. ULTAGE™ series of bearings demonstrates excellent performance thanks to the optimal internal design; a new approach to surface quality; and the use of special materials, special grease, and seals on both sides.

ULTAGE™ is the name for NTN's goal of achieving the ultimate performance with precision bearings, and expresses the "ULTIMATE" performance on any type of "STAGE."

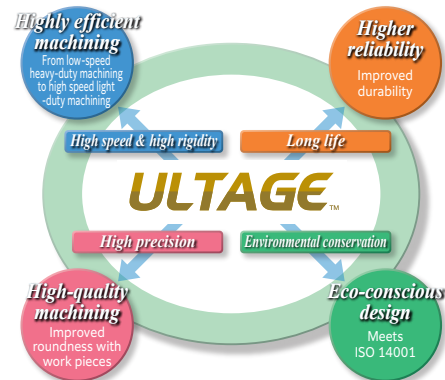

■ Concept

Our ideal is to offer a ultra high speed precision bearing that offers excellent reliability while remaining eco-friendly.

[Design]

The internal bearing design has been optimized to cope with varying applications and operating conditions in order to realize high speed and high rigidity, limited temperature rise, high precision, energy saving and low noise emission. It performs optimally in a variety of situations.

[Material]

Adoption of special material and a special surface modification technique has resulted in greatly enhanced reliability.

[Lubrication]

Use of unique eco-conscious technology and special grease contributes to decreased pollution and enhanced energy savings.

[Precision]

Our ultra high precision technology, in conjunction with our proven precision bearing technology, will help attain further improved precision.

8.2 Material and surface modification

The ULTAGE™ series high speed and ultra high speed precision bearings for machine tool main spindle employs a special material that boasts excellent anti-seizure properties and wear resistance, as well as a unique surface modification technique.

■ Life under normal temperatures

The test results obtained from point contact test pieces under greater loading are graphically plotted in Fig. 8.1.

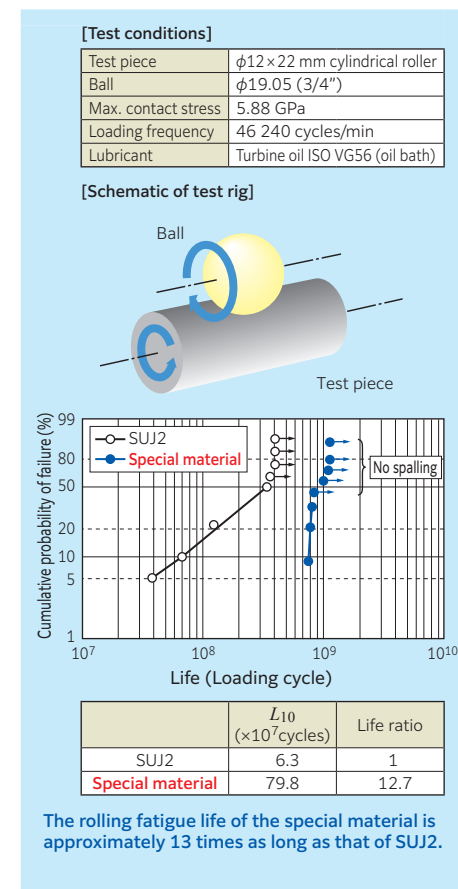


Fig. 8.1 Life test results with point contact test pieces

■ Life under high temperature

The test results obtained from thrust-type test pieces at 200 °C are graphically plotted in Fig. 8.2.

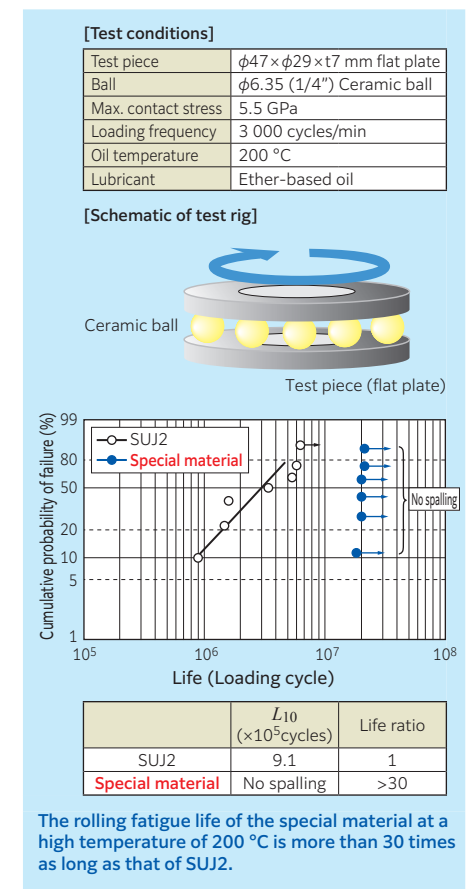


Fig. 8.2 High temperature life test results with thrust-type test pieces

Improved wear resistance

Test results with a Sawin type friction and wear test machine are illustrated in Fig. 8.3.

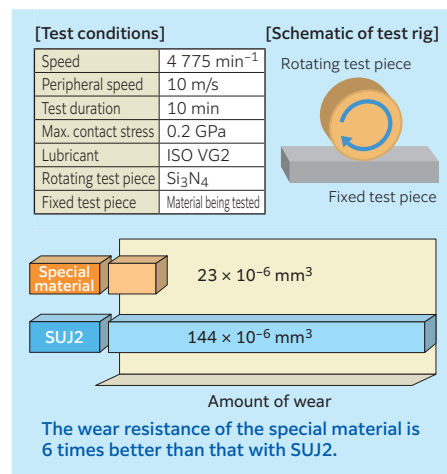


Fig. 8.3 Test results with Sawin type friction and wear test machine

Improved anti-seizure property

Test results with a two roller testing machine are illustrated in Fig. 8.4.

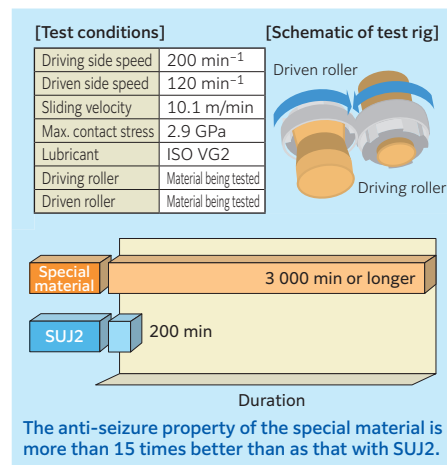


Fig. 8.4 Test results with a two roller testing machine

Adoption of ceramic balls

A comparison of temperature rise, which can vary depending on the material of rolling element, is illustrated in Fig. 8.5.


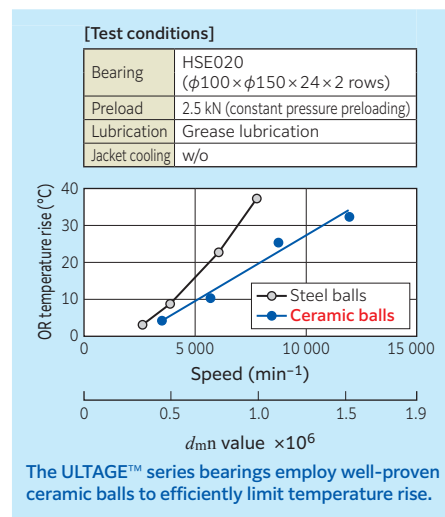


Fig. 8.5 Comparison of temperature rise with steel and ceramic rolling elements

8.3 Environmentally conscious technology

The eco-friendly ULTAGE™ series is available in two specifications: an eco-friendly air-oil lubrication design that offers energy savings by reducing air and oil consumptions; and a grease-lubricated, sealed design that reduces environmental impact by employing a grease lubrication system that is capable of higher-speed operation.


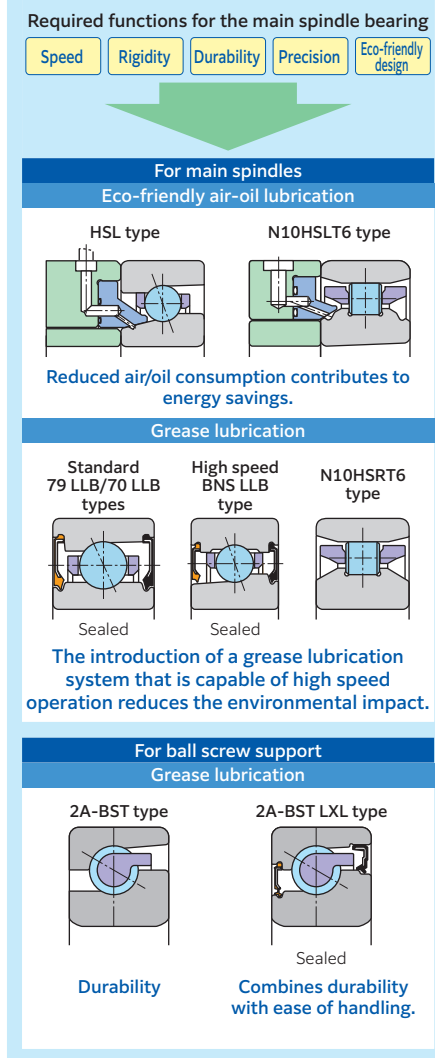


Grease-lubricated sealed angular contact ball bearings

(1) Ease of handling

ULTAGE™ series sealed angular contact ball bearings are grease-prefilled bearings. No grease filling is necessary; you need only wipe off the rust-preventive oil before assembly. Seals of different colors are employed to differentiate the front and back. The black front face and orange back face are easily identified, which also makes it easy to orient the bearings in combinations (see Table 8.1).

Table 8.1 Bearing combinations and seal colors

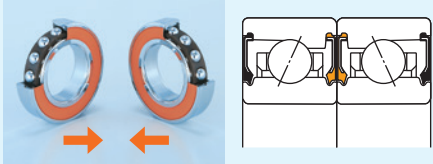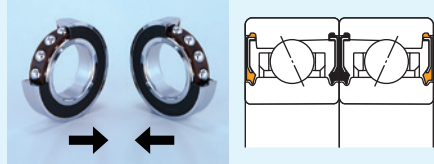DB set (back-to-back)	DF set (face-to-face)
Orange seal + Orange seal 	Black seal + Black seal 

(2) Suggestions for simplified spindle structure

The ULTAGE™ series sealed angular contact ball bearing makes possible high speed operation with grease lubrication thanks to optimized internal design. Grease lubrication with minimal mist splash simplifies main spindle structure and contributes to lower environmental impact as well as cost reduction (see Fig. 8.6).

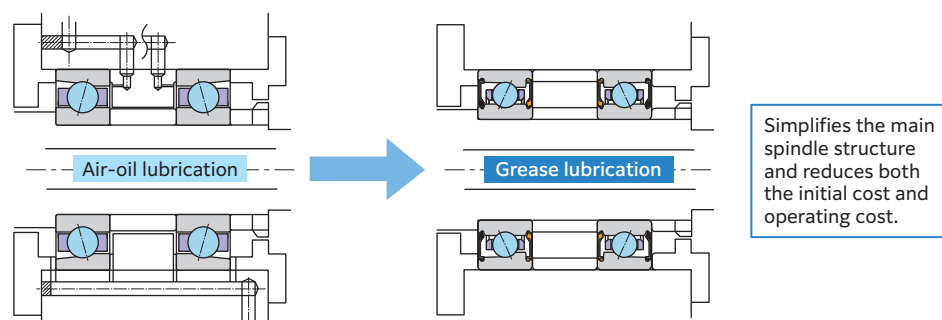


Fig. 8.6 Alteration to lubrication system (air-oil lubrication to grease lubrication)

Eco-friendly air-oil lubricated angular contact ball bearings and cylindrical roller bearings

When combined with the eco-friendly nozzle, the eco-friendly air-oil lubricated angular contact ball bearing (HSL/HSFL types) or cylindrical roller bearing [N10HSLT6 (K) type] can reduce the emissions of oil mist and noise.

(1) Reduction of oil mist





The eco-friendly air-oil lubricated bearing does not spray compressed air from the nozzle; instead, it uses the centrifugal force of the rotating inner ring to supply lubricating oil into the bearing. For this reason, this type of bearing conserves both air and oil. In addition, it reduces the amount of oil mist emitted from the labyrinth seal of the spindle. The Table 8.2 reveal the difference between the amount of oil mist emitted from the standard bearing and that emitted from the eco-friendly bearing.

The lubricating oil discharged with air passes through the inside of the bearing and is then exhausted as a large volume of mist.

The lubricating oil exhausted from the bearing in the mist state is collected through the discharge port of the main spindle housing, but some of the oil mist leaks from the main spindle labyrinth seal and contaminates the immediate environment around the machine.

Adoption of the eco-friendly bearing therefore improves the working environment.

Table 8.2 Comparison of oil mist emissions between standard bearing and eco-friendly bearing

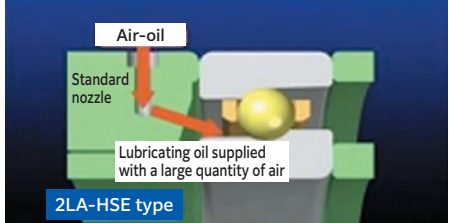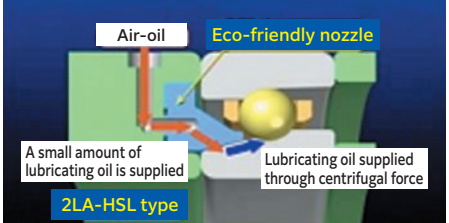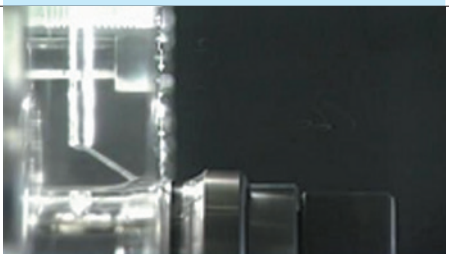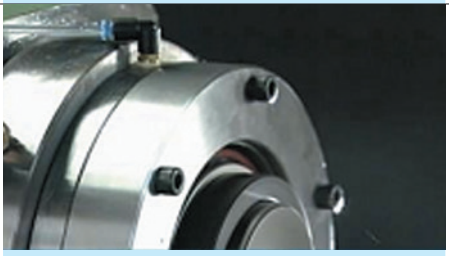Standard bearing	Eco-friendly bearing
 2LA-HSE type Standard bearings consume a great deal of air when supplying lubricating oil to the bearing.	 2LA-HSL type The eco-friendly type uses centrifugal force to supply lubricating oil into the bearing.
 Inner ring The oil emitted from the nozzle is in a mist state.	 The oil emitted from the nozzle is in a liquid state.
 A large amount of oil mist, contaminating the working environment.	 It reduces the amount of oil mist discharged and improves the working environment.

(2) Noise Reduction

The standard air-oil lubrication method uses air to supply a slight amount of oil. It also uses a special nozzle spacer, as shown in **Fig. 8.7** and **Fig. 8.9**.

In addition, this method uses a nozzle measuring 1 to 1.5 mm in diameter to supply oil to the raceway surface of the bearing at the rate of 30 to 40 NL/min/bearing. To supply this oil, the nozzle emits compressed air as a jet to break the air barrier of the bearing, which is created when running at high speed. In this way, the air is used as a tool for supplying oil. The eco-friendly bearing developed by **NTN** reduces the amount of air consumed, thus reducing the whistling noise of the flowing air. The mechanism used in this type of bearing is as follows: the centrifugal force of the bearing inner ring feeds a small amount of oil from the nozzle to the raceway surface of the bearing along the tapered surface (see **Fig. 8.8** and **Fig. 8.10**).

Since the function of the compressed air is only to deliver lubricating oil to the cavity of the inner ring, a large quantity of air is not required. In addition, since the air used to supply the oil is released between the tapered surfaces, the whistling noise of air is also reduced.

When the eco-friendly bearing is employed, the noise is reduced by 6 to 8 dBA.

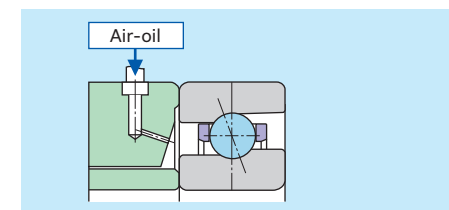


Fig. 8.7 Standard nozzle

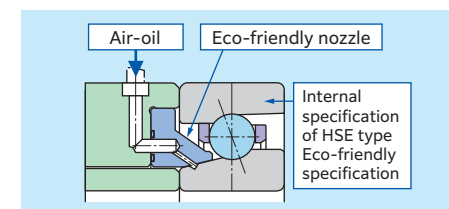


Fig. 8.8 Eco-friendly type nozzle

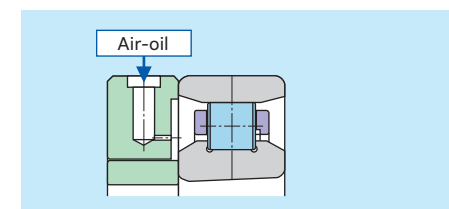


Fig. 8.9 N10HS type

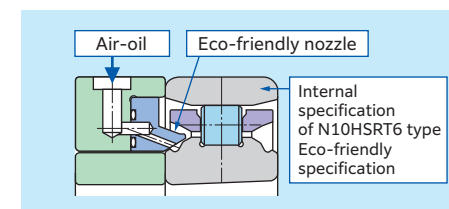


Fig. 8.10 N10HSLT6 type

Example:

In the high speed region in excess of $10\,000\text{ min}^{-1}$, noise is reduced by 6 to 8 dBA (see Fig. 8.11).

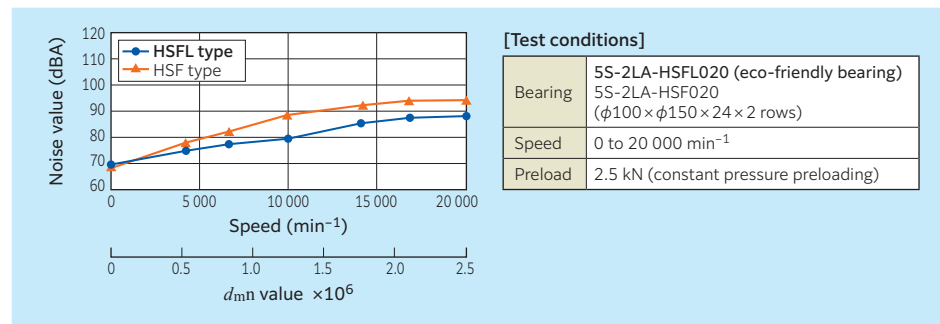


Fig. 8.11 Comparison of noise values

The eco-friendly bearing is particularly good for reducing “screeching” noise. The high-frequency component of the noise generated at high speeds is well attenuated. The reason for this is as follows: when the air jet emitted from the standard nozzle hits the rolling elements, a high-pitched noise is generated; in contrast, the eco-friendly nozzle does not emit air on the rolling elements, which reduces screeching noise (see Fig. 8.12 and Fig. 8.13).

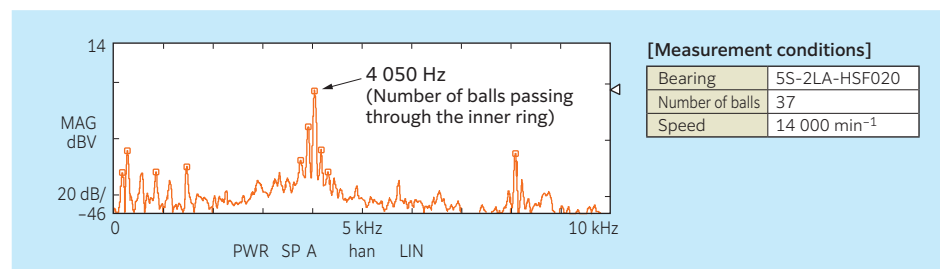


Fig. 8.12 Bearing noise frequency analysis results (Standard nozzle)

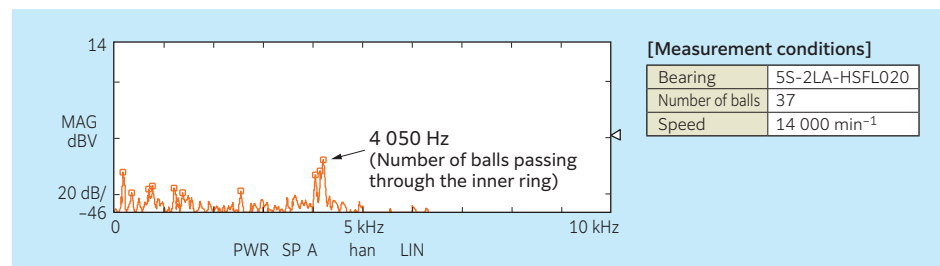


Fig. 8.13 Bearing noise frequency analysis results (Eco-friendly nozzle)



Main Spindle Bearings

9. Angular Contact Ball Bearings for Radial Loads CONTENTS

9.1	Types and features	86
9.2	Standard cage types	89
9.3	Bearing designations	90
9.4	Bearing accuracy	92
9.5	Internal clearance and standard preload of duplex angular contact ball bearings	94
9.6	Recommended fits for angular contact ball bearings	102
9.7	Duplex angular contact ball bearings	103
9.8	Duplex arrangement codes of duplex angular contact ball bearings	104
9.9	Flush ground and universal matching	104
9.10	Angular contact ball bearings with ceramic balls	106
9.11	Operating life of bearings with ceramic balls	107
9.12	Recommended lubrication specifications	108
9.13	Standard angular contact ball bearings 79U and 70U types	109
9.14	High speed angular contact ball bearings HSE type	110
9.15	Ultra high speed angular contact ball bearings HSF type	112
9.16	Eco-friendly air-oil lubricated angular contact ball bearings HSL type, HSFL type	113
9.17	Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring, HSEW type	116
9.18	Grease-lubricated sealed standard angular contact ball bearings 79 LLB/70 LLB types	119
9.19	Grease-lubricated sealed high speed angular contact ball bearings BNS LLB type	122
Dimension Tables		
	Standard angular contact ball bearings	126
	High speed angular contact ball bearings	154
	Ultra high speed angular contact ball bearings	178
	Eco-friendly high speed angular contact ball bearings	180
	Eco-friendly ultra high speed angular contact ball bearings	188
	Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring, HSEW type	190
	Grease-lubricated sealed standard angular contact ball bearings	198
	Grease-lubricated sealed high speed angular contact ball bearings	214
	Angular contact ball bearings for grinding machines / motors	238

9. Angular Contact Ball Bearings for Radial Loads

Angular contact ball bearings for radial loads used in machine tools are bearings which inner and outer rings cannot be separated. This series of bearing includes 78, 79U, 70U, 72, HSE9U, HSE0, BNS9, BNS0, BNT9, BNT0 and BNT2 types. For angular contact ball bearings, an imaginary straight line connecting the contact points between the balls and inner and outer rings forms an angle with the radial axis. The optimal contact angle can be selected to meet functional requirements such as high speed or high rigidity. The available contact angles are 15° (contact angle symbol "C"), 20° (no symbol), 25° ("AD"), and 30° (no symbol) (see Fig. 9.1).




Fig. 9.1 Contact angle

9.1 Types and features

Open bearings

■ Standard angular contact ball bearings (78, 79, 70 and 72 Types)

Standard angular contact ball bearings are available in four types: 78, 79, 70 and 72. Types 79 and 70 include the 79U and 70U ULTAGE™ series, which accommodate high speed and low temperature rise with optimized specifications of the internal design. For these types, three contact angles are available: 15° (contact angle symbol "C"), 25° ("AD"), and 30° (no symbol). The contact angle of 25°, however, is also available with 79U and 70U types. This bearing series has an accuracy of JIS Class 5 or better. The features include high speed, high rigidity, and high load capacity. Some models incorporate ceramic balls.

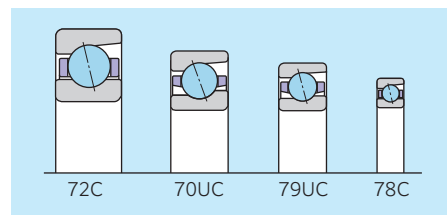


Fig. 9.2 Standard angular contact ball bearings

■ High speed angular contact ball bearings (HSE type)

High speed angular contact bearings are available in two types: HSE9U and HSE0. The boundary dimensions of this bearing series are determined according to the JIS dimension series (9, 0), and three types of contact angles are available: 15° (contact angle symbol "C"), 20° (no symbol), and 25° ("D"). The accuracy of this ball bearing series is JIS Class 5 or better, and the ball diameter is smaller than that of the standard angular contact ball bearing in order to accommodate high speeds. The outer surface of the inner ring and the bore of the outer ring are relieved on one side, and this bearing series employs an air-oil lubrication system to ensure smooth oil flow. In addition, it employs special materials, and its surface is modified to protect the bearing from wear and seizure more positively. The HSE type bearing is available with either steel balls or ceramic balls.

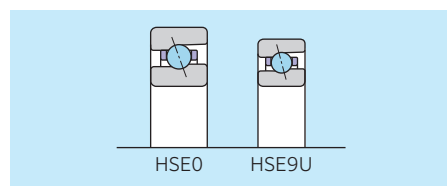


Fig. 9.3 High speed angular contact ball bearings

■ Ultra high speed angular contact ball bearings with ceramic balls (HSF type)

The HSF0 type ultra high speed angular contact ceramic ball bearing employs smaller balls than the HSE0C type to ensure rigidity and prevent temperature rise. In addition, it employs a contact angle of 25° to accommodate the reduction in contact angle caused by centrifugal force during operation.

These characteristics with air-oil lubrication support bearings with a d_{mn} value $\leq 2.6 \times 10^6$.

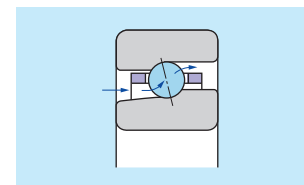


Fig. 9.4 Ultra high speed angular contact ball bearings

■ Eco-friendly air-oil lubricated angular contact ball bearings (HSL and HSFL types)

For eco-friendly air-oil lubricated angular contact ball bearings (HSL and HSFL types), the angle of the inner ring outer surface (counterbore area) is optimized compared with that of HSE and HSF types. In addition, these angular contact ball bearings are dedicated to air-oil lubrication by adopting a circumferential groove and an eco-friendly nozzle. They accommodate the same high speed as HSE and HSF types while being more eco-friendly. They generate less noise and conserve energy since they consume less air and oil. The accuracies of these bearing types are JIS Class 4 or better. For the HSL type, two contact angles 20° (no symbol), and 25° ("AD") are available. For the HSFL type, contact angle 25° ("AD") is available. The HSFL type utilizes a specially designed eco-friendly nozzle.

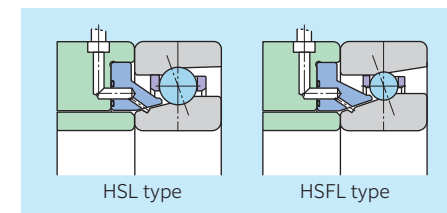


Fig. 9.5 Eco-friendly angular contact ball bearings

■ Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (HSEW type)

HSEW type is designed based on HSE type as high speed angular contact ball bearing for air-oil lubrication with lubrication hole on outer ring.

Spacers next to these bearings don't need length for nozzle to be mounted, and can be short. These short spacers have an effect on compact design and rigidity of spindle as a result of shortened distance between bearing and tool.

In addition, direct air-oil supply through the hole on outer ring achieves improved lubricating reliability with low air flow rate and small oil consumption.

JIS Class 5 or higher bearing accuracy is applied on this type. Two kind of contact angles are available, 20° (no symbol) and 25° ("AD").

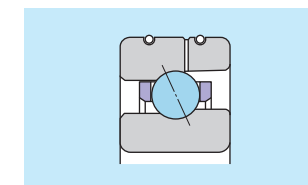


Fig. 9.6 Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring

■ High speed angular contact ball bearings for grinding machines/motors (BNT type)

The boundary dimensions of high speed angular contact ball bearings for grinding machines/motors (BNT type) are determined according to the JIS dimension series (9, 0, 2). For this bearing type, only one contact angle (15°, no symbol) is available, and the bearing accuracies are JIS Class 5 or better. This bearing uses mainly air-oil lubrication and oil mist lubrication. The features of this bearing are high speed capability and high load capacity. This type of bearing is available with either steel balls or ceramic balls.

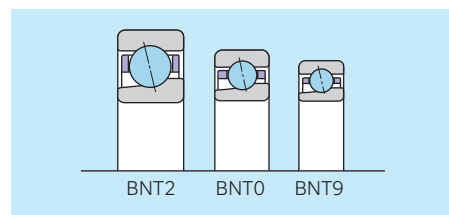


Fig. 9.7 High speed angular contact ball bearings for grinding machines/motors

Sealed bearings

■ Grease-lubricated sealed standard angular contact ball bearings (79 LLB/70 LLB types)

The grease-lubricated sealed standard angular contact ball bearings are available in 79 and 70 series. Non-contact rubber seals are mounted on both sides and special grease is used. As a result, these bearings accommodate high speed, offer prolonged service life, and help to maintain a comfortable working environment. These bearings are available in contact angles of 15° (contact angle symbol "CD") and 25° ("AD") and with a special accuracy of P42 (JIS Class 4 dimensional accuracy and JIS Class 2 running accuracy). Since they are prefilled with grease, these bearings require no cleaning before use and are therefore easy to handle. They are available with either steel balls or ceramic balls.




Fig. 9.8 Grease-lubricated sealed standard angular contact ball bearings

■ Grease-lubricated sealed high speed angular contact ball bearings (BNS LLB type)

Grease-lubricated sealed high speed angular contact ball bearings (BNS LLB type) are available with the boundary dimensions of HSE type. Non-contact rubber seals are incorporated on both sides and its inner structure is optimized. It is also prefilled with a special grease to achieve high speed capability, inhibit temperature rise, extend service life and create a comfortable working environment. This bearing type is available in contact angles of 15° (contact angle symbol "CD"), 20° (no symbol), and 25° ("AD"). Bearing accuracy is JIS Class 4 or better. The bearing ring is made of a special material, and the surface is modified to protect the bearing from wear and seizure. Since this type is prefilled with grease, it requires no cleaning before use and is therefore easy to handle. It is available with either steel balls or ceramic balls.




Fig. 9.9 Grease-lubricated sealed high speed angular contact ball bearings

9.2 Standard cage types

Table 9.1 Standard cage of angular contact ball bearings for radial loads

Bearing type	Polyamide resin cage	Machined phenol resin cage	Machined high tensile brass cage
78C	—	7805C to 7824C	7826C to 7834C
79U (15°, 25°, 30°), 79C	7900U to 7926U	—	7928C to 7934C
70U (15°, 25°, 30°), 70C	7000U to 7028U	—	7030C to 7040C
72C	7200C to 7220C	7221C to 7228C	—
HSE9U (15°, 20°, 25°)	—	HSE910U to HSE934U	—
HSE0 (15°, 20°, 25°)	—	HSE010 to HSE034	—
HSF0	—	HSF010 to HSF020	—
HSL9U (20°, 25°)	—	HSL910U to HSL926U	—
HSL0 (20°, 25°)	—	HSL010 to HSL026	—
HSFL0	—	HSFL010 to HSFL020	—
HSEW9U (20°, 25°)	—	HSEW910U to HSEW920U	—
HSEW0 (20°, 25°)	—	HSEW010 to HSEW020	—
79 LLB (15°, 25°)	7900 LLB to 7910 LLB	—	—
70 LLB (15°, 25°)	7000 LLB to 7010 LLB	—	—
BNS9 LLB (15°, 20°, 25°)	—	BNS910 LLB to BNS920 LLB	—
BNS0 LLB (15°, 20°, 25°)	—	BNS010 LLB to BNS020 LLB	—
BNT9	—	BNT900 to BNT913	—
BNT0	—	BNT000 to BNT014	—
BNT2	—	BNT200 to BNT216	—

Note 1) Cage design is subject to change without notice. For detailed information, contact NTN Engineering.

2) The polyamide resin cage can be used up to the following rotating speeds depending on the material of the rolling element. The d_{min} value 0.9×10^6 for bearing steel and d_{min} value 1.0×10^6 for ceramics. Machined phenol resin cages must be used if the allowable speed listed in the dimension tables exceeds the figures above. For detailed information, contact NTN Engineering.

9.3 Bearing designations

78, 79, 70 and 72 types

5S- 7 0 20 U C T1 DB /GL P4

- Precision class**
P5: JIS Class 5, P4: JIS Class 4, P2: JIS Class 2
- Internal clearance and preload code**
GL: Light preload, GN: Normal preload, GM: Medium preload, Gxx: Special preload, CSxx: Special clearance
- Matching code**
DB: Back-to-back (double-row)
DT: Tandem (double-row)
DTBT: Tandem back-to-back (quad-row)
G: Flush ground (single-row)
- Cage code**
T1: Machined phenol resin cage
L1: Machined high tensile brass cage
No code: Standard cage
- Contact angle code**
C: 15°, AD: 25°, No symbol: 30°
- Bearing series (ULTAGE™ series)**
- Bore diameter code (See dimension table)**
- Dimension series code**
- Bearing type**
- Material code**
5S: Ceramic rolling elements
No code: Steel rolling elements

HSE type

5S- 2LA-HSE 0 20 AD T2 DB /GL P4

- Cage code**
T2: Polyamide resin cage
No code: Machined phenol resin cage
- Contact angle code**
C: 15°, AD: 25°, No symbol: 20°
- Bore diameter code (See dimension table)**
- Dimension series code**
- Bearing type**
- 2LA: Special material with improved surface treatment**

HSL type

5S- 2LA-HSL 0 20 DB +xx Dn /GL P4 +TKZ

- Spacer code**
(Located beside bearings)
- Spacer code**
(Located between bearings)
- Spacer width dimension**
- Bearing type**

(notes) HSL: Bearing series code
xxDn, +TKZ: Spacer with Eco- friendly nozzle

HSEW type

5S- 2LA-HSEW 0 20 DB /GL P4

- Bearing type**

79 LLB/ 70 LLB types

5S- 7006 CD LLB DB /GL P42 /L749

- Accuracy class**
P42: Dimensional accuracy = JIS Class 4, running accuracy = JIS Class 2
- Contact angle code**
CD: 15°
AD: 25°

BNS LLB type

5S- 2LA-BNS 0 20 LLB DB /GL P4 /L749

- Grease code**
/L448: Special grease (MP-1)
/L749: Special grease (SE-1)
- Seal code**
LLB: Non-contact rubber seal on both sides
- Bearing type**

BNT type

5S- BNT 0 00 /GN P2

- Bore diameter code (See dimension table)**
- Dimension series code**
- Bearing type**

9.4 Bearing accuracy

Table 9.2 Inner rings

Nominal bore diameter d		Deviation of mean bore diameter in a single plane Δ_{dmp}						Variation of bore diameter in a single plane V_{dsp}						Variation of mean bore diameter V_{dmp}			Radial runout of inner ring of assembled bearing K_{ia}		
		Class 5		Class 4 ¹⁾		Class 2 ¹⁾		Diameter series 9			Diameter series 0, 2			Class 5 Class 4 Class 2			Class 5 Class 4 Class 2		
mm over	incl.	high	low	high	low	high	low	Class 5 max	Class 4	Class 2	Class 5 max	Class 4	Class 2	Class 5 max	Class 4	Class 2	Class 5 max	Class 4	Class 2
2.5	10	0	-5	0	-4	0	-2.5	5	4	2.5	4	3	2.5	3	2	1.5	4	2.5	1.5
10	18	0	-5	0	-4	0	-2.5	5	4	2.5	4	3	2.5	3	2	1.5	4	2.5	1.5
18	30	0	-6	0	-5	0	-2.5	6	5	2.5	5	4	2.5	3	2.5	1.5	4	3	2.5
30	50	0	-8	0	-6	0	-2.5	8	6	2.5	6	5	2.5	4	3	1.5	5	4	2.5
50	80	0	-9	0	-7	0	-4	9	7	4	7	5	4	5	3.5	2	5	4	2.5
80	120	0	-10	0	-8	0	-5	10	8	5	8	6	5	5	4	2.5	6	5	2.5
120	150	0	-13	0	-10	0	-7	13	10	7	10	8	7	7	5	3.5	8	6	2.5
150	180	0	-13	0	-10	0	-7	13	10	7	10	8	7	7	5	3.5	8	6	5
180	250	0	-15	0	-12	0	-8	15	12	8	12	9	8	8	6	4	10	8	5

1) The dimensional difference Δ_{ds} of the measured bore diameter applied to Classes 4 and 2 is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane. However, the dimensional difference is applied to diameter series 0 and 2 for Class 4, and also to all the diameter series for Class 2.

Table 9.3 Outer rings

Nominal outside diameter D		Deviation of mean outside diameter in a single plane Δ_{Dmp}						Variation of outside diameter in a single plane V_{Dsp}						Variation of mean outside diameter V_{Dmp}			Radial runout of outer ring of assembled bearing K_{ea}		
		Class 5		Class 4 ³⁾		Class 2 ³⁾		Diameter series 9			Diameter series 0, 2			Class 5 Class 4 Class 2			Class 5 Class 4 Class 2		
mm over	incl.	high	low	high	low	high	low	Class 5 max	Class 4	Class 2	Class 5 max	Class 4	Class 2	Class 5 max	Class 4	Class 2	Class 5 max	Class 4	Class 2
18	30	0	-6	0	-5	0	-4	6	5	4	5	4	4	3	2.5	2	6	4	2.5
30	50	0	-7	0	-6	0	-4	7	6	4	5	5	4	4	3	2	7	5	2.5
50	80	0	-9	0	-7	0	-4	9	7	4	7	5	4	5	3.5	2	8	5	4
80	120	0	-10	0	-8	0	-5	10	8	5	8	6	5	5	4	2.5	10	6	5
120	150	0	-11	0	-9	0	-5	11	9	5	8	7	5	6	5	2.5	11	7	5
150	180	0	-13	0	-10	0	-7	13	10	7	10	8	7	7	5	3.5	13	8	5
180	250	0	-15	0	-11	0	-8	15	11	8	11	8	8	8	6	4	15	10	7
250	315	0	-18	0	-13	0	-8	18	13	8	14	10	8	9	7	4	18	11	7

3) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Classes 4 and 2 is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane. However, the dimensional difference is applied to diameter series 0 and 2 for Class 4, and also to all the diameter series for Class 2.

Unit: μm

Perpendicularity of inner ring face with respect to the bore			Axial runout of inner ring of assembled bearing			Deviation of a single inner ring width				Variation of inner ring width				
						Δ_{Bs}								
S_d			S_{ia}			Single bearing		Duplex bearing ²⁾		V_{Bs}				
Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	Class 5	Class 4	Class 2
max			max			high	low	low	high	low		max		
7	3	1.5	7	3	1.5	0	− 40		0	− 250		5	2.5	1.5
7	3	1.5	7	3	1.5	0	− 80		0	− 250		5	2.5	1.5
8	4	1.5	8	4	2.5	0	− 120		0	− 250		5	2.5	1.5
8	4	1.5	8	4	2.5	0	− 120		0	− 250		5	3	1.5
8	5	1.5	8	5	2.5	0	− 150		0	− 250		6	4	1.5
9	5	2.5	9	5	2.5	0	− 200		0	− 380		7	4	2.5
10	6	2.5	10	7	2.5	0	− 250		0	− 380		8	5	2.5
10	6	4	10	7	5	0	− 250		0	− 380		8	5	4
11	7	5	13	8	5	0	− 300		0	− 500		10	6	5

2) Applies to individual raceway rings manufactured for combined bearing use.

Unit: μm

Perpendicularity of outer ring outside surface with respect to the face S_D			Axial runout of outer ring of assembled bearing S_{ea}			Deviation of a single outer ring width Δ_{Cs}		Variation of outer ring width V_{Cs}		
						All classes		Class 5 Class 4 Class 2		
Class 5	Class 4	Class 2	Class 5	Class 4	Class 2			Class 5 max	Class 4	Class 2
8	4	1.5	8	5	2.5	Depends on tolerance of Δ_{Bs} in relation to d of the same bearing		5	2.5	1.5
8	4	1.5	8	5	2.5			5	2.5	1.5
8	4	1.5	10	5	4			6	3	1.5
9	5	2.5	11	6	5			8	4	2.5
10	5	2.5	13	7	5			8	5	2.5
10	5	2.5	14	8	5			8	5	2.5
11	7	4	15	10	7			10	7	4
13	8	5	18	10	7			11	7	5

9.5 Internal clearance and standard preload of duplex angular contact ball bearings

The initial internal clearance or preload for duplex angular contact ball bearings is determined with consideration for two factors: temperature rise during operation and the rigidity and accuracy required after assembly or during operation.

The internal clearance of the bearing may be significantly affected during operation due to three factors: the reduction in clearance caused by fits, the temperature difference between the inner and outer rings during operation, and the effects of centrifugal force. Depending on the initial internal clearance, a significantly reduced clearance may result in extreme temperature rise, vibration, noise, and short service life. In addition, seizure may result in some cases. For this reason, it is important to determine the optimal initial internal clearance and initial preload required for operation. When using a duplex angular contact ball bearing on the main spindle of a machine tool, the preload is determined by considering the type, main spindle configuration, lubrication system, drive system, intended functions, and other factors. However, preload can also be generalized by the $d_m n$ value [d_m : pitch circle diameter across rolling elements (mm), n : speed (min^{-1})], as shown below:

$d_m n$ value $\leq 0.5 \times 10^6$
 Normal preload (GN)
 $0.5 \times 10^6 < d_m n$ value $\leq 0.65 \times 10^6$
 Light preload (GL)
 $d_m n$ value $> 0.65 \times 10^6$
 0 to positive clearance

For detailed information, contact **NTN** Engineering.

For duplex angular contact ball bearings, **NTN** recommends the initial radial internal clearances and standard preloads shown in **Table 9.4** through **Table 9.21**. Select the optimal radial internal clearance and initial preload for your application. When ordering a duplex angular contact ball bearing, please specify the desired preload and clearance. If these are not specified in the order, we will ship a bearing with standard clearance. However, some product types do not have a standard clearance. In this case, we will inform you of the available clearances.

Table 9.4 Radial internal clearance of duplex angular contact ball bearings

Unit: μm

Nominal bore diameter d (mm)		C1		C2		CN (normal)	
over	incl.	min	max	min	max	min	max
—	10	3	8	6	12	8	15
10	18	3	8	6	12	8	15
18	30	3	10	6	12	10	20
30	50	3	10	8	14	14	25
50	80	3	11	11	17	17	32
80	100	3	13	13	22	22	40
100	120	3	15	15	30	30	50
120	150	3	16	16	33	35	55
150	180	3	18	18	35	35	60
180	200	3	20	20	40	40	65

■ Standard preloads of angular contact ball bearings (DB and DF arrangements)

Table 9.5 Standard angular contact ball bearings (78C type) Unit: N

Nominal bore diameter d (mm)	Contact angle: 15°		
	78xxC		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
25	10	29	78
30	10	29	78
35	10	29	78
40	10	29	78
45	20	49	98
50	20	49	98
55	29	98	196
60	29	98	196
65	29	98	196
70	29	98	196
75	29	98	196
80	29	98	196
85	49	147	294
90	49	147	294
95	49	147	294
100	49	147	294
105	49	147	294
110	78	196	490
120	78	196	490
130	98	294	590
140	98	294	590
150	147	390	785
160	147	390	785
170	147	490	980

Table 9.6 Standard angular contact ball bearings (79 type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 25°			Contact angle: 30°		
	79xxUC/5S-79xxUC			79xxUAD/5S-79xxUAD			79xxU/5S-79xxU		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	—	20	39	—	29	59	—	39	78
12	—	20	39	—	29	69	—	39	78
15	—	29	59	—	49	98	20	59	118
17	—	29	69	20	49	98	20	69	127
20	20	49	88	20	69	147	29	88	186
25	20	49	98	20	78	157	29	98	196
30	20	49	108	20	78	167	29	98	206
35	29	78	167	39	127	255	49	167	325
40	29	88	177	39	137	275	49	167	345
45	39	108	216	49	167	345	69	216	420
50	39	118	226	49	177	355	69	226	450
55	39	118	235	59	186	375	69	235	460
60	39	127	245	59	196	380	78	245	480
65	39	127	245	59	196	390	78	245	490
70	59	177	365	88	284	560	108	355	695
75	59	177	365	88	284	570	108	355	705
80	59	186	365	88	284	580	108	365	715
85	78	245	490	118	390	775	147	480	970
90	88	255	500	118	390	785	147	490	980
95	88	255	510	118	400	795	157	500	990
100	108	325	655	157	510	1 020	196	635	1 270
105	108	335	655	157	520	1 040	196	645	1 300
110	108	335	665	157	530	1 060	206	655	1 310
120	137	410	835	196	655	1 300	245	815	1 620
130	167	510	1 020	235	805	1 600	305	990	1 990
79xxC									
140	196	490	980						
150	245	685	1 470						
160	245	685	1 470						
170	245	685	1 470						

Table 9.7 Standard angular contact ball bearings (70 type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 25°			Contact angle: 30°		
	70xxUC/5S-70xxUC			70xxUAD/5S-70xxUAD			70xxU/5S-70xxU		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	—	29	59	20	49	108	20	69	127
12	—	39	69	20	59	108	20	69	137
15	—	39	78	20	59	127	29	78	157
17	20	49	98	20	78	157	29	98	196
20	20	69	137	29	108	216	39	137	265
25	29	78	147	39	118	235	49	147	294
30	29	98	186	49	147	305	59	186	375
35	39	118	235	59	186	380	69	235	480
40	39	127	255	59	206	400	78	255	510
45	49	147	305	69	245	480	88	305	600
50	49	157	325	78	255	510	98	325	635
55	69	216	420	98	335	665	127	420	845
60	69	216	430	108	345	685	127	430	855
65	78	226	460	108	365	725	137	450	900
70	98	294	580	137	460	920	177	580	1 150
75	98	294	600	137	470	940	177	590	1 180
80	118	365	725	177	580	1 150	216	715	1 430
85	127	375	745	177	590	1 180	226	735	1 470
90	147	440	890	206	705	1 400	265	875	1 750
95	157	460	910	216	715	1 430	275	900	1 790
100	157	460	930	226	735	1 470	284	920	1 830
105	186	550	1 090	255	865	1 720	335	1 070	2 140
110	206	630	1 250	294	990	1 980	380	1 230	2 460
120	216	635	1 270	305	1 010	2 020	380	1 260	2 510
130	265	805	1 600	380	1 270	2 530	480	1 570	3 150
140	275	815	1 640	380	1 280	2 570	490	1 610	3 200
70xxC									
150	294	785	1 960						
160	490	980	2 450						
170	490	980	2 450						
180	490	980	2 450						
190	590	1 470	3 450						
200	590	1 470	3 450						

Table 9.8 Standard angular contact ball bearings (72C type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°		
	72xxC		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	20	49	98
12	20	49	98
15	20	49	147
17	20	49	147
20	49	98	294
25	49	98	294
30	49	98	294
35	78	196	490
40	78	196	490
45	98	294	590
50	98	294	590
55	147	390	785
60	147	390	785
65	147	390	785
70	196	490	980
75	196	490	980
80	196	490	980
85	294	685	1 470
90	294	685	1 470
95	294	685	1 960
100	294	685	1 960
105	390	980	2 450
110	390	980	2 450
120	390	980	2 450
130	490	1 470	2 940

Table 9.9 High speed angular contact ball bearings (HSE9U type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 20°			Contact angle: 25°		
	HSE9xxUC/5S-HSE9xxUC			HSE9xxU/5S-HSE9xxU			HSE9xxUAD/5S-HSE9xxUAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	34	88	177	39	127	255	39	177	345
55	44	108	216	49	157	345	49	216	440
60	44	118	226	49	167	345	54	226	440
65	44	118	226	49	167	345	54	226	440
70	69	167	345	74	245	490	78	345	685
75	69	177	345	74	255	490	83	345	685
80	69	177	345	74	255	540	83	345	685
85	98	235	490	98	345	685	108	490	930
90	98	245	490	108	345	735	118	490	980
95	98	255	490	108	345	735	118	490	980
100	118	294	590	127	440	835	137	590	1 180
105	118	294	590	127	440	885	137	590	1 180
110	118	294	590	127	440	885	137	590	1 180
120	157	390	785	167	540	1 080	177	785	1 570
130	186	490	930	196	685	1 370	226	930	1 860
140	186	490	930	206	685	1 370	226	930	1 860
150	255	635	1 270	275	930	1 860	294	1 270	2 550
160	255	635	1 270	275	930	1 860	294	1 270	2 550
170	255	635	1 270	275	930	1 860	294	1 270	2 550

Table 9.10 High speed angular contact ball bearings (HSE0 type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 20°			Contact angle: 25°		
	HSE0xxC/5S-HSE0xxC			HSE0xx/5S-HSE0xx			HSE0xxAD/5S-HSE0xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	59	157	315	69	235	460	78	305	600
55	69	177	345	78	255	510	78	325	645
60	69	186	365	78	265	530	88	345	685
65	69	186	365	78	265	540	88	345	695
70	88	226	450	98	325	655	108	420	845
75	98	235	480	108	355	695	118	450	900
80	108	275	550	118	400	805	127	520	1 030
85	108	275	560	118	400	815	127	520	1 040
90	127	325	645	137	470	940	157	610	1 220
95	127	325	645	147	480	960	157	620	1 240
100	137	345	675	147	490	990	157	635	1 270
105	157	390	775	167	570	1 140	186	725	1 450
110	196	480	960	206	695	1 400	226	900	1 800
120	196	480	960	216	705	1 410	226	910	1 820
130	275	695	1 380	305	1 020	2 030	325	1 300	2 610
140	284	715	1 430	315	1 050	2 090	345	1 350	2 710
150	294	735	1 470	325	1 080	2 150	345	1 380	2 770
160	345	865	1 730	375	1 260	2 520	410	1 630	3 250
170	390	990	1 980	430	1 450	2 900	470	1 860	3 750

Table 9.11 Eco-friendly air-oil lubricated angular contact ball bearings (HSL9U type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 20°			Contact angle: 25°		
	5S-HSL9xxU			5S-HSL9xxUAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	39	127	255	39	177	345
55	49	157	345	49	216	440
60	49	167	345	54	226	440
65	49	167	345	54	226	440
70	74	245	490	78	345	685
75	74	255	490	83	345	685
80	74	255	540	83	345	685
85	98	345	685	108	490	930
90	108	345	735	118	490	980
95	108	345	735	118	490	980
100	127	440	835	137	590	1 170
105	127	440	885	137	590	1 170
110	127	440	885	137	590	1 170
120	167	540	1 080	177	785	1 570
130	196	685	1 370	226	930	1 860

Table 9.12 Eco-friendly air-oil lubricated angular contact ball bearings (HSL0 type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 20°			Contact angle: 25°		
	5S-HSL0xx			5S-HSL0xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	69	235	460	78	305	600
55	78	255	510	78	325	645
60	78	265	530	88	345	685
65	78	265	540	88	345	695
70	98	325	655	108	420	845
75	108	355	695	118	450	900
80	118	400	805	127	520	1 030
85	118	400	815	127	520	1 040
90	137	470	940	157	610	1 220
95	147	480	960	157	620	1 240
100	147	490	990	157	635	1 270
105	167	570	1 140	186	725	1 450
110	206	695	1 400	226	900	1 800
120	216	705	1 410	226	910	1 820
130	305	1 020	2 030	325	1 300	2 610

Table 9.13 Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (HSEW9U type)

Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 20°			Contact angle: 25°		
	5S-HSEW9xxU			5S-HSEW9xxUAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	39	127	255	39	177	345
55	49	157	345	49	216	440
60	49	167	345	54	226	440
65	49	167	345	54	226	440
70	74	245	490	78	345	685
75	74	255	490	83	345	685
80	74	255	540	83	345	685
85	98	345	685	108	490	930
90	108	345	735	118	490	980
95	108	345	735	118	490	980
100	127	440	835	137	590	1 170

Table 9.14 Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (HSEW0 type) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 20°			Contact angle: 25°		
	5S-HSEW0xx			5S-HSEW0xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	69	235	460	78	305	600
55	78	255	510	78	325	645
60	78	265	530	88	345	685
65	78	265	540	88	345	695
70	98	325	655	108	420	845
75	108	355	695	118	450	900
80	118	400	805	127	520	1 030
85	118	400	815	127	520	1 040
90	137	470	940	157	610	1 220
95	147	480	960	157	620	1 240
100	147	490	990	157	635	1 270

Table 9.15 Grease-lubricated sealed standard angular contact ball bearings (79CD and AD types) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 25°		
	79xxCD/5S-79xxCD			79xxAD/5S-79xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	10	29	78	—	39	78
12	10	29	78	—	39	78
15	10	29	78	—	49	147
17	10	29	78	—	49	147
20	20	49	98	29	98	196
25	20	49	98	29	98	196
30	20	49	98	29	98	196
35	29	78	196	49	147	294
40	29	78	196	49	147	294
45	39	98	245	49	196	390
50	39	98	245	49	196	390

Table 9.16 Grease-lubricated sealed standard angular contact ball bearings (70CD and AD types) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 25°		
	70xxCD/5S-70xxCD			70xxAD/5S-70xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	20	29	98	29	78	147
12	20	29	98	29	78	147
15	20	29	98	29	78	147
17	20	29	98	29	78	147
20	29	78	147	49	147	294
25	29	78	147	49	147	294
30	29	78	147	49	147	294
35	49	147	294	78	294	590
40	49	147	294	78	294	590
45	49	147	294	78	294	590
50	49	147	294	78	294	590

Table 9.17 Grease-lubricated sealed high speed angular contact ball bearings (BNS9 type) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 20°			Contact angle: 25°		
	BNS9xxC/5S-BNS9xxC			BNS9xx/5S-BNS9xx			BNS9xxAD/5S-BNS9xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
50	29	78	167	39	118	235	39	157	305
55	39	108	206	49	147	305	49	196	390
60	39	108	216	49	157	315	49	196	400
65	39	108	216	49	157	315	49	206	410
70	59	137	275	59	196	400	69	255	520
75	59	137	284	59	206	410	69	265	530
80	59	147	294	59	216	420	69	275	550
85	69	177	345	78	255	510	78	325	655
90	69	177	355	78	265	520	88	335	665
95	69	186	365	78	265	540	88	345	685
100	98	255	510	108	375	755	118	480	970

Table 9.18 Grease-lubricated sealed high speed angular contact ball bearings (BNS0 type) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°			Contact angle: 20°			Contact angle: 25°		
	BNS0xxC/5S-BNS0xxC			BNS0xx/5S-BNS0xx			BNS0xxAD/5S-BNS0xxAD		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
45	49	118	235	49	177	345	59	226	450
50	59	157	315	69	235	460	78	305	600
55	69	177	345	78	255	510	78	325	645
60	69	186	365	78	265	530	88	345	685
65	69	186	365	78	265	540	88	345	695
70	88	226	450	98	325	655	108	420	845
75	98	235	480	108	355	695	118	450	900
80	108	275	550	118	400	805	127	520	1 030
85	108	275	560	118	400	815	127	520	1 040
90	127	325	645	137	470	940	157	610	1 220
95	127	325	645	147	480	960	157	620	1 240
100	137	345	675	147	490	990	157	635	1 270

Table 9.19 Angular contact ball bearings for grinding machines/motors (BNT9 type) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°		
	BNT9xx/5S-BNT9xx		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	10	29	78
12	10	29	78
15	10	29	78
17	10	29	78
20	20	49	98
25	20	49	98
30	20	49	98
35	29	78	196
40	29	78	196
45	39	98	245
50	39	98	245
55	49	118	294
60	49	118	294
65	49	118	294

Table 9.20 Angular contact ball bearings for grinding machines/motors (BNT0 type) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°		
	BNT0xx/5S-BNT0xx		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	20	29	98
12	20	29	98
15	20	29	98
17	20	29	98
20	29	78	147
25	29	78	147
30	29	78	147
35	49	147	294
40	49	147	294
45	49	147	294
50	49	147	294
55	98	196	490
60	98	196	490
65	98	196	490
70	98	294	685

Table 9.21 Angular contact ball bearings for grinding machines/motors (BNT2 type) Unit: N

Nominal bore diameter <i>d</i> (mm)	Contact angle: 15°		
	BNT2xx/5S-BNT2xx		
	Light preload (GL)	Normal preload (GN)	Medium preload (GM)
10	20	49	98
12	20	49	98
15	20	49	147
17	20	49	147
20	49	98	294
25	49	98	294
30	49	98	294
35	78	196	490
40	78	196	490
45	98	294	590
50	98	294	590
55	147	390	785
60	147	390	785
65	147	390	785
70	196	490	980
75	196	490	980
80	196	490	980

9.6 Recommended fits for angular contact ball bearings

If the d_{mn} value is in the range of $d_{mn} \leq 0.75 \times 10^6$ [d_m : pitch circle diameter across rolling elements (mm), n : speed (min^{-1})], the fit values shown in **Table 9.22** and **Table 9.23** are recommended to ensure high accuracies of precision bearings.

If the d_{mn} value is in the range of $d_{mn} > 0.75 \times 10^6$, it is necessary to consider expansion of inner ring caused by centrifugal force. In this case, contact **NTN Engineering** for the recommended fits. As for the fit of the outer ring with the housing, consider the influence of the ambient temperature (such as heat buildup on a built-in motor or the cooling effect of jacket). For technical assistance, contact **NTN Engineering**.

Table 9.22 Shaft fits

Unit: μm

Nominal bore diameter d (mm)		Fits of inner ring with shaft
Over	Incl.	
2.5	10	0-2T
10	18	0-2T
18	30	0-2T
30	50	0-3T
50	80	1T-4T
80	120	1T-5T
120	180	2T-7T
180	250	2T-8T

Notes: 1. The mean value should be the target value.
2. If the d_{mn} value of the high speed machine is in the range of $d_{mn} > 0.75 \times 10^6$, it is necessary to increase the amount of interference. In this case, contact **NTN Engineering** for technical assistance.
T: Tight (Interference) fit

Table 9.23 Housing fits

Unit: μm

Nominal outside diameter D (mm)		Fits of outer ring with housing	
Over	Incl.	Bearing on fixed side	Bearing on free side
10	50	2L- 5L	6L-10L
50	80	3L- 7L	6L-12L
80	120	4L- 9L	8L-13L
120	150	5L-11L	10L-16L
150	180	6L-13L	11L-17L
180	250	7L-15L	13L-20L
250	315	8L-17L	15L-23L

Notes: 1. The mean value should be the target value.
2. If the d_{mn} value is in the range of $d_{mn} > 1.0 \times 10^6$, spacer width and bearing arrangement, it is necessary to increase the amount of interference. In this case, contact **NTN Engineering** for technical assistance.
L: Loose fit

9.7 Duplex angular contact ball bearings

Duplex angular contact ball bearings can be combined in rows of two, three or four bearings to accommodate required specifications.

The back-to-back duplex (DB) arrangement and the face-to-face duplex (DF) arrangement allow for the application of both radial loads and axial loads in both directions. The DB arrangement has a wide space between load points and can handle large moment loads. For this reason, this type of duplex arrangement is preferable for use on the main spindles of machine tools.

The DF arrangement cannot handle large moment loads, but its allowable inclination angle is greater than that of the DB arrangement. The tandem duplex (DT) arrangement can handle both a radial load and large axial load, but this bearing can take the axial load in one direction only. The 4-row duplex (type DTBT) arrangement ensures high rigidity in the radial and axial directions and accommodates high speed operation. For this reason, this type of duplex bearing is commonly used for the main spindles of machining centers.

Each duplex angular contact ball bearing is manufactured as a set to enable adjustment of the preload and clearance. For this reason, combine only duplex bearings of the same product number.

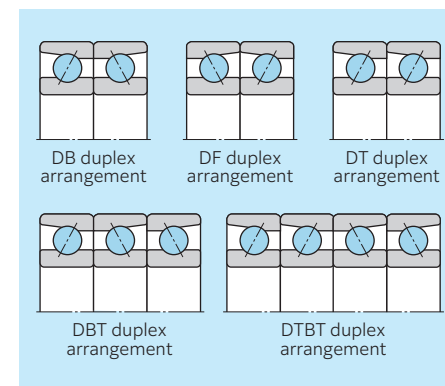


Fig. 9.10

9.8 Duplex arrangement codes of duplex angular contact ball bearings

Duplex angular contact ball bearings have a product number and duplex arrangement code on the side of the bearing (see Fig. 9.11). Duplex angular contact ball bearings of 3 rows or more have a "<" mark on the outside diameter surface of the bearing. Always ensure that the "<" mark is aligned when assembling them (see Fig. 9.12). Additionally, face-to-face duplex (DF) and back-to-back duplex (DB) angular contact ball bearings do not have the "<" mark, so use the duplex arrangement code to match them.

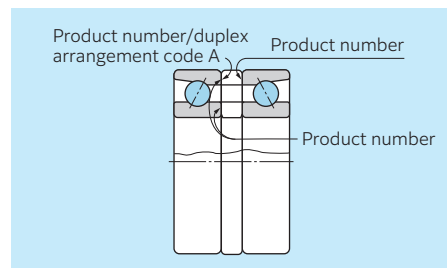


Fig. 9.11

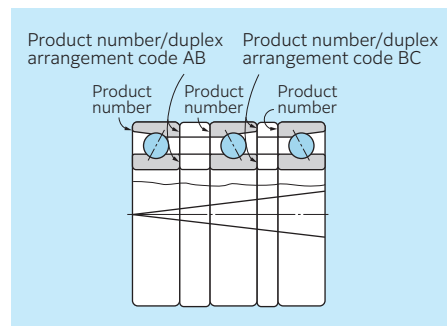


Fig. 9.12

9.9 Flush ground and universal matching

Angular contact ball bearings are often combined for a special purpose. Face-to-face duplex (DF) arrangement, back-to-back duplex (DB) arrangement and tandem duplex (DT) arrangement may be combined in rows of two or more. When combining many bearings, it is important to control the accuracies of the bearings and to align their stand outs in a common plane.

■ Flush ground

"Flush ground" is a finishing technique in which the front and back faces of the inner and outer rings are aligned with each other to eliminate differences in stand out (see Fig. 9.13). Such alignment can ensure the specified clearance and preload for DF, DB, and DT sets, but it is possible only if the combined bearings have the same clearance/preload symbols. Flush ground is provided as standard on BNT type angular contact ball bearings for grinding machines/motors as well as BST and 2A-BST type angular contact thrust ball bearings for ball screw support.

Note: The flush ground technique is also adopted for other types of angular contact ball bearings. When ordering a bearing, append "G" to the product number to specify the flush ground type.
Example: 7010UC G /GNP4

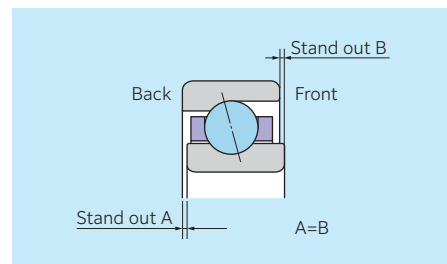


Fig. 9.13 Flush ground

■ Universal Matching

In addition to the flush ground technique, universal matching is employed for duplex angular contact ball bearings. Universal matching controls the bearing-to-bearing dimensional differences in the bore and outside diameters.

NTN can control the bearing-to-bearing difference in the bore and outside diameters to no more than one-third the tolerance (a minimum of 2 μm). Universal matching

is adopted for duplex angular contact ball bearings of JIS Class 5 or better. When ordering a bearing, specify the desired number of duplex bearings to be used in combination ("D2" for DB, DF or DT; and "D3" for DBT, DFT or DTT). Alternately, indicate the basic combination and specify universal matching.

If two duplex bearings are combined, "D2" is appended to the product number.

Example: 7010UC G D2 /GNP4

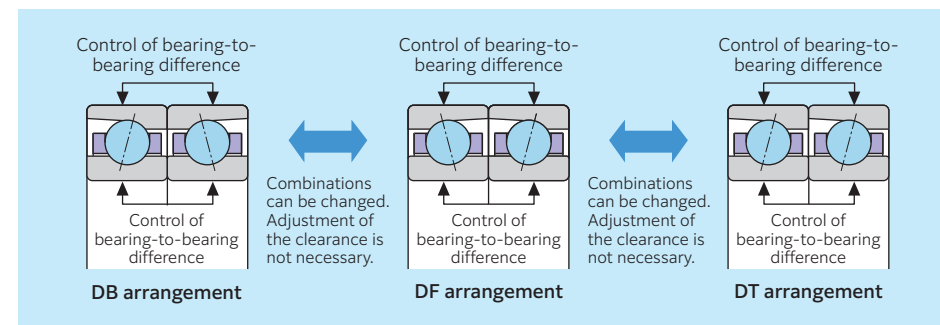


Fig. 9.14 Universal matching

9.10 Angular contact ball bearings with ceramic balls

Recently, the main spindles of machining centers, NC machines and other machine tools have been required to operate at much higher speeds. Bearings for main spindles therefore must meet the requirements of high speed and rigidity as well as accuracy. To meet such requirements, many of our customers want the rolling element made of ceramic material. The features of angular contact ball bearings with ceramic balls are described below.

Limited temperature rise and ultra high speeds

The specific gravity of ceramic material is one-half that of bearing steel. In addition, the ball diameter of 5S-HSE type is smaller than that of the standard 70 type. For this reason, use of ceramic balls greatly reduces the influence of centrifugal force (ball sliding and spinning caused by gyratory moment).

The linear expansion coefficient for ceramics can be as low as a 1/4 of that for bearing steel. This will reduce the increase in preload at high speeds due to a fixed position preload.

As a result, these angular contact ball bearings inhibit temperature buildup and ensure high speed.

High bearing rigidity for high accuracy of manufactured products

The Young's modulus of ceramic material is approximately 1.5 times that of bearing steel, which increases bearing rigidity and can be expected to improve the precision of the workpiece.

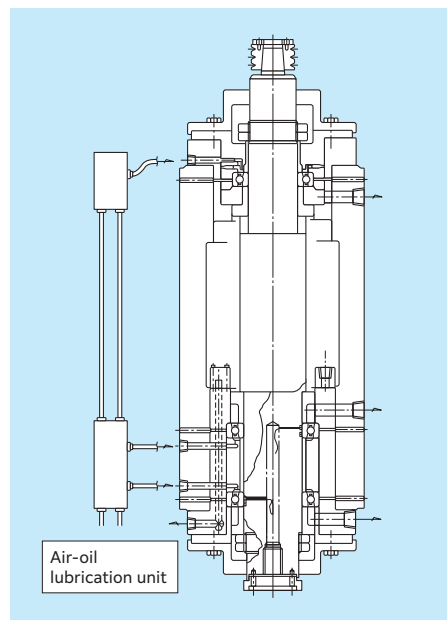


Fig. 9.16 Test rig for measuring temperature rise

Table 9.24 Comparison of physical properties between ceramic and steel balls

Item	Ceramic (Si ₃ N ₄)	Bearing steel (SUJ2)
Density (g/cm ³)	3.24	7.83
Young's modulus (GPa)	308	208
Poisson's ratio	0.25	0.3
Linear expansion coefficient (×10 ⁻⁶ /°C)	3.0	12.5
Thermal conductivity (W/m · °C)	20	46

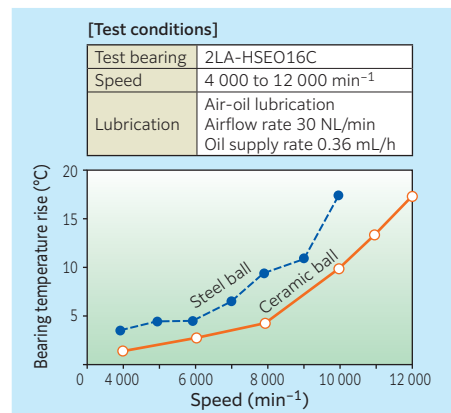


Fig. 9.15 Comparison of temperature rise between bearings with ceramic balls and those with steel balls

9.11 Operating life of bearings with ceramic balls

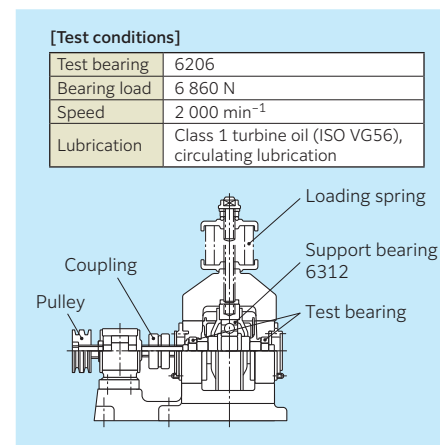


Fig. 9.17 Radial load-type bearing life test machine

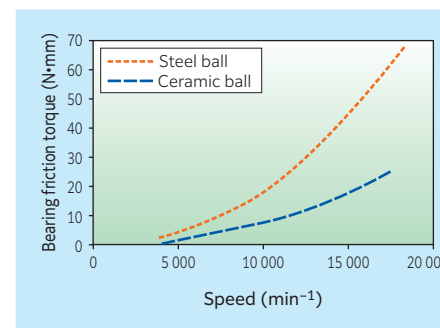


Fig. 9.19 Bearing friction torque

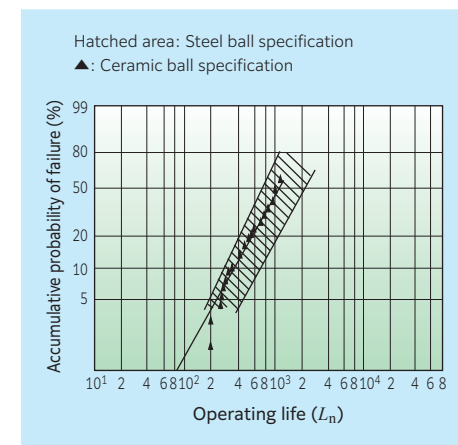


Fig. 9.18 Operating life of ball bearing with ceramic balls

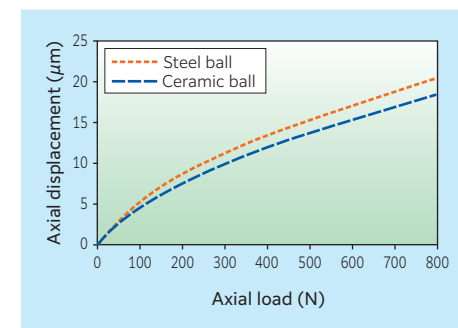


Fig. 9.20 Axial rigidity diagram

9.12 Recommended lubrication specifications

Angular contact ball bearings are usually used with grease lubrication or air-oil lubrication. Recommended lubrication specifications are described below.

■ Grease lubrication

● Recommended brand of grease

Refer to 7. Lubrication of Bearings, 7.1 Grease lubrication in the Technical Data section.

● Recommended grease fill

15 to 20 % of the internal free space shown in the dimension tables

It is recommended to aim for the lower limit to reduce the running-in operation time.

● Recommended grease filling method

Refer to 6. Handling of Bearings, 6.1 Cleaning and filling with grease in the Technical Data section.

● Notes

Grease-lubricated sealed angular contact ball bearings (79 LLB/70 LLB types, and BNS type bearings) are prefilled with long-life SE-1 grease. Wipe rust preventive oil from the outside of the bearing with a clean cloth.

■ Air-oil lubrication

● Recommended location of nozzle

Refer to 7. Lubrication of Bearings, 7.2 Air-oil lubrication in the Technical Data section.

● Recommended specifications of nozzle

Nozzle bore dia.: From 1 to 1.5 mm
Number of nozzles: One nozzle per bearing, depth of nozzle bore should be three to six times as large as the bore diameter.

● Recommended specifications of air-oil

Oil type: Spindle oil
Viscosity grade: ISO VG from 22 to 32 (32 is preferable)

Table 9.25 Air and oil amount

Bearing type	d_{m^h} value (×10 ⁶)		Oil volume per shot	Lubrication intervals	Oil consumption	Recommended air consumption NL/min ¹⁾
	Over	Incl.	mL	min	mL/h	
78C, 79U, 70U, 72C	—	1.0	0.03	8	0.23	20 to 40
HSE9U, HSE0	1.0	1.5		5	0.36	
HSF	1.5	2.6		2	0.90	
HSEW	—	2.2		10	0.18	
HSL						
HSFL	—	2.6				

1) NL/min (Normal liter/minute) -- NL means the volume of air at 0 °C and 1 atmosphere.

Note) The amount of oil and air needs to be adjusted to suit the spindle structure or the differences in discharge channels.

Set the amounts after checking with actual machine tests.

9.13 ULTAGE Standard angular contact ball bearings 79U and 70U types

ULTAGE™ series 79U and 70U types bearings were developed from standard angular contact ball bearings (79 and 70). Optimized internal design and adoption of a new resin cage allows high speed operation and ensures high rigidity.

■ Features

1. Optimized internal design enables high speed operation and high rigidity.
2. A new resin cage enables improvement in grease retention for grease lubrication and enhanced performance in feeding and discharge of oil for air-oil lubrication.
3. Bearings are available with either steel or ceramic balls.
4. Three contact angles (15°, 25°, and 30°) are available to handle a wide range of applications.

■ Bearing specification

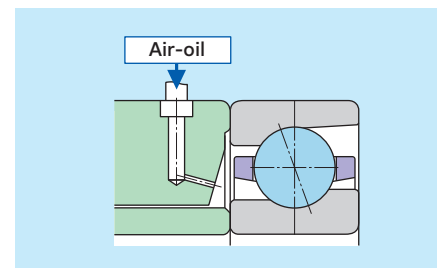


Fig. 9.21 79U and 70U types



Photo 9.1 New resin cage

■ Data

Optimized internal design and adoption of a new resin cage enable stable operation at d_{mn} value 0.95×10^6 , with grease lubrication (see Fig.9.22).

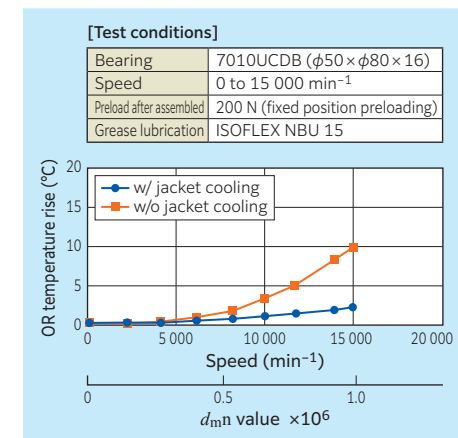


Fig. 9.22 High speed test with grease lubrication

Stable operation is possible with d_{mn} value 1.5×10^6 , with air-oil lubrication (see Fig.9.23).


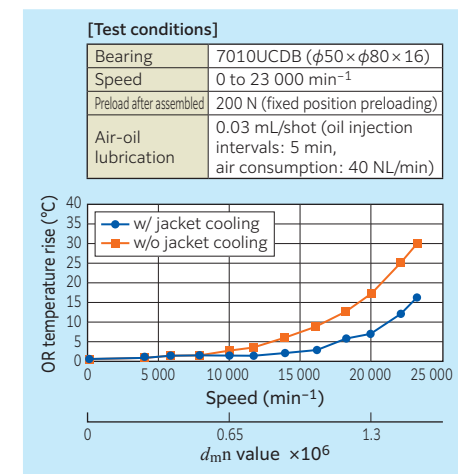


Fig. 9.23 High speed test with air-oil lubrication

Permissible speed range

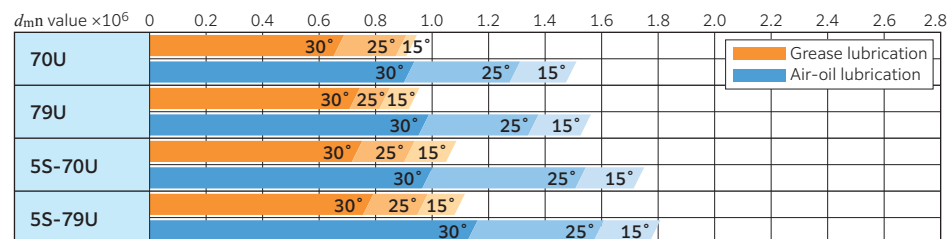

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact **NTN** Engineering for technical assistance.

9.14 ULTAGE High speed angular contact ball bearings HSE type

The HSE type employs a special material featuring greatly improved wear resistance and anti-seizure properties as well as a special surface modification technique. Furthermore, thanks to an optimized internal design, this type achieves high speed, high rigidity and high reliability.

Features

1. Adoption of special materials and a unique internal design improve anti-seizure properties (15 times better than the conventional type) and wear resistance (1/6 reduction compared the conventional type).
2. Optimized internal design enables high speed operation and high rigidity.
3. Bearings are available with either steel or ceramic balls.
4. Three contact angles (15°, 20°, and 25°) are available to handle a wide range of applications.

Bearing specification

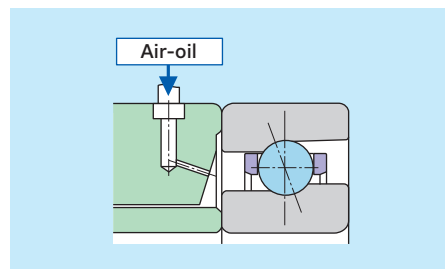


Fig. 9.24 HSE type

Data 1

The 5S-HSE type features high speed and limited temperature rise. Even if its preload is increased after assembly into the spindle, it maintains stable performance at high speeds (see Fig. 9.25).

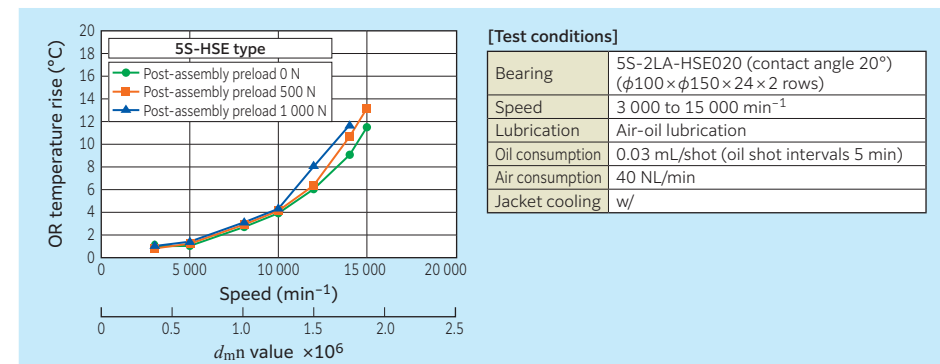


Fig. 9.25 Relationship between preload and temperature rise

Data 2

When built into a high speed main spindle, the preload of the 5S-HSE type is maintained, allowing high rigidity (1.9 times greater than a conventional bearing) (see Fig. 9.26).


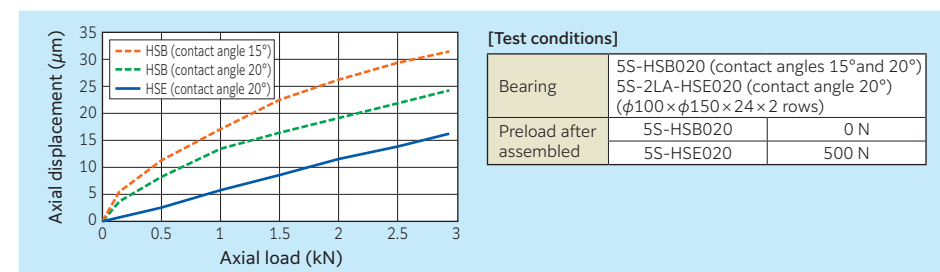


Fig. 9.26 Comparison of rigidity relative to conventional bearing (HSB type) in terms of preload after assembled

Permissible speed range

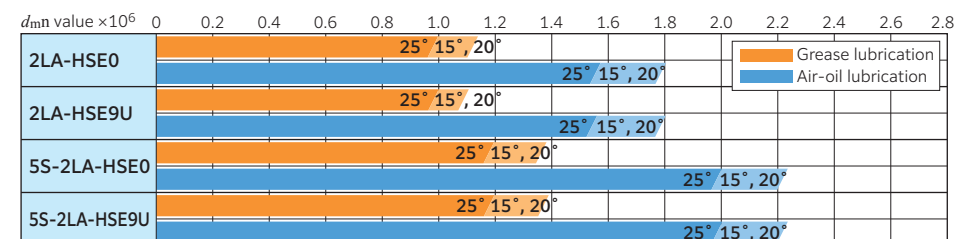

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact **NTN** Engineering for technical assistance.

9.15 **ULTAGE** Ultra high speed angular contact ball bearings HSF type

The HSF type realizes further improvement in high speed running and inhibited temperature rise by adoption of smaller diameter ceramic balls, while retaining features of the HSE type. This type attains d_{mn} values as high as 2.6×10^6 with fixed pressure preloading.

■ Features

1. Adoption of special materials and a unique internal design improve anti-seizure property (15 times better than the conventional type) and wear resistance (1/6 reduction compared the conventional type).
2. Optimized internal design enables high speed operation and high rigidity.
3. Ceramic balls are used.
4. Initial contact angle is set to 25° to accommodate the change in contact angle during ultra high speed operation.

■ Bearing specification


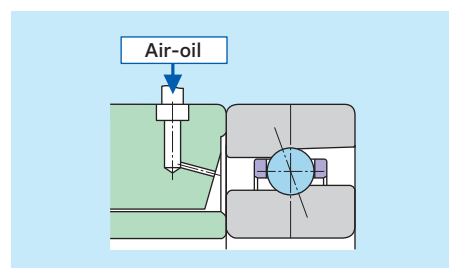


Fig. 9.27 HSF type

■ Permissible speed range



Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact **NTN** Engineering for technical assistance.

■ Low temperature rise

Ultra high speed 5S-HSF type angular contact ball bearings utilize smaller balls than those of the high speed HSE type. This reduces heating due to centrifugal force and ensures lower temperature rise. Thus, the 5S-HSF type boasts an approximately 10 % reduction in temperature rise as compared to the 5S-HSE type (see Fig. 9.28).


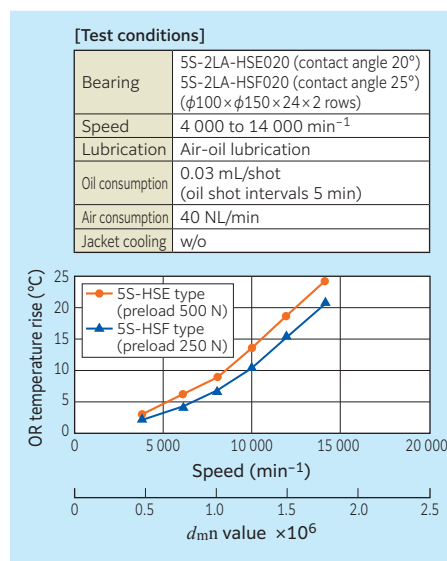


Fig. 9.28 Comparison of temperature rise

9.16 **ULTAGE** Eco-friendly air-oil lubricated angular contact ball bearings HSL type, HSFL type

The HSL/HSFL type is an advanced variation of the HSE/HSF type, characterized by incorporation of **NTN's** unique eco-conscious lubrication technology. The HSL type helps decrease oil mist emissions and consumption of air and oil, improving the working environment for machine tool operators and reducing energy consumption.

■ Bearing specification

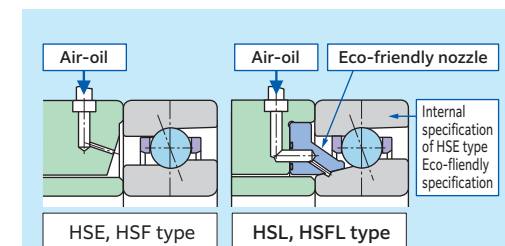


NOTE) The HSL/HSFL type is packed together with the spacer with the eco-friendly nozzle. The bearing type code HSL represents the bearing proper, while a spacer code stands for an eco-conscious nozzle proper or a spacer having a built-in nozzle. For more details, see "9.3 Bearing Designation".

■ Features

1. Adoption of special materials and a unique internal design improve anti-seizure properties (15 times better compared with the conventional type) and wear resistance (1/6 reduction compared the conventional type).
2. Ceramic balls are used.
3. Adoption of eco-friendly nozzle reduces noise (reduction of 2 to 8 dBA), air consumption (reduction of 50 to 75 %) and oil consumption (reduction of 20 to 90 %)

■ Permissible speed range

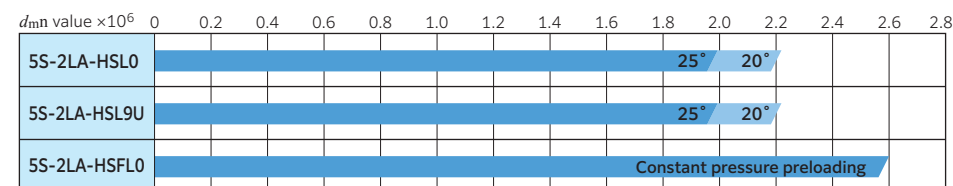

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact **NTN** Engineering for technical assistance.

Data 1

In the high speed region of $10\,000\text{ min}^{-1}$, the noise level is 6 to 8 dBA lower (see Fig. 9.30).

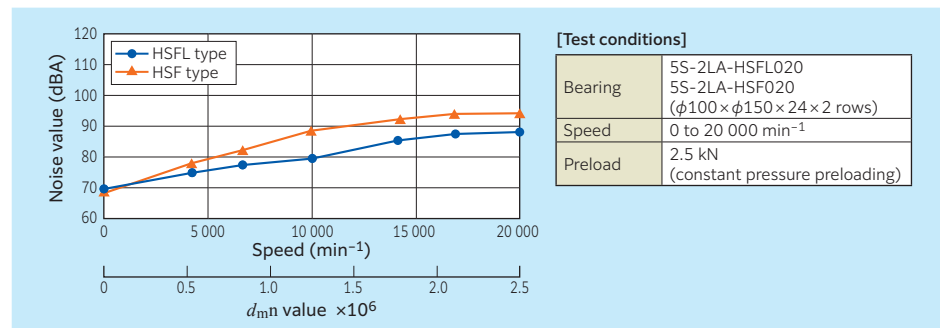


Fig. 9.30 Comparison of noise levels

Data 2

For 5S-HSFL type bearings, the temperature of the outer rings remains stable even with an air consumption as low as 10 NL/min (50 to 25 % of the recommended air consumption for standard bearings) at a speed of $21\,000\text{ min}^{-1}$ (d_{mn} value 2.6×10^6) (see Fig. 9.31).

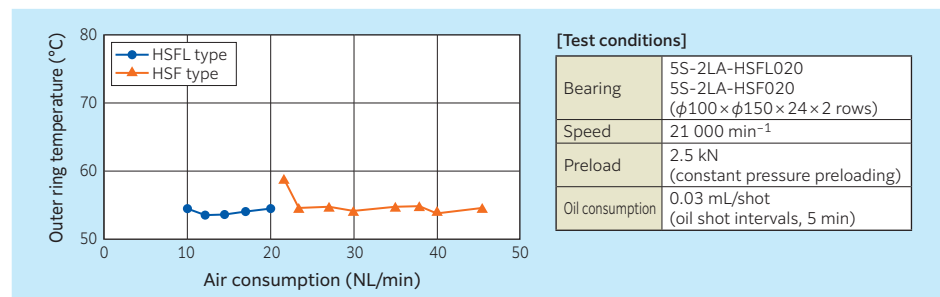


Fig. 9.31 Relationship between air consumption and temperature rise

Data 3

The 5S-HSFL type bearings can operate at $21\,000\text{ min}^{-1}$ (d_{mn} value 2.6×10^6) with oil shot intervals of 21 min (reduction of 20 to 90 % as compared with the recommended oil consumption for standard bearings) (see Fig. 9.32).

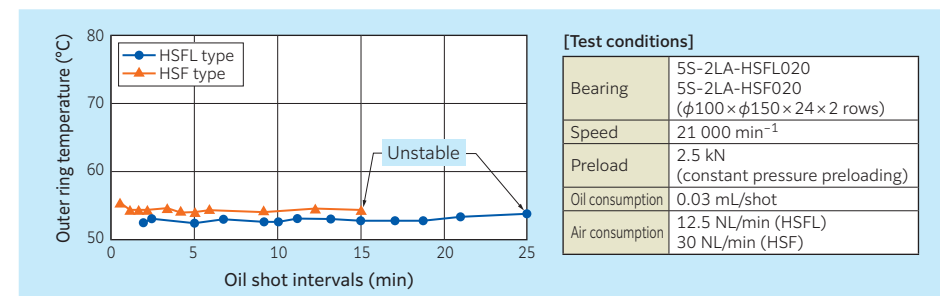


Fig. 9.32 Relationship between oil shot intervals and temperature rise

Data 4

5S-HSL type bearings can reliably run at a speed of $19\,000\text{ min}^{-1}$ (d_{mn} value 2.38×10^6) (fixed position preloading) (see Fig. 9.33) with both decrease air and oil consumption.

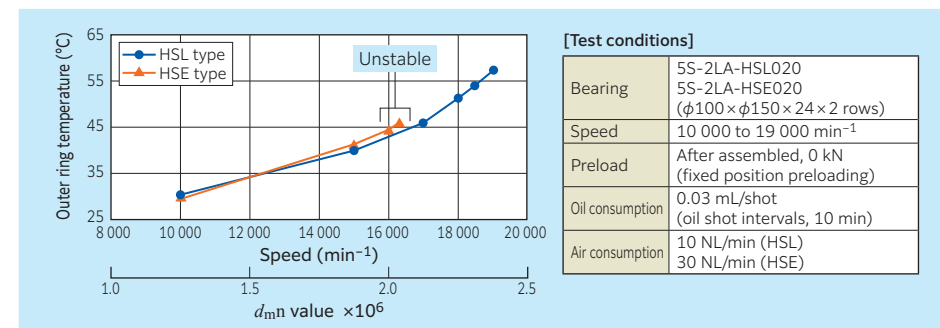


Fig. 9.33 High speed test results (fixed position preloading)

9.17 **ULTAGE** Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring, HSEW type

HSEW type is an air-oil lubricated high speed angular contact ball bearing equipped with re-lubricating holes on the outer ring of the HSE type. Because there is no requirement for providing a nozzle hole on the spacer, the spacer width can be kept short, contributing to the more compact main spindle and

improvement of spindle rigidity due to the placement of the bearings on the tool tip side.

In addition, lubrication reliability is increased due to the direct lubrication from the outer ring, enabling the reduction of air consumption and the supplied oil amount.

■ Bearing specification


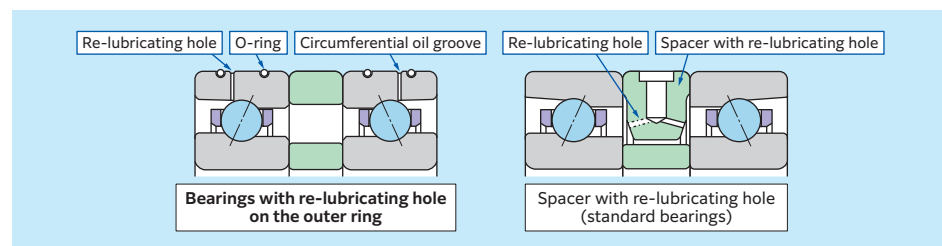


Fig. 9.34 HSEW type

■ Features

1. Compact main spindle design is possible due to the shorter spacer
2. Higher re-lubricating efficiency by the direct lubrication from the outer ring
3. Reduced noise level due to the air reduction effect

■ Permissible speed range

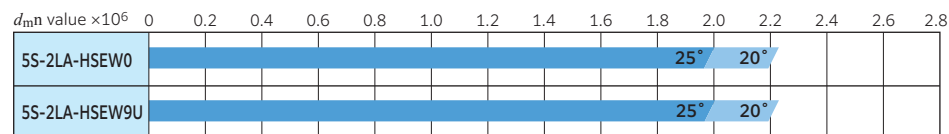

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact **NTN** Engineering for technical assistance.

■ About chamfering of re-lubricating hole on the housing

Ensure to provide chamfering on the re-lubricating hole of the housing to avoid damage of outer O-ring when the HSEW type is inserted into the housing (see Fig. 9.35).

We recommend that chamfering is only applied to the hole.

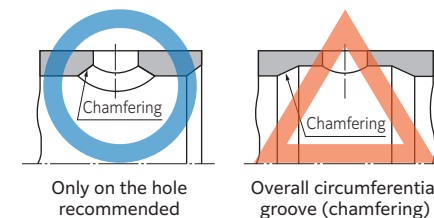


Fig. 9.35 Chamfering of re-lubricating hole on the housing

■ About phases of re-lubricating hole on the housing and re-lubricating hole on the outer ring

For producing the air reduction effect, be sure to stagger the position of re-lubricating hole on the housing and re-lubricating hole on the outer ring.

■ Data 1

For the HSEW type bearings, the temperature of the outer rings remains stable even with an air consumption as low as 20 NL/min (1/2 of the recommended air consumption for standard bearings) at a speed of 18 000 min⁻¹ (d_{mn} value 2.25×10^6) (see Fig. 9.36).

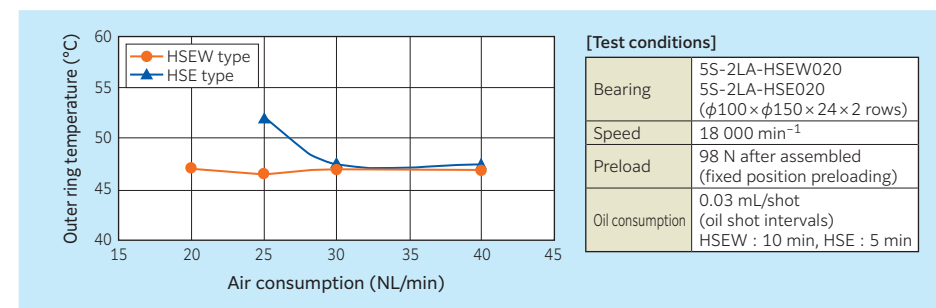


Fig. 9.36 Relationship between air consumption and temperature rise

Data 2

The HSEW type bearings can operate at $18\,000\text{ min}^{-1}$ ($d_m n$ value 2.25×10^6) with an oil shot interval of 20 min (1/4 of the recommended oil consumption for standard bearings) (see Fig. 9.37).

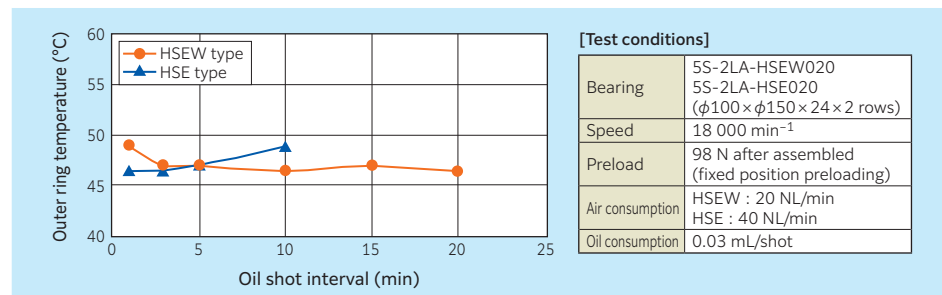


Fig. 9.37 Relationship between oil shot interval and temperature rise

Data 3

The HSEW type has achieved reduced noise level compared with the HSE type (see Fig. 9.38).

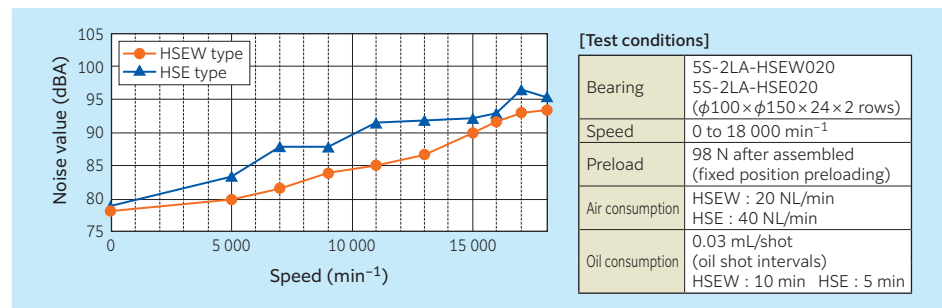


Fig. 9.38 Comparison of noise levels

9.18 ULTAGE Grease-lubricated sealed standard angular contact ball bearings 79 LLB and 70 LLB types

The 79 LLB and 70 LLB types are grease-lubricated, eco-friendly bearings that can achieve stable high speed operation with limited temperature rise.

They can allow, longer service life and preservation of healthy working environment for rotating tools with shaft diameters less than 50 mm.

Bearing specification

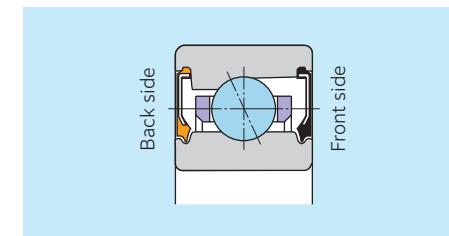


Fig. 9.39 79 LLB and 70 LLB types

Features

1. Internal design is optimized for high speed operation and limited temperature rise.
2. Longer grease life due to adoption of special grease and non-contact seals for grease retention.
3. Contact angles of 15° and 25° are available.
4. The standard types meet special precision P42 requirements (dimensional precision JIS Class 4 and running accuracy JIS Class 2).
5. Seals of different colors are used for front (black) and back (orange) sides. Bearing configuration can be easily identified by color.
6. Available with either steel or ceramic balls.

Simplified main spindle configuration

Due to the optimized internal structure, the 79 LLB and 70 LLB types can reliably run at a higher speed with grease lubrication. The grease lubricating system is virtually free from oil mist emission, and contributes to a simpler main spindle structure, reduction in environmental impact and decrease in cost (see Fig. 9.40).

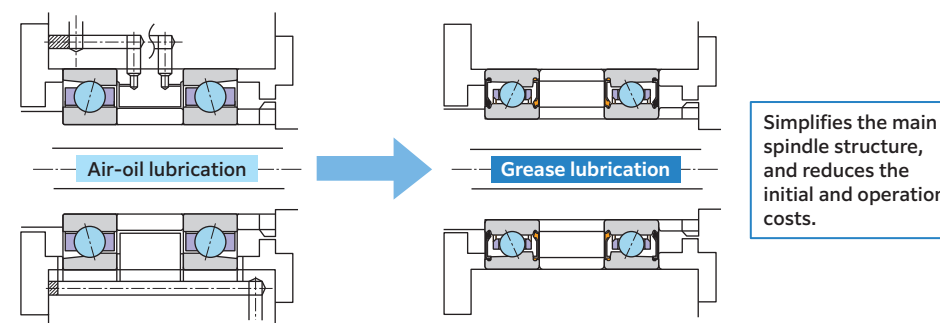




Fig. 9.40 Modification of lubrication system (air-oil lubrication to grease lubrication)

Easier handling with 79 LLB and 70 LLB types

The 79 LLB and 70 LLB types are prefilled with grease. They can be readily used after only wiping away rust preventive oil. Seals of different colors are used for the front and back

sides of the bearing. Black seals are used for the front sides and orange seals are used for the back sides, so configurations are readily identified by colors (see Table 9.26).

Table 9.26 Bearing Combinations and Seal Colors

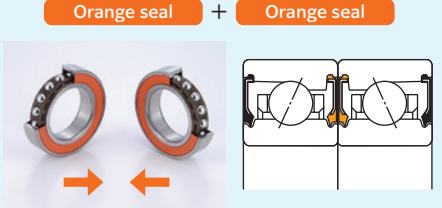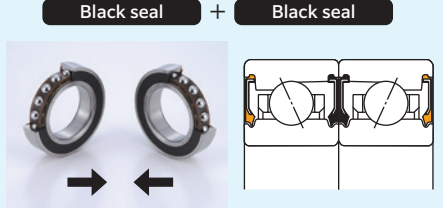DB set (back faces in combination)	DF set (front faces in combination)
	

Permissible speed range

d_{mn} value $\times 10^6$	0	0.2	0.4	0.6	0.8	1.0	1.2	1.4
70 LLB					25°	15°		
79 LLB					25°	15°		
5S-70 LLB					25°	15°		
5S-79 LLB					25°	15°		

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact NTN Engineering for technical assistance.

Data

Optimization of the internal design promotes stable operation of d_{mn} value 1.1×10^6 (see Fig. 9.41 and Fig. 9.42).

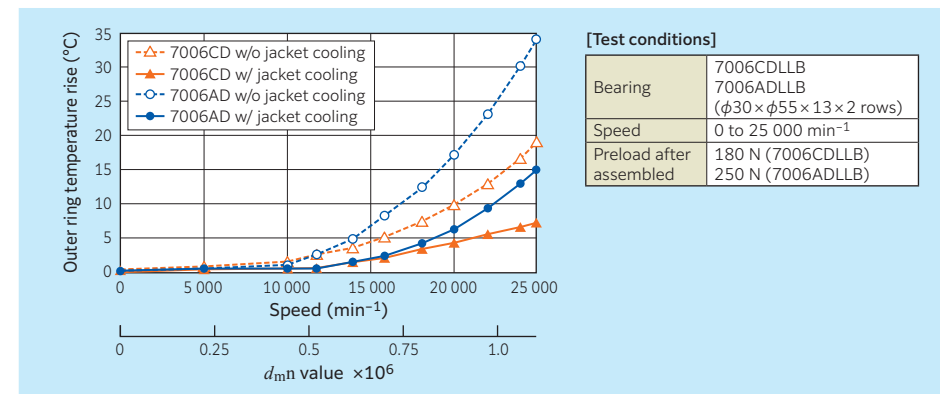


Fig. 9.41 High speed test results (Steel ball specification, contact angles 15°, 25°)

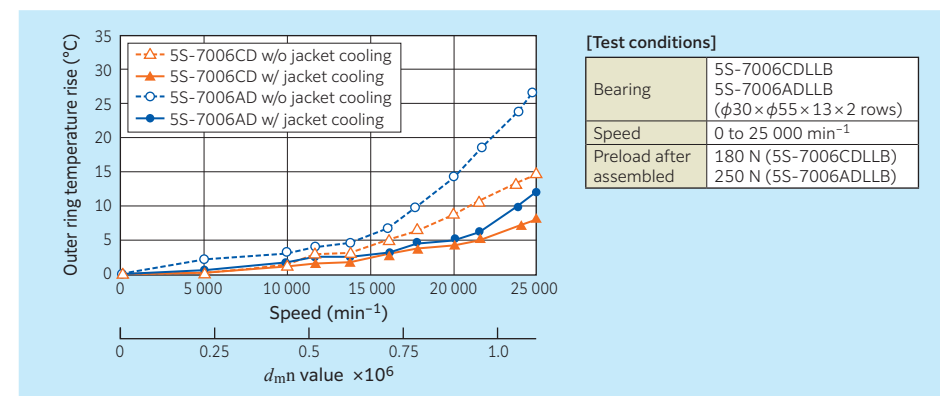


Fig. 9.42 High speed test results (Ceramic ball specification, contact angles 15°, 25°)

9.19 **ULTAGE** Grease-lubricated sealed high speed angular contact ball bearings BNS LLB type

By the optimized material and internal structure, BNS LLB type bearings have excellent performance at higher speeds. This helps to reduce pollution and cost.

Features

1. Adoption of special materials and unique internal design improve anti-seizure properties (15 times better than the conventional type) and wear resistance (1/6 reduction compared the conventional type).
2. Optimized internal design enables high speed operation and high rigidity.
3. Available with either steel or ceramic balls.
4. Adoption of grease pockets, special grease, and non-contact seals improves service life.

Bearing specification


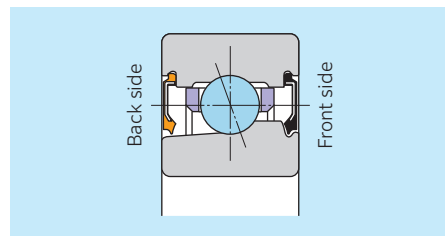


Fig. 9.43 BNS LLB type

Simplified main spindle configuration

BNS LLB type bearings can reliably operate at a higher speed with grease lubrication. The grease lubrication system is virtually free from oil mist emission can simplify the main spindle structure, reduce pollution and decrease cost (see Fig. 9.44).

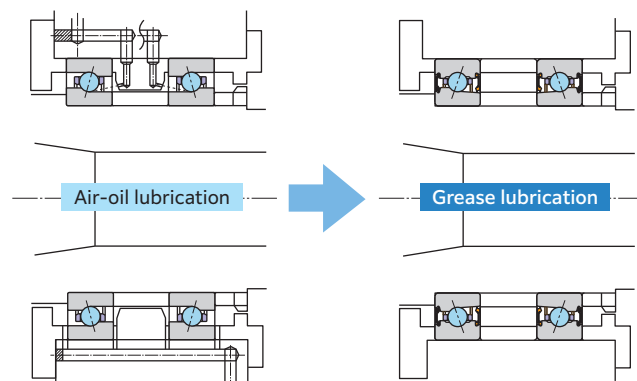

Capable of replacing air-oil lubricated bearings up to d_{mn} value of 1.4×10^6

Simplifies the main spindle structure and reduces the initial and operating costs.

Fig. 9.44 Modification of lubrication system (air-oil lubrication to grease lubrication)

Easier handling with BNS LLB type

The BNS LLB type has been packed with grease in advance. They can be used after wiping away rust preventive oil. Seals in different colors are used for the front and back

sides of the bearings. Black seals are used for the front sides and orange seals are used for the back sides, so configurations can be easily identified by color (see Table 9.27).

Table 9.27 Bearing Combinations and Seal Colors

DB set (back faces in combination)		DF set (front faces in combination)	
Orange seal + Orange seal		Black seal + Black seal	

Permissible speed range

d_{mn} value $\times 10^6$	0	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8
2LA-BNS0 LLB						25° 15°, 20°									
2LA-BNS9 LLB						25° 15°, 20°									
5S-2LA-BNS0 LLB						25° 15°, 20°									
5S-2LA-BNS9 LLB						25° 15°, 20°									

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine on which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline (for two-row arrangement), and then, contact NTN Engineering for technical assistance.

Data 1

5S-2LA-BNS LLB type bearings exhibit stable temperature rise up to a $d_m n$ value of 1.4×10^6 (see Fig. 9.45).

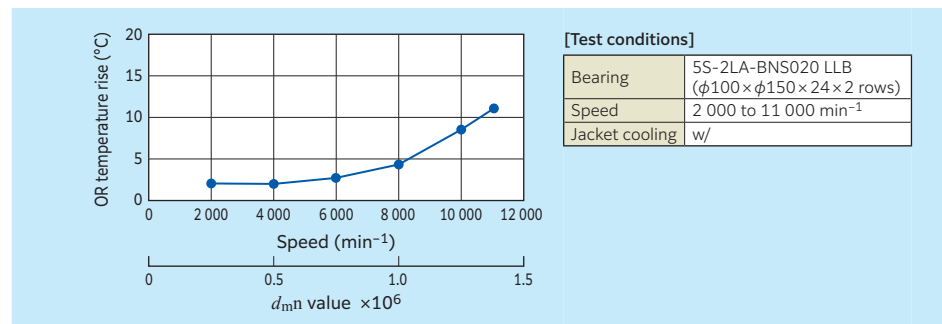


Fig. 9.45 High speed test results

Data 2

As a result of optimized design (such as grease reservoir) and special grease, 5S-2LA-BNS LLB type bearing have successfully achieved continuous operation in excess of 20 000 hours at a $d_m n$ value of 1.4×10^6 (see Fig. 9.46).

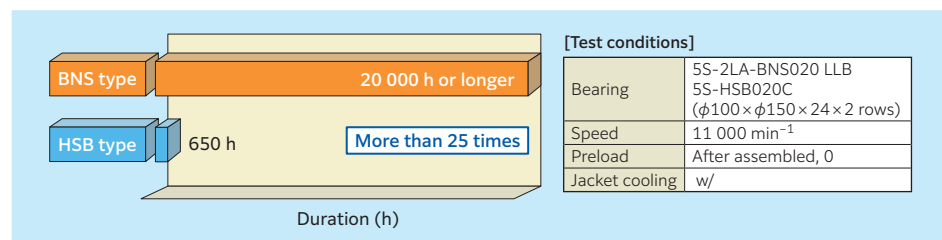



Fig. 9.46 Durability test results

Angular Contact Ball Bearings for Radial Loads

Dimension Tables

NTN

Standard angular contact ball bearings (steel ball spec.) 78 type



Contact angle 15° d 25–170 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions			Abutment and fillet dimensions					Part number
	mm					dynamic	static	dynamic	static	kN	kgf		min ⁻¹	min ⁻¹				mm	mm	mm	mm	mm	mm			
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{1s min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀		grease lubrication	oil lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>D</i> _{a max}	
7805C	25	37	7	0.3	0.15	5.60	3.85	570	390	1.04	106	16.2	27 100	36 100	7.7	0.8	0.021	28.6	33.2	34.6	27.5	34.5	35.8	0.3	0.15	7805C
7806C	30	42	7	0.3	0.15	5.95	4.50	605	460	1.20	122	16.5	23 300	31 100	8.3	1.1	0.025	33.6	38.4	39.6	32.5	39.5	40.8	0.3	0.15	7806C
7807C	35	47	7	0.3	0.15	6.40	5.25	655	535	1.41	144	16.4	20 500	27 300	9.0	1.3	0.028	38.6	43.4	44.6	37.5	44.5	45.8	0.3	0.15	7807C
7808C	40	52	7	0.3	0.15	6.70	5.75	685	585	1.57	160	16.2	18 300	24 300	9.7	1.4	0.031	43.6	48.4	49.6	42.5	49.5	50.8	0.3	0.15	7808C
7809C	45	58	7	0.3	0.15	6.95	6.25	705	640	1.73	176	16.0	16 300	21 700	10.4	1.6	0.039	49.1	53.9	55.1	47.5	55.5	56.8	0.3	0.15	7809C
7810C	50	65	7	0.3	0.15	8.70	8.05	890	820	2.31	236	16.1	14 600	19 500	11.2	1.8	0.049	54.8	60.2	61.6	52.5	62.5	63.8	0.3	0.15	7810C
7811C	55	72	9	0.3	0.15	14.5	12.7	1 470	1 300	5.55	565	16.4	13 200	17 600	13.0	3.2	0.079	60.1	66.9	69.2	57.5	69.5	70.8	0.3	0.15	7811C
7812C	60	78	10	0.3	0.15	14.9	13.6	1 520	1 390	6.00	610	16.3	12 200	16 200	14.3	3.9	0.10	65.6	72.4	74.7	62.5	75.5	76.8	0.3	0.15	7812C
7813C	65	85	10	0.6	0.3	15.6	14.9	1 590	1 520	5.30	540	16.2	11 200	14 900	15.1	4.4	0.12	71.4	78.6	80.7	69.5	80.5	82.5	0.6	0.3	7813C
7814C	70	90	10	0.6	0.3	16.0	15.8	1 630	1 610	7.10	720	16.1	10 500	14 000	15.7	5.1	0.13	76.6	83.4	85.7	74.5	85.5	87.5	0.6	0.3	7814C
7815C	75	95	10	0.6	0.3	16.4	16.7	1 670	1 700	6.00	615	16.0	9 900	13 200	16.4	5.0	0.14	81.4	88.6	90.7	79.5	90.5	92.5	0.6	0.3	7815C
7816C	80	100	10	0.6	0.3	16.8	17.6	1 710	1 790	7.95	810	15.9	9 300	12 400	17.1	5.7	0.15	86.6	93.4	95.7	84.5	95.5	97.5	0.6	0.3	7816C
7817C	85	110	13	1	0.6	24.5	24.7	2 500	2 520	10.7	1 090	16.1	8 600	11 500	19.6	9.8	0.26	93.1	101.9	104.9	90.5	104.5	105.5	1	0.6	7817C
7818C	90	115	13	1	0.6	25.2	26.1	2 570	2 670	10.5	1 070	16.1	8 200	10 900	20.3	11	0.27	98.0	107.0	109.8	95.5	109.5	110.5	1	0.6	7818C
7819C	95	120	13	1	0.6	25.9	27.6	2 640	2 820	12.1	1 240	16.0	7 800	10 400	20.9	11	0.28	103.1	111.9	114.8	100.5	114.5	115.5	1	0.6	7819C
7820C	100	125	13	1	0.6	26.1	28.3	2 660	2 890	12.5	1 270	16.0	7 500	10 000	21.6	12	0.30	108.1	116.9	119.8	105.5	119.5	120.5	1	0.6	7820C
7821C	105	130	13	1	0.6	26.7	29.8	2 720	3 050	13.2	1 340	15.9	7 100	9 500	22.3	13	0.31	113.1	122.0	124.8	110.5	124.5	125.5	1	0.6	7821C
7822C	110	140	16	1	0.6	38.5	42.5	3 900	4 350	21.0	2 140	16.1	6 700	9 000	24.8	19	0.49	119.8	130.2	134.0	115.5	134.5	135.5	1	0.6	7822C
7824C	120	150	16	1	0.6	39.0	44.5	3 950	4 550	22.1	2 260	16.0	6 200	8 300	26.1	20	0.52	129.8	140.2	144.0	125.5	144.5	145.5	1	0.6	7824C
7826C	130	165	18	1.1	0.6	52.0	59.5	5 300	6 050	28.4	2 900	16.1	5 700	7 600	28.8	28	0.91	141.3	153.7	158.1	137	158	160.5	1	0.6	7826C
7828C	140	175	18	1.1	0.6	53.0	62.5	5 400	6 350	30.0	3 050	16.0	5 300	7 100	30.1	30	0.97	151.3	163.7	168.1	147	168	170.5	1	0.6	7828C
7830C	150	190	20	1.1	0.6	67.0	79.5	6 850	8 100	48.5	4 950	16.1	4 900	6 600	32.8	45	1.33	163.4	177.1	182.2	157	183	185.5	1	0.6	7830C
7832C	160	200	20	1.1	0.6	68.5	83.5	7 000	8 500	41.0	4 200	16.0	4 700	6 200	34.2	46	1.41	172.9	187.1	192.2	167	193	195.5	1	0.6	7832C
7834C	170	215	22	1.1	0.6	84.0	102	8 550	10 400	49.0	4 950	16.1	4 400	5 800	36.8	53	1.87	184.4	200.6	206.3	177	208	210.5	1	0.6	7834C

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension Tables

NTN

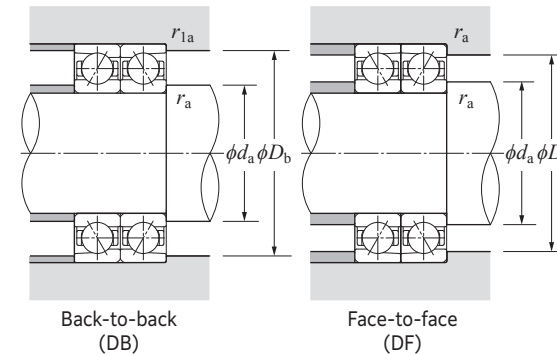

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$


$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38				1.47			1.65	2.39
0.357	0.4				1.4			1.57	2.28
0.714	0.43				1.3			1.46	2.11
1.07	0.46				1.23			1.38	2
1.43	0.47				1.19			1.34	1.93
2.14	0.5	1	0	0.44	1	1	0.72	1.26	1.82
3.57	0.55				1.02			1.14	1.66
5.35	0.56				1			1.12	1.63
7.14	0.56				1			1.12	1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.


ULTAGE Standard angular contact ball bearings (steel ball spec.)
79U type / 79 type

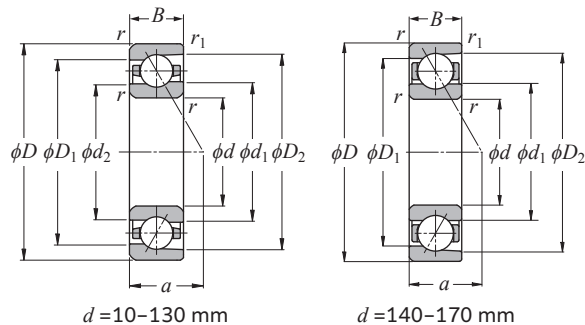

Contact angle 15° d 10–170 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					Part number		
	mm						dynamic	static	dynamic	static	kN	kgf		min ⁻¹	grease				oil	mm	mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{is}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	<i>f₀</i>	lubrication		lubrication	<i>a</i>				Single-row (approx.)	Single-row (approx.)	<i>d₁</i>	<i>d₂</i>	<i>D₁</i>	<i>D₂</i>	<i>d_a</i> min	<i>D_a</i> max	<i>D_b</i> max		<i>r_{as}</i> max	<i>r_{las}</i> max
7900UC	10	22	6	0.3	0.15	3.55	1.65	360	169	2.40	245	14.2	73 200	117 200	5.2	0.4	0.01	14.3	13.5	17.7	19.4	12.5	19.5	20.8	0.3	0.15	7900UC			
7901UC	12	24	6	0.3	0.15	3.70	1.86	380	189	2.61	267	14.7	65 100	104 100	5.4	0.4	0.01	16.3	15.5	19.7	21.3	14.5	21.5	22.8	0.3	0.15	7901UC			
7902UC	15	28	7	0.3	0.15	5.65	2.90	575	296	3.85	395	14.4	54 500	87 200	6.4	0.8	0.02	19.3	18.3	23.7	25.6	17.5	25.5	26.8	0.3	0.15	7902UC			
7903UC	17	30	7	0.3	0.15	5.90	3.20	605	325	4.15	425	14.8	49 900	79 800	6.7	0.8	0.02	21.3	20.3	25.7	27.8	19.5	27.5	28.8	0.3	0.15	7903UC			
7904UC	20	37	9	0.3	0.15	8.45	4.90	865	500	6.45	655	14.9	41 100	65 800	8.3	1.5	0.04	25.9	24.7	31.1	33.6	22.5	34.5	35.8	0.3	0.15	7904UC			
7905UC	25	42	9	0.3	0.15	9.05	5.75	925	590	7.35	750	15.5	35 000	56 000	9.0	1.8	0.04	30.9	29.7	36.1	38.6	27.5	39.5	40.8	0.3	0.15	7905UC			
7906UC	30	47	9	0.3	0.15	9.55	6.60	975	675	8.20	840	15.9	30 400	48 700	9.7	2.0	0.05	35.9	34.7	41.1	43.6	32.5	44.5	45.8	0.3	0.15	7906UC			
7907UC	35	55	10	0.6	0.3	15.2	10.3	1 550	1 050	13.7	1 400	15.5	26 000	41 700	11.1	3.4	0.07	41.6	39.9	48.4	51.7	39.5	50.5	52.5	0.6	0.3	7907UC			
7908UC	40	62	12	0.6	0.3	16.0	11.8	1 640	1 200	15.4	1 570	15.9	23 000	36 800	12.9	4.7	0.11	47.6	45.9	54.4	57.8	44.5	57.5	59.5	0.6	0.3	7908UC			
7909UC	45	68	12	0.6	0.3	19.9	14.8	2 030	1 510	19.4	1 980	15.8	20 700	33 200	13.6	5.9	0.12	52.7	50.8	60.4	64.1	49.5	63.5	65.5	0.6	0.3	7909UC			
7910UC	50	72	12	0.6	0.3	21.0	16.6	2 140	1 700	21.4	2 190	16.1	19 200	30 700	14.2	6.2	0.13	57.2	55.3	64.9	68.6	54.5	67.5	69.5	0.6	0.3	7910UC			
7911UC	55	80	13	1	0.6	21.8	18.5	2 230	1 890	23.4	2 390	16.3	17 400	27 800	15.6	7.5	0.18	63.7	61.8	71.4	75.1	60.5	74.5	75.5	1	0.6	7911UC			
7912UC	60	85	13	1	0.6	22.7	20.3	2 320	2 080	25.5	2 600	16.5	16 200	25 900	16.3	8.0	0.19	68.7	66.8	76.4	80.1	65.5	79.5	80.5	1	0.6	7912UC			
7913UC	65	90	13	1	0.6	23.0	21.2	2 350	2 160	26.5	2 700	16.5	15 100	24 200	16.9	8.6	0.21	73.7	71.8	81.4	85.1	70.5	84.5	85.5	1	0.6	7913UC			
7914UC	70	100	16	1	0.6	33.0	30.0	3 350	3 100	38.0	3 850	16.4	13 800	22 100	19.4	14	0.34	80.3	78.0	89.7	94.3	75.5	94.5	95.5	1	0.6	7914UC			
7915UC	75	105	16	1	0.6	33.5	31.5	3 400	3 250	39.5	4 000	16.5	13 000	20 800	20.1	15	0.36	85.3	83.0	94.7	99.3	80.5	99.5	100.5	1	0.6	7915UC			
7916UC	80	110	16	1	0.6	34.0	33.0	3 450	3 350	41.0	4 200	16.5	12 300	19 600	20.8	16	0.38	90.8	88.5	100.2	104.8	85.5	104.5	105.5	1	0.6	7916UC			
7917UC	85	120	18	1.1	0.6	45.5	44.0	4 650	4 500	54.0	5 500	16.5	11 400	18 300	22.8	22	0.54	96.9	94.3	108.1	113.4	92	113	115.5	1	0.6	7917UC			
7918UC	90	125	18	1.1	0.6	46.0	46.0	4 700	4 700	56.0	5 700	16.6	10 900	17 400	23.5	23	0.56	101.9	99.3	113.1	118.4	97	118	120.5	1	0.6	7918UC			
7919UC	95	130	18	1.1	0.6	47.0	47.5	4 750	4 850	58.0	5 950	16.5	10 400	16 700	24.1	24	0.59	106.9	104.3	118.1	123.4	102	123	125.5	1	0.6	7919UC			
7920UC	100	140	20	1.1	0.6	60.0	61.0	6 150	6 200	76.5	7 800	16.5	9 800	15 600	26.1	33	0.81	113.6	110.5	126.4	132.6	107	133	135.5	1	0.6	7920UC			
7921UC	105	145	20	1.1	0.6	61.0	63.5	6 250	6 500	79.5	8 100	16.6	9 400	15 000	26.8	34	0.84	118.6	115.5	131.4	137.6	112	138	140.5	1	0.6	7921UC			
7922UC	110	150	20	1.1	0.6	62.0	65.5	6 300	6 700	82.5	8 400	16.5	9 000	14 400	27.5	36	0.87	123.6	120.5	136.4	142.6	117	143	145.5	1	0.6	7922UC			
7924UC	120	165	22	1.1	0.6	76.5	81.5	7 800	8 300	100	10 200	16.6	8 200	13 200	30.2	48	1.19	135.2	131.7	149.8	156.7	127	158	160.5	1	0.6	7924UC			
7926UC	130	180	24	1.5	1	94.0	102	9 600	10 400	128	13 000	16.5	7 600	12 100	32.9	63	1.57	146.9	143.0	163.2	170.9	138.5	171.5	174.5	1.5	1	7926UC			
7928CT1B	140	190	24	1.5	1	92.5	101	9 450	10 300	48.0	4 900	16.5	5 100	6 600	34.2	67	1.66	156.0	—	174.1	180.5	148.5	181.5	184.5	1.5	1	7928CT1B			
7930CT1B	150	210	28	2	1	119	132	12 200	13 400	60.5	6 200	16.5	4 700	6 100	38.2	100	2.59	169.5	—	190.5	198.0	160	200	204.5	2	1	7930CT1B			
7932CT1B	160	220	28	2	1	121	136	12 300	13 900	63.0	6 400	16.5	4 400	5 700	39.6	106	2.72	179.5	—	200.6	208.0	170	210	214.5	2	1	7932CT1B			
7934CT1B	170	230	28	2	1	125	145	12 700	14 800	79.0	8 050	16.4	4 200	5 400	40.9	109	2.89	190.0	—	210.5	218.0	180	220	224.5	2	1	7934CT1B			

1) Minimum allowable value for corner radius dimension r or r_1 .
Remarks: A part number containing a suffix **U** means an **ULTAGE™** series.
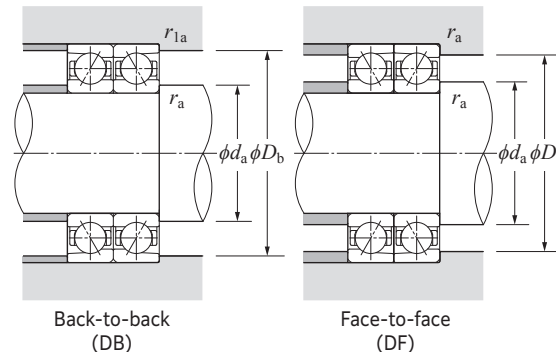
$$P_r = XF_r + YF_a$$


Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$

i :for F_a	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.38					1.47		1.65		2.35
0.357	0.4					1.4		1.57		2.28
0.714	0.43					1.3		1.46		2.11
1.07	0.46					1.23		1.38		2
1.43	0.47					1.19	1	1.34	0.72	1.93
2.14	0.5	1	0	0.44		1.12		1.26		1.82
3.57	0.55					1.02		1.14		1.66
5.35	0.56					1		1.12		1.63
7.14	0.56					1		1.12		1.63

Static equivalent radial load


$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (steel ball spec.)
79U type



Contact angle 25° d 10–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static												kN	kgf	mm	mm	mm	
	mm					kN	kgf	kgf	kgf	mm	mm	mm	mm				mm	mm	mm	mm	mm	mm	mm			
	d	D	B	$r_{s \min}^{(1)}$	$r_{ls \min}^{(1)}$	C_r	C_{0r}	C_r	C_{0r}	(static)	grease lubrication	oil lubrication	a				Single-row (approx.)	Single-row (approx.)	d_1	d_2	D_1	D_2	d_a min	D_a max	D_b max	
7900UAD	10	22	6	0.3	0.15	3.40	1.58	345	161	1.77	180	63 400	102 500	6.8	0.4	0.01	14.3	13.5	17.7	19.4	12.5	19.5	20.8	0.3	0.15	7900UAD
7901UAD	12	24	6	0.3	0.15	3.55	1.77	360	181	1.92	196	56 400	91 100	7.2	0.4	0.01	16.3	15.5	19.7	21.3	14.5	21.5	22.8	0.3	0.15	7901UAD
7902UAD	15	28	7	0.3	0.15	5.40	2.77	550	283	2.81	287	47 200	76 300	8.6	0.8	0.02	19.3	18.3	23.7	25.6	17.5	25.5	26.8	0.3	0.15	7902UAD
7903UAD	17	30	7	0.3	0.15	5.60	3.05	575	310	3.00	310	43 200	69 800	9.0	0.8	0.02	21.3	20.3	25.7	27.7	19.5	27.5	28.8	0.3	0.15	7903UAD
7904UAD	20	37	9	0.3	0.15	8.05	4.65	820	475	4.70	480	35 600	57 500	11.2	1.5	0.04	25.9	24.7	31.1	33.6	22.5	34.5	35.8	0.3	0.15	7904UAD
7905UAD	25	42	9	0.3	0.15	8.60	5.50	875	560	5.35	545	30 300	49 000	12.4	1.8	0.04	30.9	29.7	36.1	38.6	27.5	39.5	40.8	0.3	0.15	7905UAD
7906UAD	30	47	9	0.3	0.15	9.00	6.30	920	640	6.00	610	26 400	42 600	13.5	2.0	0.05	35.9	34.7	41.1	43.6	32.5	44.5	45.8	0.3	0.15	7906UAD
7907UAD	35	55	10	0.6	0.3	14.4	9.75	1 470	995	10.1	1 030	22 600	36 400	15.6	3.4	0.07	41.6	39.9	48.4	51.7	39.5	50.5	52.5	0.6	0.3	7907UAD
7908UAD	40	62	12	0.6	0.3	15.2	11.2	1 550	1 140	11.3	1 160	19 900	32 200	18.0	4.7	0.11	47.6	45.9	54.4	57.8	44.5	57.5	59.5	0.6	0.3	7908UAD
7909UAD	45	68	12	0.6	0.3	18.8	14.1	1 920	1 440	14.6	1 490	18 000	29 000	19.2	5.9	0.12	52.7	50.8	60.4	64.0	49.5	63.5	65.5	0.6	0.3	7909UAD
7910UAD	50	72	12	0.6	0.3	19.8	15.8	2 020	1 610	16.2	1 650	16 600	26 900	20.3	6.2	0.13	57.2	55.3	64.9	68.5	54.5	67.5	69.5	0.6	0.3	7910UAD
7911UAD	55	80	13	1	0.6	20.6	17.5	2 100	1 790	17.7	1 800	15 000	24 300	22.3	7.5	0.18	63.7	61.8	71.4	75.1	60.5	74.5	75.5	1	0.6	7911UAD
7912UAD	60	85	13	1	0.6	21.4	19.1	2 190	1 950	19.2	1 960	14 000	22 600	23.5	8.0	0.19	68.7	66.8	76.4	80.1	65.5	79.5	80.5	1	0.6	7912UAD
7913UAD	65	90	13	1	0.6	21.7	19.7	2 210	2 010	19.9	2 030	13 100	21 200	24.6	8.6	0.21	73.7	71.8	81.4	85.0	70.5	84.5	85.5	1	0.6	7913UAD
7914UAD	70	100	16	1	0.6	31.0	28.6	3 150	2 920	27.9	2 840	11 900	19 300	27.9	14	0.34	80.3	78.0	89.7	94.3	75.5	94.5	95.5	1	0.6	7914UAD
7915UAD	75	105	16	1	0.6	31.5	29.6	3 200	3 000	29.0	2 960	11 300	18 200	29.1	15	0.36	85.3	83.0	94.7	99.2	80.5	99.5	100.5	1	0.6	7915UAD
7916UAD	80	110	16	1	0.6	32.0	30.5	3 250	3 100	30.0	3 050	10 600	17 200	30.4	16	0.38	90.8	88.5	100.2	104.7	85.5	104.5	105.5	1	0.6	7916UAD
7917UAD	85	120	18	1.1	0.6	43.0	41.5	4 350	4 250	39.5	4 000	9 900	16 000	33.0	22	0.54	96.9	94.3	108.1	113.4	92	113	115.5	1	0.6	7917UAD
7918UAD	90	125	18	1.1	0.6	43.5	43.0	4 450	4 400	41.0	4 200	9 400	15 300	34.2	23	0.56	101.9	99.3	113.1	118.4	97	118	120.5	1	0.6	7918UAD
7919UAD	95	130	18	1.1	0.6	44.0	44.5	4 500	4 500	42.5	4 350	9 000	14 600	35.3	24	0.59	106.9	104.3	118.1	123.4	102	123	125.5	1	0.6	7919UAD
7920UAD	100	140	20	1.1	0.6	56.5	57.5	5 800	5 850	56.0	5 750	8 500	13 700	38.1	33	0.81	113.6	110.5	126.4	132.5	107	133	135.5	1	0.6	7920UAD
7921UAD	105	145	20	1.1	0.6	57.5	59.0	5 850	6 050	58.5	5 950	8 100	13 100	39.3	34	0.84	118.6	115.5	131.4	137.5	112	138	140.5	1	0.6	7921UAD
7922UAD	110	150	20	1.1	0.6	58.5	61.0	5 950	6 250	60.5	6 150	7 800	12 600	40.4	36	0.87	123.6	120.5	136.4	142.5	117	143	145.5	1	0.6	7922UAD
7924UAD	120	165	22	1.1	0.6	72.0	76.0	7 350	7 750	73.5	7 500	7 100	11 500	44.4	48	1.19	135.2	131.7	149.8	156.7	127	158	160.5	1	0.6	7924UAD
7926UAD	130	180	24	1.5	1	88.5	95.0	9 050	9 700	94.0	9 550	6 600	10 600	48.3	63	1.57	146.9	143.0	163.2	170.8	138.5	171.5	174.5	1.5	1	7926UAD

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads


Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$P_{0r} = X_0 F_r + Y_0 F_a$				Back-to-back / Face-to-face	
Single row / Tandem		Back-to-back / Face-to-face			
X_0	Y_0	X_0	Y_0		
0.5	0.38	1	0.76		

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

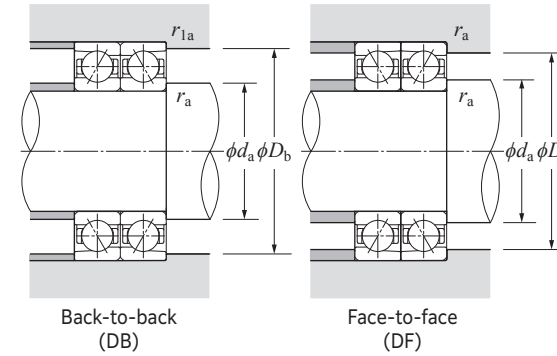


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (steel ball spec.)
79U type



Contact angle 30° d 10–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static																	
	mm					kN	kgf	grease	oil	mm	cm ³	kg	mm				mm									
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{ls min} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	lubrication	lubrication	<i>a</i>				Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>D</i> _{a max}	<i>D</i> _{b max}	
7900U	10	22	6	0.3	0.15	3.25	1.53	335	156	1.36	139	53 700	73 200	7.7	0.4	0.01	14.3	13.5	17.7	19.3	12.5	19.5	20.8	0.3	0.15	7900U
7901U	12	24	6	0.3	0.15	3.40	1.71	350	175	1.48	151	47 700	65 000	8.2	0.4	0.01	16.3	15.5	19.7	21.3	14.5	21.5	22.8	0.3	0.15	7901U
7902U	15	28	7	0.3	0.15	5.20	2.68	530	274	2.14	218	40 000	54 500	9.8	0.8	0.02	19.3	18.3	23.7	25.6	17.5	25.5	26.8	0.3	0.15	7902U
7903U	17	30	7	0.3	0.15	5.40	2.95	555	300	2.29	234	36 600	49 800	10.3	0.8	0.02	21.3	20.3	25.7	27.7	19.5	27.5	28.8	0.3	0.15	7903U
7904U	20	37	9	0.3	0.15	7.75	4.50	790	460	3.60	365	30 100	41 100	12.8	1.5	0.04	25.9	24.7	31.1	33.5	22.5	34.5	35.8	0.3	0.15	7904U
7905U	25	42	9	0.3	0.15	8.25	5.30	840	540	4.10	415	25 600	35 000	14.2	1.8	0.04	30.9	29.7	36.1	38.5	27.5	39.5	40.8	0.3	0.15	7905U
7906U	30	47	9	0.3	0.15	8.65	6.05	885	615	4.60	465	22 300	30 400	15.7	2.0	0.05	35.9	34.7	41.1	43.5	32.5	44.5	45.8	0.3	0.15	7906U
7907U	35	55	10	0.6	0.3	13.8	9.40	1 410	960	7.85	800	19 100	26 000	18.1	3.4	0.07	41.6	39.9	48.4	51.6	39.5	50.5	52.5	0.6	0.3	7907U
7908U	40	62	12	0.6	0.3	14.6	10.7	1 490	1 100	8.75	895	16 900	23 000	20.8	4.7	0.11	47.6	45.9	54.4	57.7	44.5	57.5	59.5	0.6	0.3	7908U
7909U	45	68	12	0.6	0.3	18.1	13.6	1 840	1 380	11.4	1 160	15 200	20 700	22.4	5.9	0.12	52.7	50.8	60.4	64.0	49.5	63.5	65.5	0.6	0.3	7909U
7910U	50	72	12	0.6	0.3	19.0	15.2	1 940	1 550	12.6	1 280	14 100	19 200	23.7	6.2	0.13	57.2	55.3	64.9	68.5	54.5	67.5	69.5	0.6	0.3	7910U
7911U	55	80	13	1	0.6	19.8	16.8	2 020	1 720	13.8	1 410	12 700	17 400	26.1	7.5	0.18	63.7	61.8	71.4	75.0	60.5	74.5	75.5	1	0.6	7911U
7912U	60	85	13	1	0.6	20.6	18.2	2 100	1 850	15.0	1 530	11 900	16 200	27.5	8.0	0.19	68.7	66.8	76.4	80.0	65.5	79.5	80.5	1	0.6	7912U
7913U	65	90	13	1	0.6	20.8	18.8	2 120	1 910	15.6	1 590	11 100	15 100	29.0	8.6	0.21	73.7	71.8	81.4	85.0	70.5	84.5	85.5	1	0.6	7913U
7914U	70	100	16	1	0.6	29.8	27.3	3 050	2 780	21.5	2 190	10 100	13 800	32.6	14	0.34	80.3	78.0	89.7	94.2	75.5	94.5	95.5	1	0.6	7914U
7915U	75	105	16	1	0.6	30.0	28.2	3 100	2 870	22.3	2 280	9 600	13 000	34.1	15	0.36	85.3	83.0	94.7	99.2	80.5	99.5	100.5	1	0.6	7915U
7916U	80	110	16	1	0.6	30.5	29.1	3 100	2 970	23.2	2 370	9 000	12 300	35.7	16	0.38	90.8	88.5	100.2	104.7	85.5	104.5	105.5	1	0.6	7916U
7917U	85	120	18	1.1	0.6	41.0	39.5	4 200	4 050	30.5	3 100	8 400	11 400	38.7	22	0.54	96.9	94.3	108.1	113.4	92	113	115.5	1	0.6	7917U
7918U	90	125	18	1.1	0.6	41.5	41.0	4 250	4 150	31.5	3 200	8 000	10 900	40.2	23	0.56	101.9	99.3	113.1	118.3	97	118	120.5	1	0.6	7918U
7919U	95	130	18	1.1	0.6	42.5	42.0	4 300	4 300	32.5	3 350	7 600	10 400	41.6	24	0.59	106.9	104.3	118.1	123.3	102	123	125.5	1	0.6	7919U
7920U	100	140	20	1.1	0.6	54.5	54.5	5 550	5 550	43.5	4 450	7 200	9 800	44.8	33	0.81	113.6	110.5	126.4	132.5	107	133	135.5	1	0.6	7920U
7921U	105	145	20	1.1	0.6	55.0	56.5	5 650	5 750	45.0	4 600	6 900	9 400	46.2	34	0.84	118.6	115.5	131.4	137.5	112	138	140.5	1	0.6	7921U
7922U	110	150	20	1.1	0.6	56.0	58.0	5 700	5 900	46.5	4 750	6 600	9 000	47.7	36	0.87	123.6	120.5	136.4	142.5	117	143	145.5	1	0.6	7922U
7924U	120	165	22	1.1	0.6	69.0	72.5	7 050	7 350	56.5	5 750	6 000	8 200	52.3	48	1.19	135.2	131.7	149.8	156.6	127	158	160.5	1	0.6	7924U
7926U	130	180	24	1.5	1	85.0	90.5	8 650	9 250	72.5	7 400	5 500	7 600	56.9	63	1.57	146.9	143.0	163.2	170.8	138.5	171.5	174.5	1.5	1	7926U

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.8	1	0	0.39	0.76	1	0.78	0.63	1.24

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.33		1	0.66

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

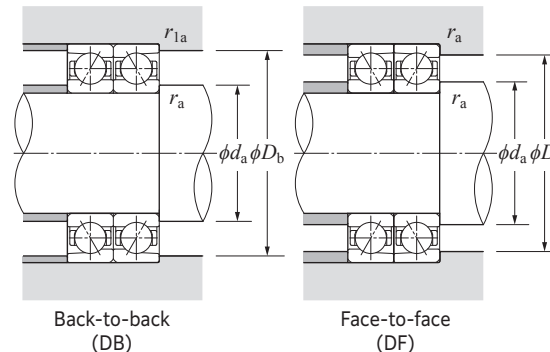


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (steel ball spec.)
70U type / 70 type

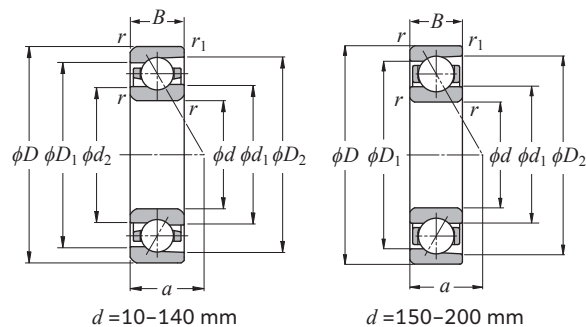

Contact angle 15° d 10-200 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					Part number		
	mm					dynamic kN	static kgf	dynamic kN	static kgf	kN	kgf		min ⁻¹	grease lubrication				oil lubrication	mm				d_a mm	D_a mm	D_b mm	r_{as} mm		r_{1as} mm	
	d	D	B	$r_{s\min}^{(1)}$	$r_{1s\min}^{(1)}$	C_r	C_{0r}	C_r	C_{0r}	(static)	f_0							a	Single-row (approx.)	Single-row (approx.)	d_1	d_2	D_1	D_2	d_a min	D_a max		D_b max	r_{as} max
7000UC	10	26	8	0.3	0.15	5.90	2.48	600	253	3.80	390	12.6	65	800	105	300	6.4	0.9	0.019	15.2	14.0	20.4	22.7	12.5	23.5	24.8	0.3	0.15	7000UC
7001UC	12	28	8	0.3	0.15	6.45	2.93	655	299	4.25	435	13.4	57	100	91	400	6.8	1.0	0.021	17.9	16.7	23.1	25.4	14.5	25.5	26.8	0.3	0.15	7001UC
7002UC	15	32	9	0.3	0.15	7.35	3.70	750	375	5.15	525	14.1	49	900	79	800	7.7	1.3	0.030	20.9	19.7	26.1	28.5	17.5	29.5	30.8	0.3	0.15	7002UC
7003UC	17	35	10	0.3	0.15	9.10	4.55	930	460	6.60	670	13.8	45	100	72	100	8.5	1.8	0.037	23.0	21.6	29.0	32.0	19.5	32.5	33.8	0.3	0.15	7003UC
7004UC	20	42	12	0.6	0.3	12.3	6.60	1250	670	9.60	980	14.1	37	200	59	500	10.3	2.9	0.067	28.1	26.4	34.9	38.4	24.5	37.5	39.5	0.6	0.3	7004UC
7005UC	25	47	12	0.6	0.3	13.6	8.00	1390	815	11.3	1150	14.7	32	500	52	100	10.9	3.3	0.079	32.6	30.9	39.4	42.9	29.5	42.5	44.5	0.6	0.3	7005UC
7006UC	30	55	13	1	0.6	17.5	11.0	1790	1120	15.4	1570	14.9	27	200	43	600	12.3	4.8	0.11	39.2	37.3	46.9	50.6	35.5	49.5	50.5	1	0.6	7006UC
7007UC	35	62	14	1	0.6	22.1	14.6	2260	1490	19.5	1990	15.0	24	200	38	700	13.5	6.3	0.15	44.2	42.2	52.8	57.0	40.5	56.5	57.5	1	0.6	7007UC
7008UC	40	68	15	1	0.6	23.7	16.8	2410	1720	22.0	2250	15.4	21	700	34	700	14.8	7.4	0.19	49.7	47.7	58.3	62.5	45.5	62.5	63.5	1	0.6	7008UC
7009UC	45	75	16	1	0.6	28.1	20.4	2860	2080	27.1	2770	15.4	19	500	31	200	16.1	9.4	0.24	55.3	53.0	64.7	69.3	50.5	69.5	70.5	1	0.6	7009UC
7010UC	50	80	16	1	0.6	29.8	23.1	3050	2350	30.0	3100	15.7	18	000	28	800	16.8	11	0.26	60.3	58.0	69.7	74.3	55.5	74.5	75.5	1	0.6	7010UC
7011UC	55	90	18	1.1	0.6	39.0	30.0	4000	3100	39.0	4000	15.5	16	200	25	900	18.8	16	0.38	66.9	64.3	78.1	83.5	62	83	85.5	1	0.6	7011UC
7012UC	60	95	18	1.1	0.6	40.0	32.5	4100	3300	41.5	4200	15.7	15	100	24	200	19.4	17	0.41	71.9	69.3	83.1	88.5	67	88	90.5	1	0.6	7012UC
7013UC	65	100	18	1.1	0.6	42.5	36.0	4300	3650	45.5	4650	15.9	14	200	22	700	20.1	18	0.44	76.9	74.3	88.1	93.5	72	93	95.5	1	0.6	7013UC
7014UC	70	110	20	1.1	0.6	53.5	45.0	5450	4600	59.0	6050	15.7	13	000	20	800	22.1	24	0.61	83.6	80.5	96.4	102.6	77	103	105.5	1	0.6	7014UC
7015UC	75	115	20	1.1	0.6	55.0	48.0	5600	4900	62.0	6350	15.9	12	300	19	700	22.8	26	0.64	88.6	85.5	101.4	107.6	82	108	110.5	1	0.6	7015UC
7016UC	80	125	22	1.1	0.6	67.0	58.0	6850	5900	74.5	7600	15.7	11	400	18	300	24.8	34	0.86	95.2	91.7	109.8	116.8	87	118	120.5	1	0.6	7016UC
7017UC	85	130	22	1.1	0.6	69.0	61.5	7000	6250	78.5	8000	15.9	10	900	17	400	25.5	36	0.90	100.2	96.7	114.8	121.8	92	123	125.5	1	0.6	7017UC
7018UC	90	140	24	1.5	1	82.0	72.5	8350	7400	95.0	9700	15.7	10	200	16	300	27.5	47	1.17	106.9	103.0	123.2	131.0	98.5	131.5	134.5	1.5	1	7018UC
7019UC	95	145	24	1.5	1	84.0	76.5	8550	7800	100	10200	15.9	9	800	15	600	28.2	49	1.22	111.9	108.0	128.2	136.0	103.5	136.5	139.5	1.5	1	7019UC
7020UC	100	150	24	1.5	1	86.0	81.0	8750	8250	104	10600	16.0	9	400	15	000	28.8	51	1.27	116.9	113.0	133.2	140.9	108.5	141.5	144.5	1.5	1	7020UC
7021UC	105	160	26	2	1	101	93.5	10300	9550	120	12300	15.9	8	800	14	100	30.8	70	1.58	123.5	119.2	141.5	150.1	115	150	154.5	2	1	7021UC
7022UC	110	170	28	2	1	116	106	11800	10900	140	14200	15.8	8	400	13	400	32.9	83	1.98	130.2	125.4	149.9	159.3	120	160	164.5	2	1	7022UC
7024UC	120	180	28	2	1	118	113	12000	11500	147	14900	16.0	7	800	12	500	34.2	90	2.11	140.2	135.4	159.9	169.3	130	170	174.5	2	1	7024UC
7026UC	130	200	33	2	1	148	144	15100	14700	186	19000	15.9	7	100	11	400	38.7	131	3.25	153.9	148.5	176.2	186.9	140	190	194.5	2	1	7026UC
7028UC	140	210	33	2	1	151	152	15400	15500	193	19700	16.0	6	700	10	700	40.1	144	3.38	164.0	158.7	186.3	196.8	150	200	204.5	2	1	7028UC
7030CT1B	150	225	35	2.1	1.1	167	168	17000	17200	81.0	8300	16.0	4	500	5	800	42.7	166	4.19	174.2	—	200.8	210.5	162	213	218	2	1	7030CT1B
7032CT1B	160	240	38	2.1	1.1	189	193	19300	19700	87.5	8950	16.0	4	200	5	400	45.9	214	5.14	185.5	—	214.5	224.6	172	228	233	2	1	7032CT1B
7034CT1B	170	260	42	2.1	1.1	227	234	23100	23900	118	12000	15.9	3	900	5	100	49.9	278	6.94	199.0	—	231.0	242.9	182	248	253	2	1	7034CT1B
7036CT1B	180	280	46	2.1	1.1	268	288	27400	29300	144	14700	15.7	3	700	4	700	53.9	360	9.12	212.0	—	248.0	261.2	192	268	273	2	1	7036CT1B
7038CT1B	190	290	46	2.1	1.1	273	305	27900	31500	151	15400	15.9	3	500	4	500	55.2	375	9.53	222.0	—	258.0	271.2	202	278	283	2	1	7038CT1B
7040CT1B	200	310	51	2.1	1.1	305	355	31500	36000	173	17600	15.7	3	300	4	300	59.8	492	12.3	235.0	—	275.0	289.5	212	298	303	2	1	7040CT1B

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.38						1.47	1.65	2.39	
0.357	0.4						1.4	1.57	2.28	
0.714	0.43						1.3	1.46	2.11	
1.07	0.46						1.23	1.38	2	
1.43	0.47						1.19	1.34	1.93	
2.14	0.5	1	0	0.44			1.12	1.26	1.82	
3.57	0.55						1.02	1.14	1.66	
5.35	0.56						1	1.12	1.63	
7.14	0.56						1	1.12	1.63	

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

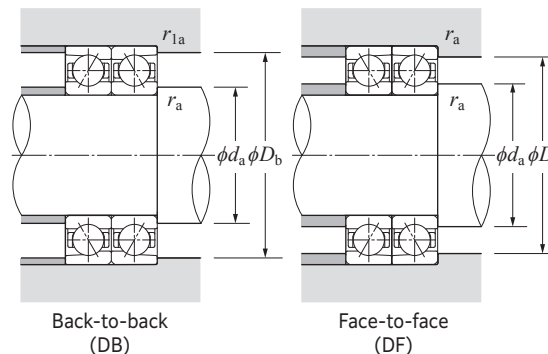

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (steel ball spec.)
70U type



Contact angle 25° d 10–140 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					Part number	
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf	min ⁻¹	grease lubrication				oil lubrication	mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{1s}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)								<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min		<i>D</i> _a max
7000UAD	10	26	8	0.3	0.15	5.70	2.40	580	244	2.77	283	57 000	92 100	8.2	0.9	0.019	15.2	14.0	20.4	22.7	12.5	23.5	24.8	0.3	0.15	7000UAD	
7001UAD	12	28	8	0.3	0.15	6.20	2.82	630	287	3.10	315	49 500	80 000	8.8	1.0	0.021	17.9	16.7	23.1	25.4	14.5	25.5	26.8	0.3	0.15	7001UAD	
7002UAD	15	32	9	0.3	0.15	7.00	3.55	715	360	3.75	380	43 200	69 800	10.0	1.3	0.030	20.9	19.7	26.1	28.5	17.5	29.5	30.8	0.3	0.15	7002UAD	
7003UAD	17	35	10	0.3	0.15	8.75	4.35	890	445	4.85	495	39 000	63 100	11.1	1.8	0.037	23.0	21.6	29.0	32.0	19.5	32.5	33.8	0.3	0.15	7003UAD	
7004UAD	20	42	12	0.6	0.3	11.8	6.30	1 200	645	7.10	720	32 200	52 100	13.4	2.9	0.067	28.1	26.4	34.9	38.3	24.5	37.5	39.5	0.6	0.3	7004UAD	
7005UAD	25	47	12	0.6	0.3	13.0	7.65	1 320	780	8.30	845	28 200	45 600	14.5	3.3	0.079	32.6	30.9	39.4	42.8	29.5	42.5	44.5	0.6	0.3	7005UAD	
7006UAD	30	55	13	1	0.6	16.7	10.5	1 700	1 070	11.5	1 170	23 600	38 100	16.6	4.8	0.11	39.2	37.3	46.9	50.6	35.5	49.5	50.5	1	0.6	7006UAD	
7007UAD	35	62	14	1	0.6	21.0	13.9	2 140	1 420	14.3	1 460	20 900	33 800	18.4	6.3	0.15	44.2	42.2	52.8	56.9	40.5	56.5	57.5	1	0.6	7007UAD	
7008UAD	40	68	15	1	0.6	22.5	16.0	2 290	1 630	16.1	1 650	18 800	30 400	20.2	7.4	0.19	49.7	47.7	58.3	62.5	45.5	62.5	63.5	1	0.6	7008UAD	
7009UAD	45	75	16	1	0.6	26.6	19.4	2 710	1 980	19.9	2 030	16 900	27 300	22.1	9.4	0.24	55.3	53.0	64.7	69.3	50.5	69.5	70.5	1	0.6	7009UAD	
7010UAD	50	80	16	1	0.6	28.2	21.9	2 880	2 230	22.2	2 260	15 600	25 200	23.2	11	0.26	60.3	58.0	69.7	74.3	55.5	74.5	75.5	1	0.6	7010UAD	
7011UAD	55	90	18	1.1	0.6	37.0	28.7	3 800	2 930	28.6	2 920	14 000	22 600	26.0	16	0.38	66.9	64.3	78.1	83.5	62	83	85.5	1	0.6	7011UAD	
7012UAD	60	95	18	1.1	0.6	38.0	30.5	3 900	3 150	30.0	3 100	13 100	21 200	27.2	17	0.41	71.9	69.3	83.1	88.4	67	88	90.5	1	0.6	7012UAD	
7013UAD	65	100	18	1.1	0.6	40.0	34.0	4 100	3 500	33.5	3 400	12 300	19 900	28.3	18	0.44	76.9	74.3	88.1	93.4	72	93	95.5	1	0.6	7013UAD	
7014UAD	70	110	20	1.1	0.6	51.0	43.0	5 200	4 350	43.5	4 450	11 300	18 200	31.1	24	0.61	83.6	80.5	96.4	102.6	77	103	105.5	1	0.6	7014UAD	
7015UAD	75	115	20	1.1	0.6	52.0	45.5	5 300	4 650	45.5	4 650	10 700	17 300	32.3	26	0.64	88.6	85.5	101.4	107.6	82	108	110.5	1	0.6	7015UAD	
7016UAD	80	125	22	1.1	0.6	63.5	55.0	6 500	5 600	55.0	5 600	9 900	16 000	35.0	34	0.86	95.2	91.7	109.8	116.8	87	118	120.5	1	0.6	7016UAD	
7017UAD	85	130	22	1.1	0.6	65.0	58.5	6 650	5 950	57.5	5 850	9 400	15 300	36.2	36	0.90	100.2	96.7	114.8	121.7	92	123	125.5	1	0.6	7017UAD	
7018UAD	90	140	24	1.5	1	77.5	69.0	7 900	7 050	70.0	7 150	8 800	14 300	39.0	47	1.17	106.9	103.0	123.2	130.9	98.5	131.5	134.5	1.5	1	7018UAD	
7019UAD	95	145	24	1.5	1	79.5	73.0	8 100	7 400	73.5	7 500	8 500	13 700	40.1	49	1.22	111.9	108.0	128.2	135.9	103.5	136.5	139.5	1.5	1	7019UAD	
7020UAD	100	150	24	1.5	1	81.0	76.5	8 300	7 800	77.0	7 850	8 100	13 100	41.3	51	1.27	116.9	113.0	133.2	140.9	108.5	141.5	144.5	1.5	1	7020UAD	
7021UAD	105	160	26	2	1	95.0	89.0	9 700	9 050	88.0	9 000	7 700	12 400	44.1	70	1.58	123.5	119.2	141.5	150.1	115	150	154.5	2	1	7021UAD	
7022UAD	110	170	28	2	1	109	101	11 200	10 300	103	10 500	7 300	11 700	46.8	83	1.98	130.2	125.4	149.9	159.2	120	160	164.5	2	1	7022UAD	
7024UAD	120	180	28	2	1	111	107	11 400	10 900	108	11 000	6 800	10 900	49.2	90	2.11	140.2	135.4	159.9	169.2	130	170	174.5	2	1	7024UAD	
7026UAD	130	200	33	2	1	140	136	14 200	13 900	137	14 000	6 200	9 900	55.2	131	3.25	153.9	148.5	176.2	186.8	140	190	194.5	2	1	7026UAD	
7028UAD	140	210	33	2	1	142	144	14 500	14 700	141	14 400	5 800	9 300	57.5	144	3.38	164.0	158.7	186.3	196.8	150	200	204.5	2	1	7028UAD	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

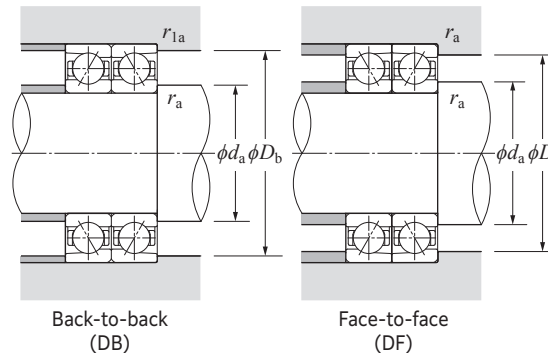


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (steel ball spec.)
70U type



Contact angle 30° d 10–140 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kgf	dynamic kgf	static kN	kN	kgf	min ⁻¹	oil				mm				d _a	D _a	D _b	r _{as}	r _{1as}	
	d	D	B	r _s min ⁻¹	r _{1s} min ⁻¹	C _r	C _{0r}	C _r	C _{0r}	(static)	grease lubrication	oil lubrication	a				Single-row (approx.)	Single-row (approx.)	d ₁	d ₂	D ₁	D ₂	min	max	max	
7000U	10	26	8	0.3	0.15	5.55	2.33	565	238	2.12	216	48 200	65 700	9.2	0.9	0.019	15.2	14.0	20.4	22.7	12.5	23.5	24.8	0.3	0.15	7000U
7001U	12	28	8	0.3	0.15	6.00	2.74	615	279	2.37	242	41 900	57 100	10.0	1.0	0.021	17.9	16.7	23.1	25.4	14.5	25.5	26.8	0.3	0.15	7001U
7002U	15	32	9	0.3	0.15	6.80	3.45	690	350	2.86	292	36 600	49 800	11.3	1.3	0.030	20.9	19.7	26.1	28.4	17.5	29.5	30.8	0.3	0.15	7002U
7003U	17	35	10	0.3	0.15	8.45	4.20	865	430	3.70	380	33 000	45 000	12.6	1.8	0.037	23.0	21.6	29.0	31.9	19.5	32.5	33.8	0.3	0.15	7003U
7004U	20	42	12	0.6	0.3	11.4	6.10	1 160	620	5.45	560	27 300	37 200	15.2	2.9	0.067	28.1	26.4	34.9	38.3	24.5	37.5	39.5	0.6	0.3	7004U
7005U	25	47	12	0.6	0.3	12.5	7.40	1 280	755	6.40	655	23 900	32 500	16.5	3.3	0.079	32.6	30.9	39.4	42.8	29.5	42.5	44.5	0.6	0.3	7005U
7006U	30	55	13	1	0.6	16.1	10.2	1 640	1 040	8.90	910	20 000	27 200	19.0	4.8	0.11	39.2	37.3	46.9	50.6	35.5	49.5	50.5	1	0.6	7006U
7007U	35	62	14	1	0.6	20.3	13.4	2 070	1 370	11.0	1 120	17 700	24 100	21.1	6.3	0.15	44.2	42.2	52.8	56.9	40.5	56.5	57.5	1	0.6	7007U
7008U	40	68	15	1	0.6	21.6	15.4	2 200	1 570	12.4	1 260	15 900	21 700	23.2	7.4	0.19	49.7	47.7	58.3	62.4	45.5	62.5	63.5	1	0.6	7008U
7009U	45	75	16	1	0.6	25.6	18.7	2 610	1 910	15.4	1 570	14 300	19 500	25.4	9.4	0.24	55.3	53.0	64.7	69.3	50.5	69.5	70.5	1	0.6	7009U
7010U	50	80	16	1	0.6	27.1	21.1	2 760	2 150	17.1	1 740	13 200	18 000	26.9	11	0.26	60.3	58.0	69.7	74.3	55.5	74.5	75.5	1	0.6	7010U
7011U	55	90	18	1.1	0.6	35.5	27.7	3 650	2 830	22.0	2 240	11 900	16 200	30.1	16	0.38	66.9	64.3	78.1	83.4	62	83	85.5	1	0.6	7011U
7012U	60	95	18	1.1	0.6	36.5	29.5	3 750	3 000	23.2	2 360	11 100	15 100	31.5	17	0.41	71.9	69.3	83.1	88.4	67	88	90.5	1	0.6	7012U
7013U	65	100	18	1.1	0.6	38.5	33.0	3 950	3 350	25.5	2 600	10 400	14 200	32.9	18	0.44	76.9	74.3	88.1	93.4	72	93	95.5	1	0.6	7013U
7014U	70	110	20	1.1	0.6	49.0	41.5	5 000	4 200	33.5	3 450	9 500	13 000	36.1	24	0.61	83.6	80.5	96.4	102.5	77	103	105.5	1	0.6	7014U
7015U	75	115	20	1.1	0.6	50.0	43.5	5 100	4 450	35.0	3 600	9 000	12 300	37.6	26	0.64	88.6	85.5	101.4	107.5	82	108	110.5	1	0.6	7015U
7016U	80	125	22	1.1	0.6	61.0	53.0	6 250	5 400	42.0	4 300	8 400	11 400	40.8	34	0.86	95.2	91.7	109.8	116.7	87	118	120.5	1	0.6	7016U
7017U	85	130	22	1.1	0.6	62.5	56.0	6 350	5 700	44.0	4 500	8 000	10 900	42.2	36	0.90	100.2	96.7	114.8	121.7	92	123	125.5	1	0.6	7017U
7018U	90	140	24	1.5	1	74.5	66.5	7 600	6 750	54.0	5 500	7 500	10 200	45.4	47	1.17	106.9	103.0	123.2	130.8	98.5	131.5	134.5	1.5	1	7018U
7019U	95	145	24	1.5	1	76.5	70.0	7 800	7 150	56.5	5 800	7 200	9 800	46.8	49	1.22	111.9	108.0	128.2	135.8	103.5	136.5	139.5	1.5	1	7019U
7020U	100	150	24	1.5	1	78.0	74.0	7 950	7 500	59.5	6 050	6 900	9 400	48.3	51	1.27	116.9	113.0	133.2	140.8	108.5	141.5	144.5	1.5	1	7020U
7021U	105	160	26	2	1	91.5	85.5	9 300	8 750	68.0	6 900	6 500	8 800	51.5	70	1.58	123.5	119.2	141.5	150.0	115	150	154.5	2	1	7021U
7022U	110	170	28	2	1	105	97.5	10 700	9 950	79.5	8 100	6 100	8 400	54.6	83	1.98	130.2	125.4	149.9	159.1	120	160	164.5	2	1	7022U
7024U	120	180	28	2	1	107	103	10 900	10 500	83.5	8 500	5 700	7 800	57.5	90	2.11	140.2	135.4	159.9	169.1	130	170	174.5	2	1	7024U
7026U	130	200	33	2	1	134	131	13 700	13 400	106	10 800	5 200	7 100	64.4	131	3.25	153.9	148.5	176.2	186.7	140	190	194.5	2	1	7026U
7028U	140	210	33	2	1	137	139	13 900	14 100	109	11 100	4 900	6 700	67.3	144	3.38	164.0	158.7	186.3	196.7	150	200	204.5	2	1	7028U

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.8	1	0	0.39	0.76	1	0.78	0.63	1.24

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.33		1	0.66

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

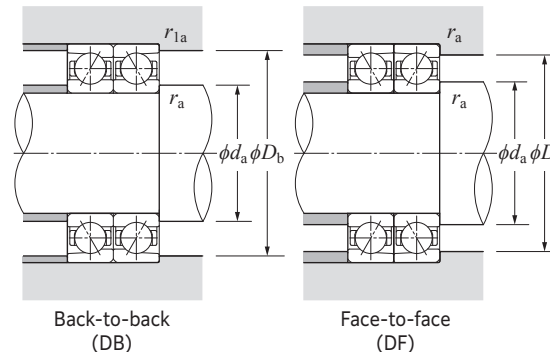


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

Standard angular contact ball bearings (steel ball spec.) 72 type

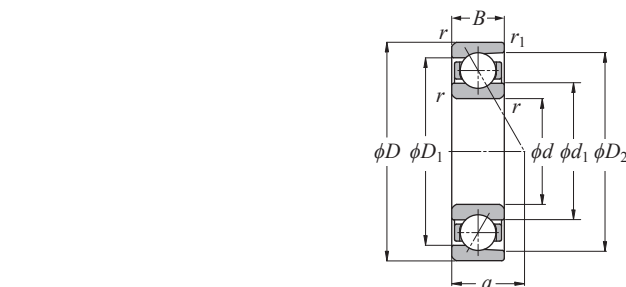

Contact angle 15° d 10–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions			Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kgf	dynamic kgf	static kN	kgf	grease lubrication		oil lubrication	mm				mm	mm	mm	mm	mm				
	d	D	B	$r_{s\min}^{1)}$	$r_{ls\min}^{1)}$	C_r	C_{0r}	C_r	C_{0r}	(static)	f_0		d_1	D_1				D_2	d_a min	D_a max	D_b max	r_{as} max	r_{1as} max			
7200C	10	30	9	0.6	0.3	6.00	2.64	610	269	1.01	103	13.4	42 900	55 600	7.3	0.9	0.029	17.4	23.5	25.5	14.5	25.5	27.5	0.6	0.3	7200C
7201C	12	32	10	0.6	0.3	7.85	3.45	800	355	1.59	162	12.9	40 000	51 800	8.0	1.3	0.036	18.4	25.6	27.8	16.5	27.5	29.5	0.6	0.3	7201C
7202C	15	35	11	0.6	0.3	9.95	4.50	1 020	460	1.89	193	12.9	35 200	45 600	8.9	1.5	0.045	20.8	29.0	31.6	19.5	30.5	32.5	0.6	0.3	7202C
7203C	17	40	12	0.6	0.3	12.4	5.75	1 260	590	2.67	272	13.0	30 500	39 600	9.9	2.1	0.062	24.2	33.2	36.2	21.5	35.5	37.5	0.6	0.3	7203C
7204C	20	47	14	1	0.6	16.2	8.15	1 650	835	3.70	375	13.4	25 500	33 000	11.6	3.1	0.10	29.4	39.4	42.8	25.5	41.5	42.5	1	0.6	7204C
7205C	25	52	15	1	0.6	18.4	10.2	1 870	1 050	3.75	385	14.0	22 600	29 200	12.7	4.1	0.12	33.8	44.2	47.3	30.5	46.5	47.5	1	0.6	7205C
7206C	30	62	16	1	0.6	25.5	14.7	2 600	1 500	7.10	725	14.0	18 900	24 500	14.3	6.6	0.19	40.6	52.2	56.4	35.5	56.5	57.5	1	0.6	7206C
7207C	35	72	17	1.1	0.6	33.5	19.9	3 450	2 030	10.6	1 090	13.9	16 400	21 300	15.7	8.8	0.27	46.8	60.2	65.0	42	65	67.5	1	0.6	7207C
7208C	40	80	18	1.1	0.6	40.5	25.2	4 100	2 570	14.4	1 470	14.2	14 700	19 000	17.1	11	0.35	53.0	67.0	72.3	47	73	75.5	1	0.6	7208C
7209C	45	85	19	1.1	0.6	45.0	28.8	4 600	2 940	14.8	1 510	14.2	13 500	17 500	18.2	14	0.40	57.3	72.5	78.1	52	78	80.5	1	0.6	7209C
7210C	50	90	20	1.1	0.6	47.5	31.5	4 850	3 250	15.3	1 560	14.5	12 600	16 300	19.4	17	0.45	62.2	77.6	83.2	57	83	85.5	1	0.6	7210C
7211C	55	100	21	1.5	1	58.5	40.0	6 000	4 100	21.6	2 200	14.5	11 400	14 700	20.9	21	0.59	69.0	86.0	92.3	63.5	91.5	94.5	1.5	1	7211C
7212C	60	110	22	1.5	1	71.0	49.5	7 250	5 050	26.1	2 660	14.5	10 200	13 200	22.6	28	0.76	77.0	96.0	102.9	68.5	101.5	104.5	1.5	1	7212C
7213C	65	120	23	1.5	1	77.5	55.0	7 900	5 600	28.5	2 910	14.6	9 500	12 300	23.9	34	0.95	82.5	102.5	109.7	73.5	111.5	114.5	1.5	1	7213C
7214C	70	125	24	1.5	1	84.0	60.0	8 600	6 150	31.0	3 150	14.6	9 000	11 700	25.1	40	1.04	87.0	108.0	115.5	78.5	116.5	119.5	1.5	1	7214C
7215C	75	130	25	1.5	1	88.0	65.5	8 950	6 700	33.5	3 400	14.8	8 500	11 000	26.4	43	1.14	93.0	114.0	121.5	83.5	121.5	124.5	1.5	1	7215C
7216C	80	140	26	2	1	103	77.5	10 500	7 900	34.5	3 550	14.7	8 000	10 400	27.8	54	1.39	98.1	121.4	129.6	90	130	134.5	2	1	7216C
7217C	85	150	28	2	1	115	90.5	11 800	9 200	46.5	4 750	14.9	7 500	9 700	29.9	63	1.73	106.1	129.9	138.5	95	140	144.5	2	1	7217C
7218C	90	160	30	2	1	136	105	13 900	10 700	53.5	5 450	14.6	7 000	9 100	31.8	80	2.13	111.6	138.5	147.9	100	150	154.5	2	1	7218C
7219C	95	170	32	2.1	1.1	154	120	15 700	12 200	62.0	6 350	14.6	6 600	8 600	33.8	96	2.58	118.2	146.8	157.0	107	158	163	2	1	7219C
7220C	100	180	34	2.1	1.1	165	127	16 800	12 900	67.0	6 800	14.5	6 300	8 100	35.8	119	3.21	124.8	155.2	166.2	112	168	173	2	1	7220C
7221CT1B	105	190	36	2.1	1.1	180	143	18 300	14 600	74.5	7 600	14.5	6 000	7 700	37.8	147	3.81	131.3	163.7	175.3	117	178	183	2	1	7221CT1B
7222CT1B	110	200	38	2.1	1.1	195	160	19 900	16 300	86.0	8 800	14.5	5 700	7 400	39.9	171	4.49	138.0	172.0	184.4	122	188	193	2	1	7222CT1B
7224CT1B	120	215	40	2.1	1.1	220	192	22 400	19 600	91.5	9 300	14.6	5 300	6 800	42.5	206	5.44	149.0	186.0	198.6	132	203	208	2	1	7224CT1B
7226CT1B	130	230	40	3	1.1	236	214	24 100	21 800	111	11 300	14.7	4 900	6 300	44.2	232	6.19	161.0	199.0	212.6	144	216	223	2.5	1	7226CT1B

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.38								1.65	2.39
0.357	0.4								1.57	2.28
0.714	0.43								1.46	2.11
1.07	0.46								1.38	2
1.43	0.47	1	0	0.44			1	1.34	0.72	1.93
2.14	0.5								1.26	1.82
3.57	0.55								1.14	1.66
5.35	0.56								1.12	1.63
7.14	0.56								1.12	1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.46		1	0.92


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (ceramic ball spec.)
5S-79U type



Contact angle 15° d 10–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					Part number
	mm					dynamic	static	dynamic	static	kN	kgf		min ⁻¹	grease				oil	mm	mm	mm	mm	mm	mm			
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{ls min} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀		lubrication	lubrication				<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>D</i> _{a max}	<i>D</i> _{b max}	<i>r</i> _{as max}	<i>r</i> _{las max}	
5S-7900UC	10	22	6	0.3	0.15	3.55	1.15	360	117	1.94	198	9.8	84 000	136 800	5.2	0.4	0.009	14.3	13.5	17.7	19.4	12.5	19.5	20.8	0.3	0.15	5S-7900UC
5S-7901UC	12	24	6	0.3	0.15	3.70	1.29	380	131	2.18	223	10.2	74 600	121 600	5.4	0.4	0.010	16.3	15.5	19.7	21.3	14.5	21.5	22.8	0.3	0.15	5S-7901UC
5S-7902UC	15	28	7	0.3	0.15	5.65	2.01	575	205	3.40	345	10.0	62 500	101 900	6.4	0.8	0.013	19.3	18.3	23.7	25.6	17.5	25.5	26.8	0.3	0.15	5S-7902UC
5S-7903UC	17	30	7	0.3	0.15	5.90	2.22	605	226	3.75	385	10.3	57 200	93 200	6.7	0.8	0.015	21.3	20.3	25.7	27.8	19.5	27.5	28.8	0.3	0.15	5S-7903UC
5S-7904UC	20	37	9	0.3	0.15	8.45	3.40	865	345	5.75	585	10.3	47 100	76 800	8.3	1.5	0.033	25.9	24.7	31.1	33.6	22.5	34.5	35.8	0.3	0.15	5S-7904UC
5S-7905UC	25	42	9	0.3	0.15	9.05	4.00	925	405	6.80	695	10.7	40 100	65 400	9.0	1.8	0.039	30.9	29.7	36.1	38.6	27.5	39.5	40.8	0.3	0.15	5S-7905UC
5S-7906UC	30	47	9	0.3	0.15	9.55	4.60	975	470	7.85	800	11.0	34 900	56 900	9.7	2.0	0.044	35.9	34.7	41.1	43.6	32.5	44.5	45.8	0.3	0.15	5S-7906UC
5S-7907UC	35	55	10	0.6	0.3	15.2	7.10	1 550	725	12.1	1 240	10.7	29 900	48 700	11.1	3.4	0.062	41.6	39.9	48.4	51.7	39.5	50.5	52.5	0.6	0.3	5S-7907UC
5S-7908UC	40	62	12	0.6	0.3	16.0	8.15	1 640	830	13.9	1 420	11.0	26 300	42 900	12.9	4.7	0.10	47.6	45.9	54.4	57.8	44.5	57.5	59.5	0.6	0.3	5S-7908UC
5S-7909UC	45	68	12	0.6	0.3	19.9	10.3	2 030	1 050	17.6	1 790	11.0	23 800	38 800	13.6	5.9	0.11	52.7	50.8	60.4	64.1	49.5	63.5	65.5	0.6	0.3	5S-7909UC
5S-7910UC	50	72	12	0.6	0.3	21.0	11.5	2 140	1 180	19.7	2 010	11.1	22 000	35 900	14.2	6.2	0.11	57.2	55.3	64.9	68.6	54.5	67.5	69.5	0.6	0.3	5S-7910UC
5S-7911UC	55	80	13	1	0.6	21.8	12.8	2 230	1 310	22.0	2 240	11.3	19 900	32 400	15.6	7.5	0.16	63.7	61.8	71.4	75.1	60.5	74.5	75.5	1	0.6	5S-7911UC
5S-7912UC	60	85	13	1	0.6	22.7	14.1	2 320	1 440	24.2	2 460	11.4	18 500	30 200	16.3	8.0	0.17	68.7	66.8	76.4	80.1	65.5	79.5	80.5	1	0.6	5S-7912UC
5S-7913UC	65	90	13	1	0.6	23.0	14.7	2 350	1 500	25.4	2 590	11.4	17 300	28 300	16.9	8.6	0.19	73.7	71.8	81.4	85.1	70.5	84.5	85.5	1	0.6	5S-7913UC
5S-7914UC	70	100	16	1	0.6	33.0	20.9	3 350	2 140	36.0	3 650	11.4	15 800	25 800	19.4	14	0.30	80.3	78.0	89.7	94.3	75.5	94.5	95.5	1	0.6	5S-7914UC
5S-7915UC	75	105	16	1	0.6	33.5	22.0	3 400	2 240	37.5	3 850	11.5	14 900	24 300	20.1	15	0.32	85.3	83.0	94.7	99.3	80.5	99.5	100.5	1	0.6	5S-7915UC
5S-7916UC	80	110	16	1	0.6	34.0	22.7	3 450	2 320	39.5	4 000	11.4	14 100	22 900	20.8	16	0.33	90.8	88.5	100.2	104.8	85.5	104.5	105.5	1	0.6	5S-7916UC
5S-7917UC	85	120	18	1.1	0.6	45.5	30.5	4 650	3 100	52.0	5 350	11.4	13 100	21 400	22.8	22	0.47	96.9	94.3	108.1	113.4	92	113	115.5	1	0.6	5S-7917UC
5S-7918UC	90	125	18	1.1	0.6	46.0	32.0	4 700	3 250	54.5	5 550	11.5	12 500	20 400	23.5	23	0.49	101.9	99.3	113.1	118.4	97	118	120.5	1	0.6	5S-7918UC
5S-7919UC	95	130	18	1.1	0.6	47.0	33.0	4 750	3 350	57.0	5 800	11.4	11 900	19 500	24.1	24	0.52	106.9	104.3	118.1	123.4	102	123	125.5	1	0.6	5S-7919UC
5S-7920UC	100	140	20	1.1	0.6	60.0	42.5	6 150	4 300	72.5	7 400	11.4	11 200	18 200	26.1	33	0.70	113.6	110.5	126.4	132.6	107	133	135.5	1	0.6	5S-7920UC
5S-7921UC	105	145	20	1.1	0.6	61.0	44.0	6 250	4 500	75.5	7 700	11.5	10 800	17 500	26.8	34	0.73	118.6	115.5	131.4	137.6	112	138	140.5	1	0.6	5S-7921UC
5S-7922UC	110	150	20	1.1	0.6	62.0	45.5	6 300	4 650	78.5	8 050	11.4	10 300	16 800	27.5	36	0.76	123.6	120.5	136.4	142.6	117	143	145.5	1	0.6	5S-7922UC
5S-7924UC	120	165	22	1.1	0.6	76.5	56.5	7 800	5 750	97.0	9 900	11.5	9 400	15 400	30.2	48	1.03	135.2	131.7	149.8	156.7	127	158	160.5	1	0.6	5S-7924UC
5S-7926UC	130	180	24	1.5	1	94.0	70.5	9 600	7 200	121	12 300	11.5	8 700	14 100	32.9	63	1.34	146.9	143.0	163.2	170.9	138.5	171.5	174.5	1.5	1	5S-7926UC

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38							1.47	1.65
0.357	0.4							1.4	1.57
0.714	0.43							1.3	1.46
1.07	0.46							1.23	1.38
1.43	0.47							1.19	1.34
2.14	0.5	1	0	0.44		1	0	1.12	1.26
3.57	0.55							1.02	1.14
5.35	0.56							1	1.12
7.14	0.56							1	1.12

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Back-to-back (DB) Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (ceramic ball spec.)
5S-79U type



Contact angle 25° d 10–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					Part number
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf	min ⁻¹					mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min¹⁾}	<i>r</i> _{1s min¹⁾}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	grease lubrication	oil lubrication	<i>d</i> ₁				<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>D</i> _{a max}	<i>D</i> _{b max}	<i>r</i> _{as max}	<i>r</i> _{1as max}		
5S-7900UAD	10	22	6	0.3	0.15	3.40	1.10	345	112	2.12	216	73 200	120 100	6.8	0.4	0.009	14.3	13.5	17.7	19.4	12.5	19.5	20.8	0.3	0.15	5S-7900UAD
5S-7901UAD	12	24	6	0.3	0.15	3.55	1.23	360	125	2.30	234	65 100	106 800	7.2	0.4	0.010	16.3	15.5	19.7	21.3	14.5	21.5	22.8	0.3	0.15	5S-7901UAD
5S-7902UAD	15	28	7	0.3	0.15	5.40	1.92	550	196	3.35	345	54 500	89 400	8.6	0.8	0.013	19.3	18.3	23.7	25.6	17.5	25.5	26.8	0.3	0.15	5S-7902UAD
5S-7903UAD	17	30	7	0.3	0.15	5.60	2.12	575	216	3.60	370	49 800	81 800	9.0	0.8	0.015	21.3	20.3	25.7	27.7	19.5	27.5	28.8	0.3	0.15	5S-7903UAD
5S-7904UAD	20	37	9	0.3	0.15	8.05	3.25	820	330	5.60	575	41 100	67 400	11.2	1.5	0.033	25.9	24.7	31.1	33.6	22.5	34.5	35.8	0.3	0.15	5S-7904UAD
5S-7905UAD	25	42	9	0.3	0.15	8.60	3.80	875	385	6.40	650	35 000	57 400	12.4	1.8	0.039	30.9	29.7	36.1	38.6	27.5	39.5	40.8	0.3	0.15	5S-7905UAD
5S-7906UAD	30	47	9	0.3	0.15	9.00	4.35	920	445	7.15	730	30 400	49 900	13.5	2.0	0.044	35.9	34.7	41.1	43.6	32.5	44.5	45.8	0.3	0.15	5S-7906UAD
5S-7907UAD	35	55	10	0.6	0.3	14.4	6.75	1 470	690	12.1	1 240	26 000	42 700	15.6	3.4	0.062	41.6	39.9	48.4	51.7	39.5	50.5	52.5	0.6	0.3	5S-7907UAD
5S-7908UAD	40	62	12	0.6	0.3	15.2	7.75	1 550	790	13.6	1 380	23 000	37 700	18.0	4.7	0.100	47.6	45.9	54.4	57.8	44.5	57.5	59.5	0.6	0.3	5S-7908UAD
5S-7909UAD	45	68	12	0.6	0.3	18.8	9.75	1 920	995	17.5	1 790	20 700	34 000	19.2	5.9	0.110	52.7	50.8	60.4	64.0	49.5	63.5	65.5	0.6	0.3	5S-7909UAD
5S-7910UAD	50	72	12	0.6	0.3	19.8	10.9	2 020	1 110	19.3	1 970	19 200	31 500	20.3	6.2	0.110	57.2	55.3	64.9	68.5	54.5	67.5	69.5	0.6	0.3	5S-7910UAD
5S-7911UAD	55	80	13	1	0.6	20.6	12.2	2 100	1 240	21.1	2 160	17 400	28 500	22.3	7.5	0.160	63.7	61.8	71.4	75.1	60.5	74.5	75.5	1	0.6	5S-7911UAD
5S-7912UAD	60	85	13	1	0.6	21.4	13.2	2 190	1 350	23.0	2 340	16 200	26 500	23.5	8.0	0.170	68.7	66.8	76.4	80.1	65.5	79.5	80.5	1	0.6	5S-7912UAD
5S-7913UAD	65	90	13	1	0.6	21.7	13.7	2 210	1 390	23.9	2 430	15 100	24 800	24.6	8.6	0.190	73.7	71.8	81.4	85.0	70.5	84.5	85.5	1	0.6	5S-7913UAD
5S-7914UAD	70	100	16	1	0.6	31.0	19.8	3 150	2 020	33.5	3 400	13 800	22 600	27.9	14	0.300	80.3	78	89.7	94.3	75.5	94.5	95.5	1	0.6	5S-7914UAD
5S-7915UAD	75	105	16	1	0.6	31.5	20.5	3 200	2 090	34.5	3 550	13 000	21 400	29.1	15	0.320	85.3	83	94.7	99.2	80.5	99.5	100.5	1	0.6	5S-7915UAD
5S-7916UAD	80	110	16	1	0.6	32.0	21.2	3 250	2 160	36.0	3 700	12 300	20 100	30.4	16	0.330	90.8	88.5	100.2	104.7	85.5	104.5	105.5	1	0.6	5S-7916UAD
5S-7917UAD	85	120	18	1.1	0.6	43.0	28.8	4 350	2 940	47.0	4 800	11 400	18 800	33.0	22	0.470	96.9	94.3	108.1	113.4	92	113	115.5	1	0.6	5S-7917UAD
5S-7918UAD	90	125	18	1.1	0.6	43.5	29.7	4 450	3 050	49.0	5 000	10 900	17 900	34.2	23	0.490	101.9	99.3	113.1	118.4	97	118	120.5	1	0.6	5S-7918UAD
5S-7919UAD	95	130	18	1.1	0.6	44.0	30.5	4 500	3 150	51.0	5 200	10 400	17 100	35.3	24	0.520	106.9	104.3	118.1	123.4	102	123	125.5	1	0.6	5S-7919UAD
5S-7920UAD	100	140	20	1.1	0.6	56.5	39.5	5 800	4 050	67.5	6 850	9 800	16 000	38.1	33	0.700	113.6	110.5	126.4	132.5	107	133	135.5	1	0.6	5S-7920UAD
5S-7921UAD	105	145	20	1.1	0.6	57.5	41.0	5 850	4 200	70.0	7 100	9 400	15 400	39.3	34	0.730	118.6	115.5	131.4	137.5	112	138	140.5	1	0.6	5S-7921UAD
5S-7922UAD	110	150	20	1.1	0.6	58.5	42.5	5 950	4 300	72.5	7 400	9 000	14 800	40.4	36	0.760	123.6	120.5	136.4	142.5	117	143	145.5	1	0.6	5S-7922UAD
5S-7924UAD	120	165	22	1.1	0.6	72.0	52.5	7 350	5 350	88.0	8 950	8 200	13 500	44.4	48	1.03	135.2	131.7	149.8	156.7	127	158	160.5	1	0.6	5S-7924UAD
5S-7926UAD	130	180	24	1.5	1	88.5	66.0	9 050	6 750	112	11 400	7 600	12 400	48.3	63	1.34	146.9	143	163.2	170.8	138.5	171.5	174.5	1.5	1	5S-7926UAD

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads


Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load


$P_{0r} = X_0 F_r + Y_0 F_a$				Back-to-back / Face-to-face	
Single row / Tandem				X_0	Y_0
				0.5	0.38
				1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

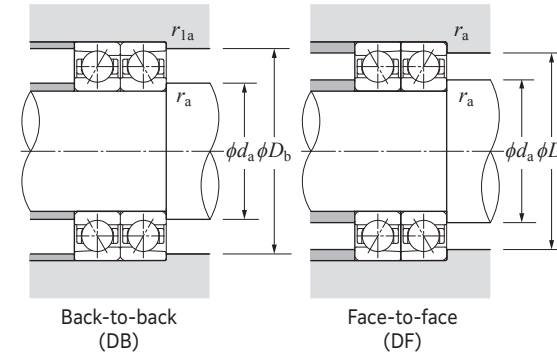

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (ceramic ball spec.)
5S-79U type



Contact angle 30° d 10–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static												kN	kgf	grease	oil	mm	
	mm	mm	mm	mm	mm	kN	kgf	kgf	min ⁻¹	min ⁻¹	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s min⁽¹⁾</i>	<i>r_{ls} min⁽¹⁾</i>	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	lubrication	lubrication	<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d₁</i>	<i>d₂</i>	<i>D₁</i>	<i>D₂</i>	<i>d_a min</i>	<i>D_a max</i>	<i>D_b max</i>	<i>r_{as} max</i>	<i>r_{las} max</i>		
5S-7900U	10	22	6	0.3	0.15	3.25	1.06	335	108	1.63	166	58 600	78 000	7.7	0.4	0.009	14.3	13.5	17.7	19.3	12.5	19.5	20.8	0.3	0.15	5S-7900U
5S-7901U	12	24	6	0.3	0.15	3.40	1.19	350	121	1.77	181	52 100	69 400	8.2	0.4	0.010	16.3	15.5	19.7	21.3	14.5	21.5	22.8	0.3	0.15	5S-7901U
5S-7902U	15	28	7	0.3	0.15	5.20	1.86	530	190	2.56	261	43 600	58 100	9.8	0.8	0.013	19.3	18.3	23.7	25.6	17.5	25.5	26.8	0.3	0.15	5S-7902U
5S-7903U	17	30	7	0.3	0.15	5.40	2.05	555	209	2.74	280	39 900	53 100	10.3	0.8	0.015	21.3	20.3	25.7	27.7	19.5	27.5	28.8	0.3	0.15	5S-7903U
5S-7904U	20	37	9	0.3	0.15	7.75	3.10	790	320	4.30	440	32 900	43 800	12.8	1.5	0.033	25.9	24.7	31.1	33.5	22.5	34.5	35.8	0.3	0.15	5S-7904U
5S-7905U	25	42	9	0.3	0.15	8.25	3.65	840	375	4.90	500	28 000	37 300	14.2	1.8	0.039	30.9	29.7	36.1	38.5	27.5	39.5	40.8	0.3	0.15	5S-7905U
5S-7906U	30	47	9	0.3	0.15	8.65	4.20	885	430	5.50	560	24 300	32 400	15.7	2.0	0.044	35.9	34.7	41.1	43.5	32.5	44.5	45.8	0.3	0.15	5S-7906U
5S-7907U	35	55	10	0.6	0.3	13.8	6.50	1 410	665	9.35	955	20 800	27 800	18.1	3.4	0.062	41.6	39.9	48.4	51.6	39.5	50.5	52.5	0.6	0.3	5S-7907U
5S-7908U	40	62	12	0.6	0.3	14.6	7.45	1 490	760	10.5	1 070	18 400	24 500	20.8	4.7	0.10	47.6	45.9	54.4	57.7	44.5	57.5	59.5	0.6	0.3	5S-7908U
5S-7909U	45	68	12	0.6	0.3	18.1	9.40	1 840	960	13.6	1 390	16 600	22 100	22.4	5.9	0.11	52.7	50.8	60.4	64.0	49.5	63.5	65.5	0.6	0.3	5S-7909U
5S-7910U	50	72	12	0.6	0.3	19.0	10.5	1 940	1 070	15.0	1 530	15 400	20 500	23.7	6.2	0.11	57.2	55.3	64.9	68.5	54.5	67.5	69.5	0.6	0.3	5S-7910U
5S-7911U	55	80	13	1	0.6	19.8	11.7	2 020	1 190	16.5	1 680	13 900	18 500	26.1	7.5	0.16	63.7	61.8	71.4	75.0	60.5	74.5	75.5	1	0.6	5S-7911U
5S-7912U	60	85	13	1	0.6	20.6	12.6	2 100	1 280	18.0	1 830	12 900	17 200	27.5	8.0	0.17	68.7	66.8	76.4	80.0	65.5	79.5	80.5	1	0.6	5S-7912U
5S-7913U	65	90	13	1	0.6	20.8	13.0	2 120	1 330	18.7	1 910	12 100	16 100	29.0	8.6	0.19	73.7	71.8	81.4	85.0	70.5	84.5	85.5	1	0.6	5S-7913U
5S-7914U	70	100	16	1	0.6	29.8	18.9	3 050	1 930	25.7	2 620	11 000	14 700	32.6	14	0.30	80.3	78.0	89.7	94.2	75.5	94.5	95.5	1	0.6	5S-7914U
5S-7915U	75	105	16	1	0.6	30.0	19.5	3 100	1 990	26.7	2 730	10 400	13 900	34.1	15	0.32	85.3	83.0	94.7	99.2	80.5	99.5	100.5	1	0.6	5S-7915U
5S-7916U	80	110	16	1	0.6	30.5	20.2	3 100	2 050	27.8	2 830	9 800	13 100	35.7	16	0.30	90.8	88.5	100.2	104.7	85.5	104.5	105.5	1	0.6	5S-7916U
5S-7917U	85	120	18	1.1	0.6	41.0	27.4	4 200	2 790	36.0	3 700	9 100	12 200	38.7	22	0.47	96.9	94.3	108.1	113.4	92	113	115.5	1	0.6	5S-7917U
5S-7918U	90	125	18	1.1	0.6	41.5	28.3	4 250	2 880	37.5	3 850	8 700	11 600	40.2	23	0.49	101.9	99.3	113.1	118.3	97	118	120.5	1	0.6	5S-7918U
5S-7919U	95	130	18	1.1	0.6	42.5	29.2	4 300	2 980	39.0	4 000	8 300	11 100	41.6	24	0.52	106.9	104.3	118.1	123.3	102	123	125.5	1	0.6	5S-7919U
5S-7920U	100	140	20	1.1	0.6	54.5	38.0	5 550	3 850	52.0	5 300	7 800	10 400	44.8	33	0.70	113.6	110.5	126.4	132.5	107	133	135.5	1	0.6	5S-7920U
5S-7921U	105	145	20	1.1	0.6	55.0	39.0	5 650	4 000	54.0	5 500	7 500	10 000	46.2	34	0.73	118.6	115.5	131.4	137.5	112	138	140.5	1	0.6	5S-7921U
5S-7922U	110	150	20	1.1	0.6	56.0	40.5	5 700	4 100	56.0	5 700	7 200	9 600	47.7	36	0.76	123.6	120.5	136.4	142.5	117	143	145.5	1	0.6	5S-7922U
5S-7924U	120	165	22	1.1	0.6	69.0	50.0	7 050	5 100	67.5	6 900	6 600	8 800	52.3	48	1.03	135.2	131.7	149.8	156.6	127	158	160.5	1	0.6	5S-7924U
5S-7926U	130	180	24	1.5	1	85.0	62.5	8 650	6 400	86.5	8 850	6 000	8 100	56.9	63	1.34	146.9	143.0	163.2	170.8	138.5	171.5	174.5	1.5	1	5S-7926U

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.8	1	0	0.39	0.76	1	0.78	0.63	1.24

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

e	Single row / Tandem		Back-to-back / Face-to-face	
	X_0	Y_0	X_0	Y_0
	0.5	0.33	1	0.66

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

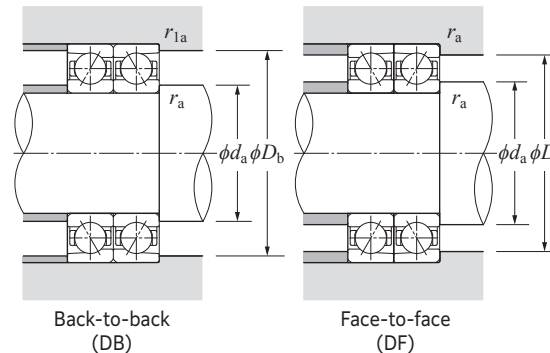


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (ceramic ball spec.)
5S-70U type



Contact angle 15° d 10–140 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					Part number
	mm					dynamic	static	dynamic	static	kN	kgf		min ⁻¹	kg				mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁽¹⁾	<i>r_{ls}</i> min ⁽¹⁾	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	<i>f</i> ₀		grease lubrication	oil lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>D</i> _a max	
5S-7000UC	10	26	8	0.3	0.15	5.90	1.72	600	175	2.88	293	8.7	75 500	123 000	6.4	0.9	0.017	15.2	14.0	20.4	22.7	12.5	23.5	24.8	0.3	0.15	5S-7000UC
5S-7001UC	12	28	8	0.3	0.15	6.45	2.03	655	207	3.40	350	9.3	65 500	106 800	6.8	1.0	0.018	17.9	16.7	23.1	25.4	14.5	25.5	26.8	0.3	0.15	5S-7001UC
5S-7002UC	15	32	9	0.3	0.15	7.35	2.56	750	261	4.35	440	9.7	57 200	93 200	7.7	1.3	0.027	20.9	19.7	26.1	28.5	17.5	29.5	30.8	0.3	0.15	5S-7002UC
5S-7003UC	17	35	10	0.3	0.15	9.10	3.15	930	320	5.30	540	9.6	51 700	84 200	8.5	1.8	0.033	23.0	21.6	29.0	32.0	19.5	32.5	33.8	0.3	0.15	5S-7003UC
5S-7004UC	20	42	12	0.6	0.3	12.3	4.55	1 250	465	7.70	785	9.8	42 700	69 500	10.3	2.9	0.060	28.1	26.4	34.9	38.4	24.5	37.5	39.5	0.6	0.3	5S-7004UC
5S-7005UC	25	47	12	0.6	0.3	13.6	5.55	1 390	565	9.40	960	10.2	37 300	60 800	10.9	3.3	0.071	32.6	30.9	39.4	42.9	29.5	42.5	44.5	0.6	0.3	5S-7005UC
5S-7006UC	30	55	13	1	0.6	17.5	7.65	1 790	780	13.0	1 320	10.3	31 200	50 900	12.3	4.8	0.10	39.2	37.3	46.9	50.6	35.5	49.5	50.5	1	0.6	5S-7006UC
5S-7007UC	35	62	14	1	0.6	22.1	10.1	2 260	1 030	17.2	1 750	10.4	27 700	45 100	13.5	6.3	0.13	44.2	42.2	52.8	57.0	40.5	56.5	57.5	1	0.6	5S-7007UC
5S-7008UC	40	68	15	1	0.6	23.7	11.7	2 410	1 190	19.9	2 020	10.6	24 900	40 500	14.8	7.4	0.17	49.7	47.7	58.3	62.5	45.5	62.5	63.5	1	0.6	5S-7008UC
5S-7009UC	45	75	16	1	0.6	28.1	14.1	2 860	1 440	24.1	2 460	10.7	22 400	36 500	16.1	9.4	0.21	55.3	53.0	64.7	69.3	50.5	69.5	70.5	1	0.6	5S-7009UC
5S-7010UC	50	80	16	1	0.6	29.8	16.0	3 050	1 630	27.3	2 780	10.9	20 700	33 700	16.8	11	0.23	60.3	58.0	69.7	74.3	55.5	74.5	75.5	1	0.6	5S-7010UC
5S-7011UC	55	90	18	1.1	0.6	39.0	20.9	4 000	2 140	35.5	3 650	10.7	18 500	30 200	18.8	16	0.33	66.9	64.3	78.1	83.5	62	83	85.5	1	0.6	5S-7011UC
5S-7012UC	60	95	18	1.1	0.6	40.0	22.4	4 100	2 280	38.0	3 900	10.9	17 300	28 300	19.4	17	0.36	71.9	69.3	83.1	88.5	67	88	90.5	1	0.6	5S-7012UC
5S-7013UC	65	100	18	1.1	0.6	42.5	24.9	4 300	2 540	42.5	4 350	11.0	16 300	26 500	20.1	18	0.38	76.9	74.3	88.1	93.5	72	93	95.5	1	0.6	5S-7013UC
5S-7014UC	70	110	20	1.1	0.6	53.5	31.5	5 450	3 200	53.5	5 450	10.9	14 900	24 300	22.1	24	0.53	83.6	80.5	96.4	102.6	77	103	105.5	1	0.6	5S-7014UC
5S-7015UC	75	115	20	1.1	0.6	55.0	33.0	5 600	3 400	56.5	5 750	11.0	14 100	23 000	22.8	26	0.56	88.6	85.5	101.4	107.6	82	108	110.5	1	0.6	5S-7015UC
5S-7016UC	80	125	22	1.1	0.6	67.0	40.0	6 850	4 100	68.5	7 000	10.9	13 100	21 400	24.8	34	0.74	95.2	91.7	109.8	116.8	87	118	120.5	1	0.6	5S-7016UC
5S-7017UC	85	130	22	1.1	0.6	69.0	42.5	7 000	4 350	72.5	7 400	11.0	12 500	20 400	25.5	36	0.78	100.2	96.7	114.8	121.8	92	123	125.5	1	0.6	5S-7017UC
5S-7018UC	90	140	24	1.5	1	82.0	50.5	8 350	5 150	86.0	8 750	10.9	11 700	19 000	27.5	47	1.00	106.9	103.0	123.2	131.0	98.5	131.5	134.5	1.5	1	5S-7018UC
5S-7019UC	95	145	24	1.5	1	84.0	53.0	8 550	5 400	90.5	9 250	11.0	11 200	18 200	28.2	49	1.04	111.9	108.0	128.2	136.0	103.5	136.5	139.5	1.5	1	5S-7019UC
5S-7020UC	100	150	24	1.5	1	86.0	56.0	8 750	5 700	95.5	9 750	11.1	10 800	17 500	28.8	51	1.09	116.9	113.0	133.2	140.9	108.5	141.5	144.5	1.5	1	5S-7020UC
5S-7021UC	105	160	26	2	1	101	65.0	10 300	6 600	111	11 300	11.0	10 100	16 500	30.8	70	1.34	123.5	119.2	141.5	150.1	115	150	154.5	2	1	5S-7021UC
5S-7022UC	110	170	28	2	1	116	74.0	11 800	7 500	126	12 800	10.9	9 600	15 600	32.9	83	1.69	130.2	125.4	149.9	159.3	120	160	164.5	2	1	5S-7022UC
5S-7024UC	120	180	28	2	1	118	78.5	12 000	8 000	134	13 600	11.1	9 000	14 600	34.2	90	1.80	140.2	135.4	159.9	169.3	130	170	174.5	2	1	5S-7024UC
5S-7026UC	130	200	33	2	1	148	99.5	15 100	10 200	170	17 300	11.0	8 100	13 300	38.7	131	2.80	153.9	148.5	176.2	186.9	140	190	194.5	2	1	5S-7026UC
5S-7028UC	140	210	33	2	1	151	105	15 400	10 700	179	18 300	11.1	7 600	12 500	40.1	144	2.90	164.0	158.7	186.3	196.8	150	200	204.5	2	1	5S-7028UC

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38							1.65	2.39
0.357	0.4							1.57	2.28
0.714	0.43							1.46	2.11
1.07	0.46							1.38	2
1.43	0.47							1.34	1.93
2.14	0.5	1	0	0.44	1.19	1	0.72	1.26	1.82
3.57	0.55				1.02			1.14	1.66
5.35	0.56				1			1.12	1.63
7.14	0.56				1			1.12	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

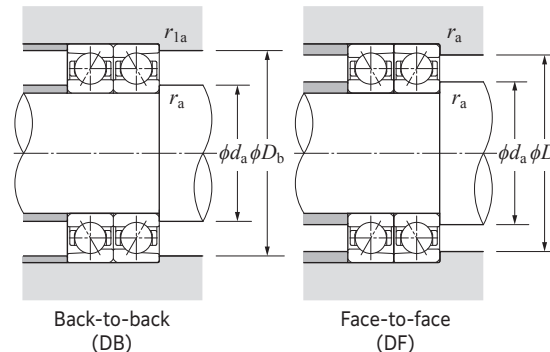


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (ceramic ball spec.)
5S-70U type



Contact angle 25° d 10–140 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kgf	dynamic kgf	static kN	kgf	min ⁻¹	min ⁻¹	mm				<i>d</i> _a mm	<i>D</i> _a mm	<i>D</i> _b mm	<i>r</i> _{as} mm	<i>r</i> _{1as} mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{1s min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	grease lubrication	oil lubrication	<i>a</i>				Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	min	max	max	
5S-7000UAD	10	26	8	0.3	0.15	5.70	1.66	580	169	3.30	340	65 800	107 900	8.2	0.9	0.017	15.2	14.0	20.4	22.7	12.5	23.5	24.8	0.3	0.15	5S-7000UAD
5S-7001UAD	12	28	8	0.3	0.15	6.20	1.95	630	199	3.70	380	57 100	93 700	8.8	1.0	0.018	17.9	16.7	23.1	25.4	14.5	25.5	26.8	0.3	0.15	5S-7001UAD
5S-7002UAD	15	32	9	0.3	0.15	7.00	2.45	715	250	4.45	455	49 800	81 800	10.0	1.3	0.027	20.9	19.7	26.1	28.5	17.5	29.5	30.8	0.3	0.15	5S-7002UAD
5S-7003UAD	17	35	10	0.3	0.15	8.75	3.00	890	305	5.80	590	45 000	73 900	11.1	1.8	0.033	23.0	21.6	29.0	32.0	19.5	32.5	33.8	0.3	0.15	5S-7003UAD
5S-7004UAD	20	42	12	0.6	0.3	11.8	4.35	1 200	445	8.45	865	37 200	61 000	13.4	2.9	0.060	28.1	26.4	34.9	38.3	24.5	37.5	39.5	0.6	0.3	5S-7004UAD
5S-7005UAD	25	47	12	0.6	0.3	13.0	5.30	1 320	540	9.90	1 010	32 500	53 400	14.5	3.3	0.071	32.6	30.9	39.4	42.8	29.5	42.5	44.5	0.6	0.3	5S-7005UAD
5S-7006UAD	30	55	13	1	0.6	16.7	7.30	1 700	745	13.8	1 400	27 200	44 700	16.6	4.8	0.10	39.2	37.3	46.9	50.6	35.5	49.5	50.5	1	0.6	5S-7006UAD
5S-7007UAD	35	62	14	1	0.6	21.0	9.65	2 140	980	17.1	1 740	24 100	39 600	18.4	6.3	0.13	44.2	42.2	52.8	56.9	40.5	56.5	57.5	1	0.6	5S-7007UAD
5S-7008UAD	40	68	15	1	0.6	22.5	11.1	2 290	1 130	19.3	1 970	21 700	35 600	20.2	7.4	0.17	49.7	47.7	58.3	62.5	45.5	62.5	63.5	1	0.6	5S-7008UAD
5S-7009UAD	45	75	16	1	0.6	26.6	13.4	2 710	1 370	23.8	2 430	19 500	32 000	22.1	9.4	0.21	55.3	53.0	64.7	69.3	50.5	69.5	70.5	1	0.6	5S-7009UAD
5S-7010UAD	50	80	16	1	0.6	28.2	15.2	2 880	1 550	26.5	2 710	18 000	29 600	23.2	11	0.23	60.3	58.0	69.7	74.3	55.5	74.5	75.5	1	0.6	5S-7010UAD
5S-7011UAD	55	90	18	1.1	0.6	37.0	19.9	3 800	2 030	34.5	3 500	16 200	26 500	26.0	16	0.33	66.9	64.3	78.1	83.5	62	83	85.5	1	0.6	5S-7011UAD
5S-7012UAD	60	95	18	1.1	0.6	38.0	21.2	3 900	2 170	36.0	3 700	15 100	24 800	27.2	17	0.36	71.9	69.3	83.1	88.4	67	88	90.5	1	0.6	5S-7012UAD
5S-7013UAD	65	100	18	1.1	0.6	40.0	23.6	4 100	2 410	40.0	4 050	14 200	23 300	28.3	18	0.38	76.9	74.3	88.1	93.4	72	93	95.5	1	0.6	5S-7013UAD
5S-7014UAD	70	110	20	1.1	0.6	51.0	29.7	5 200	3 050	52.0	5 300	13 000	21 400	31.1	24	0.53	83.6	80.5	96.4	102.6	77	103	105.5	1	0.6	5S-7014UAD
5S-7015UAD	75	115	20	1.1	0.6	52.0	31.5	5 300	3 200	54.5	5 550	12 300	20 200	32.3	26	0.56	88.6	85.5	101.4	107.6	82	108	110.5	1	0.6	5S-7015UAD
5S-7016UAD	80	125	22	1.1	0.6	63.5	38.0	6 500	3 900	65.5	6 700	11 400	18 800	35.0	34	0.74	95.2	91.7	109.8	116.8	87	118	120.5	1	0.6	5S-7016UAD
5S-7017UAD	85	130	22	1.1	0.6	65.0	40.5	6 650	4 100	68.5	7 000	10 900	17 900	36.2	36	0.78	100.2	96.7	114.8	121.7	92	123	125.5	1	0.6	5S-7017UAD
5S-7018UAD	90	140	24	1.5	1	77.5	48.0	7 900	4 850	84.0	8 550	10 200	16 700	39.0	47	1.00	106.9	103.0	123.2	130.9	98.5	131.5	134.5	1.5	1	5S-7018UAD
5S-7019UAD	95	145	24	1.5	1	79.5	50.5	8 100	5 150	88.0	8 950	9 800	16 000	40.1	49	1.04	111.9	108.0	128.2	135.9	103.5	136.5	139.5	1.5	1	5S-7019UAD
5S-7020UAD	100	150	24	1.5	1	81.0	53.0	8 300	5 400	92.0	9 350	9 400	15 400	41.3	51	1.09	116.9	113.0	133.2	140.9	108.5	141.5	144.5	1.5	1	5S-7020UAD
5S-7021UAD	105	160	26	2	1	95.0	61.5	9 700	6 300	106	10 800	8 800	14 500	44.1	70	1.34	123.5	119.2	141.5	150.1	115	150	154.5	2	1	5S-7021UAD
5S-7022UAD	110	170	28	2	1	109	70.0	11 200	7 150	123	12 500	8 400	13 700	46.8	83	1.69	130.2	125.4	149.9	159.2	120	160	164.5	2	1	5S-7022UAD
5S-7024UAD	120	180	28	2	1	111	74.5	11 400	7 600	129	13 200	7 800	12 800	49.2	90	1.80	140.2	135.4	159.9	169.2	130	170	174.5	2	1	5S-7024UAD
5S-7026UAD	130	200	33	2	1	140	94.5	14 200	9 650	164	16 700	7 100	11 600	55.2	131	2.80	153.9	148.5	176.2	186.8	140	190	194.5	2	1	5S-7026UAD
5S-7028UAD	140	210	33	2	1	142	100	14 500	10 200	170	17 300	6 700	11 000	57.5	144	2.90	164.0	158.7	186.3	196.8	150	200	204.5	2	1	5S-7028UAD

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.38		1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

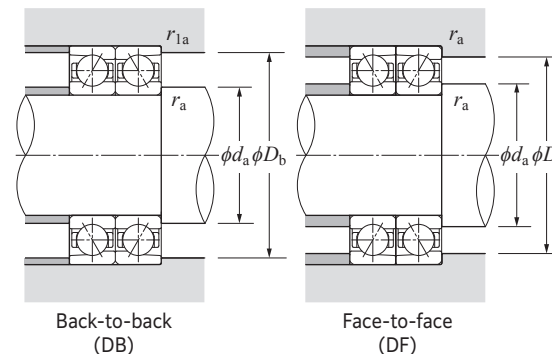


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Standard angular contact ball bearings (ceramic ball spec.)
5S-70U type



Contact angle 30° d 10–140 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					Part number		
	mm					dynamic kN	static kgf	dynamic kgf	static	kN	kgf	min ⁻¹	grease				oil	mm				mm	mm	mm	mm		mm	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{1s}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	lubrication	lubrication	<i>a</i>				Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>D</i> _a max	<i>D</i> _b max		<i>r</i> _{as} max	<i>r</i> _{1as} max
5S-7000U	10	26	8	0.3	0.15	5.55	1.62	565	165	2.54	259	52 600	70 100	9.2	0.9	0.017	15.2	14.0	20.4	22.7	12.5	23.5	24.8	0.3	0.15	5S-7000U		
5S-7001U	12	28	8	0.3	0.15	6.00	1.90	615	193	2.84	289	45 700	60 900	10.0	1.0	0.018	17.9	16.7	23.1	25.4	14.5	25.5	26.8	0.3	0.15	5S-7001U		
5S-7002U	15	32	9	0.3	0.15	6.80	2.38	690	242	3.40	350	39 900	53 100	11.3	1.3	0.027	20.9	19.7	26.1	28.4	17.5	29.5	30.8	0.3	0.15	5S-7002U		
5S-7003U	17	35	10	0.3	0.15	8.45	2.92	865	298	4.45	455	36 000	48 000	12.6	1.8	0.033	23.0	21.6	29.0	31.9	19.5	32.5	33.8	0.3	0.15	5S-7003U		
5S-7004U	20	42	12	0.6	0.3	11.4	4.25	1 160	430	6.55	670	29 700	39 600	15.2	2.9	0.060	28.1	26.4	34.9	38.3	24.5	37.5	39.5	0.6	0.3	5S-7004U		
5S-7005U	25	47	12	0.6	0.3	12.5	5.10	1 280	520	7.65	780	26 000	34 700	16.5	3.3	0.071	32.6	30.9	39.4	42.8	29.5	42.5	44.5	0.6	0.3	5S-7005U		
5S-7006U	30	55	13	1	0.6	16.1	7.05	1 640	715	10.7	1 090	21 800	29 000	19.0	4.8	0.10	39.2	37.3	46.9	50.6	35.5	49.5	50.5	1	0.6	5S-7006U		
5S-7007U	35	62	14	1	0.6	20.3	9.30	2 070	950	13.2	1 340	19 300	25 700	21.1	6.3	0.13	44.2	42.2	52.8	56.9	40.5	56.5	57.5	1	0.6	5S-7007U		
5S-7008U	40	68	15	1	0.6	21.6	10.7	2 200	1 090	14.8	1 510	17 400	23 100	23.2	7.4	0.17	49.7	47.7	58.3	62.4	45.5	62.5	63.5	1	0.6	5S-7008U		
5S-7009U	45	75	16	1	0.6	25.6	13.0	2 610	1 320	18.4	1 870	15 600	20 800	25.4	9.4	0.21	55.3	53.0	64.7	69.3	50.5	69.5	70.5	1	0.6	5S-7009U		
5S-7010U	50	80	16	1	0.6	27.1	14.6	2 760	1 490	20.5	2 090	14 400	19 200	26.9	11	0.23	60.3	58.0	69.7	74.3	55.5	74.5	75.5	1	0.6	5S-7010U		
5S-7011U	55	90	18	1.1	0.6	35.5	19.2	3 650	1 960	26.3	2 680	12 900	17 200	30.1	16	0.33	66.9	64.3	78.1	83.4	62	83	85.5	1	0.6	5S-7011U		
5S-7012U	60	95	18	1.1	0.6	36.5	20.5	3 750	2 090	27.7	2 830	12 100	16 100	31.5	17	0.36	71.9	69.3	83.1	88.4	67	88	90.5	1	0.6	5S-7012U		
5S-7013U	65	100	18	1.1	0.6	38.5	22.8	3 950	2 320	30.5	3 100	11 400	15 100	32.9	18	0.38	76.9	74.3	88.1	93.4	72	93	95.5	1	0.6	5S-7013U		
5S-7014U	70	110	20	1.1	0.6	49.0	28.6	5 000	2 920	40.0	4 100	10 400	13 900	36.1	24	0.53	83.6	80.5	96.4	102.5	77	103	105.5	1	0.6	5S-7014U		
5S-7015U	75	115	20	1.1	0.6	50.0	30.5	5 100	3 100	42.0	4 300	9 900	13 100	37.6	26	0.56	88.6	85.5	101.4	107.5	82	108	110.5	1	0.6	5S-7015U		
5S-7016U	80	125	22	1.1	0.6	61.0	37.0	6 250	3 750	50.5	5 150	9 100	12 200	40.8	34	0.74	95.2	91.7	109.8	116.7	87	118	120.5	1	0.6	5S-7016U		
5S-7017U	85	130	22	1.1	0.6	62.5	39.0	6 350	3 950	53.0	5 400	8 700	11 600	42.2	36	0.78	100.2	96.7	114.8	121.7	92	123	125.5	1	0.6	5S-7017U		
5S-7018U	90	140	24	1.5	1	74.5	46.0	7 600	4 700	64.5	6 600	8 200	10 900	45.4	47	1.00	106.9	103.0	123.2	130.8	98.5	131.5	134.5	1.5	1	5S-7018U		
5S-7019U	95	145	24	1.5	1	76.5	48.5	7 800	4 950	68.0	6 900	7 800	10 400	46.8	49	1.04	111.9	108.0	128.2	135.8	103.5	136.5	139.5	1.5	1	5S-7019U		
5S-7020U	100	150	24	1.5	1	78.0	51.0	7 950	5 200	71.0	7 250	7 500	10 000	48.3	51	1.09	116.9	113.0	133.2	140.8	108.5	141.5	144.5	1.5	1	5S-7020U		
5S-7021U	105	160	26	2	1	91.5	59.5	9 300	6 050	81.0	8 300	7 100	9 400	51.5	70	1.34	123.5	119.2	141.5	150.0	115	150	154.5	2	1	5S-7021U		
5S-7022U	110	170	28	2	1	105	67.5	10 700	6 900	95.0	9 700	6 700	8 900	54.6	83	1.69	130.2	125.4	149.9	159.1	120	160	164.5	2	1	5S-7022U		
5S-7024U	120	180	28	2	1	107	71.5	10 900	7 300	99.5	10 200	6 200	8 300	57.5	90	1.80	140.2	135.4	159.9	169.1	130	170	174.5	2	1	5S-7024U		
5S-7026U	130	200	33	2	1	134	91.0	13 700	9 300	126	12 900	5 700	7 600	64.4	131	2.80	153.9	148.5	176.2	186.7	140	190	194.5	2	1	5S-7026U		
5S-7028U	140	210	33	2	1	137	96.0	13 900	9 800	130	13 300	5 300	7 100	67.3	144	2.90	164.0	158.7	186.3	196.7	150	200	204.5	2	1	5S-7028U		

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.8	1	0	0.39	0.76	1	0.78	0.63	1.24

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.33		1	0.66

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

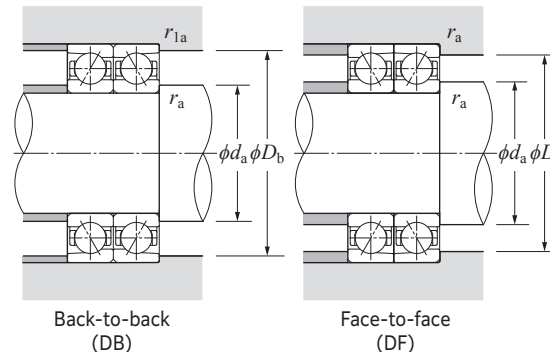


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (steel ball spec.)
2LA-HSE9U type



Contact angle 15° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions					
	mm					dynamic kN		dynamic kgf		kN	kgf		min ⁻¹					mm	mm								
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ⁽¹⁾	<i>r</i> _{ls min} ⁽¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀		grease lubrication	oil lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max
2LA-HSE910UC	50	72	12	0.6	0.3	12.1	8.10	1 240	830	11.8	1 210	10.9	21 800	34 600	14.2	6.0	0.13	57.6	56.6	64.4	66.8	54.5	52.5	67.5	69.5	0.6	0.3
2LA-HSE911UC	55	80	13	1	0.6	15.1	10.1	1 540	1 030	14.8	1 510	10.8	19 700	31 300	15.6	7.7	0.18	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6
2LA-HSE912UC	60	85	13	1	0.6	15.7	11.1	1 600	1 130	16.2	1 660	10.9	18 300	29 100	16.3	8.3	0.20	68.6	67.4	76.4	79.1	65.5	64.5	79.5	80.5	1	0.6
2LA-HSE913UC	65	90	13	1	0.6	15.8	11.6	1 620	1 180	17.0	1 740	11.0	17 200	27 200	17.0	8.9	0.21	73.6	72.4	81.4	84.1	70.5	69.5	84.5	85.5	1	0.6
2LA-HSE914UC	70	100	16	1	0.6	23.2	16.5	2 370	1 680	24.2	2 470	10.9	15 600	24 800	19.5	14	0.34	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6
2LA-HSE915UC	75	105	16	1	0.6	24.1	18.0	2 460	1 830	26.3	2 690	10.9	14 800	23 400	20.1	15	0.36	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6
2LA-HSE916UC	80	110	16	1	0.6	24.4	18.8	2 490	1 910	27.5	2 810	11.0	14 000	22 200	20.8	16	0.38	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6
2LA-HSE917UC	85	120	18	1.1	0.6	33.0	24.8	3 350	2 520	36.0	3 700	10.9	13 000	20 600	22.8	22	0.54	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6
2LA-HSE918UC	90	125	18	1.1	0.6	34.5	26.8	3 500	2 740	39.0	4 000	10.9	12 400	19 600	23.5	23	0.56	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6
2LA-HSE919UC	95	130	18	1.1	0.6	35.0	27.9	3 550	2 850	40.5	4 150	11.0	11 800	18 800	24.2	24	0.59	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6
2LA-HSE920UC	100	140	20	1.1	0.6	40.5	32.5	4 100	3 350	48.0	4 900	11.0	11 100	17 600	26.2	32	0.82	113.8	111.7	126.2	130.7	107	104.5	133	135.5	1	0.6
2LA-HSE921UC	105	145	20	1.1	0.6	41.0	34.0	4 150	3 450	50.0	5 100	11.0	10 600	16 900	26.9	33	0.85	118.8	116.7	131.2	135.7	112	109.5	138	140.5	1	0.6
2LA-HSE922UC	110	150	20	1.1	0.6	41.5	35.5	4 200	3 600	51.0	5 250	11.1	10 200	16 200	27.5	35	0.88	123.8	121.7	136.2	140.7	117	114.5	143	145.5	1	0.6
2LA-HSE924UC	120	165	22	1.1	0.6	53.0	45.0	5 400	4 600	66.0	6 750	11.0	9 300	14 800	30.2	47	1.20	135.4	133.0	149.6	154.8	127	124.5	158	160.5	1	0.6
2LA-HSE926UC	130	180	24	1.5	1	65.5	56.0	6 700	5 700	81.5	8 350	11.0	8 600	13 600	32.9	62	1.56	146.9	144.2	163.1	168.9	138.5	135.5	171.5	174.5	1.5	1
2LA-HSE928UC	140	190	24	1.5	1	66.0	58.0	6 750	5 950	85.0	8 700	11.0	8 100	12 800	34.3	66	1.66	156.9	154.2	173.1	178.9	148.5	145.5	181.5	184.5	1.5	1
2LA-HSE930UC	150	210	28	2	1	88.0	77.0	8 950	7 850	112	11 500	10.9	7 400	11 700	38.3	99	2.58	170.5	167.3	189.5	196.4	160	155.5	200	204.5	2	1
2LA-HSE932UC	160	220	28	2	1	89.0	80.5	9 050	8 200	117	12 000	11.0	7 000	11 100	39.6	105	2.71	180.5	177.3	199.5	206.3	170	165.5	210	214.5	2	1
2LA-HSE934UC	170	230	28	2	1	89.5	83.5	9 150	8 500	122	12 500	11.1	6 700	10 600	41.0	111	2.84	190.5	187.3	209.5	216.3	180	175.5	220	224.5	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads


Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57			1.76	2.56
0.357	0.36				1.53			1.71	2.48
0.714	0.38				1.46			1.64	2.38
1.07	0.4				1.42			1.59	2.31
1.43	0.41	1	0	0.44	1.38	1	0.72	1.55	2.25
2.14	0.43				1.33			1.49	2.16
3.57	0.44				1.25			1.4	2.03
5.35	0.47				1.18			1.32	1.92
7.14	0.49				1.13			1.26	1.83

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

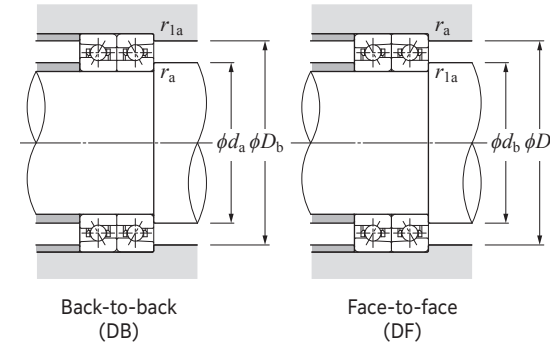

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (steel ball spec.)
2LA-HSE9U type



Contact angle 20° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf	min ⁻¹	min ⁻¹				mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁽¹⁾	<i>r_{ls}</i> min ⁽¹⁾	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	grease lubrication	oil lubrication	<i>a</i>				Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>D</i> _b max
2LA-HSE910U	50	72	12	0.6	0.3	11.8	7.95	1 210	810	13.2	1 350	23 100	37 200	17.2	6.0	0.13	57.6	56.6	64.4	66.8	54.5	52.5	67.5	69.5	0.6	0.3
2LA-HSE911U	55	80	13	1	0.6	14.7	9.90	1 500	1 010	16.5	1 690	20 800	33 600	18.9	7.7	0.18	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6
2LA-HSE912U	60	85	13	1	0.6	15.3	10.8	1 560	1 100	18.1	1 850	19 400	31 300	19.8	8.3	0.20	68.6	67.4	76.4	79.1	65.5	64.5	79.5	80.5	1	0.6
2LA-HSE913U	65	90	13	1	0.6	15.4	11.3	1 570	1 150	18.9	1 930	18 200	29 300	20.7	8.9	0.21	73.6	72.4	81.4	84.0	70.5	69.5	84.5	85.5	1	0.6
2LA-HSE914U	70	100	16	1	0.6	22.6	16.1	2 310	1 640	26.9	2 750	16 600	26 700	23.6	14	0.34	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6
2LA-HSE915U	75	105	16	1	0.6	23.5	17.5	2 390	1 790	29.4	3 000	15 600	25 200	24.5	15	0.36	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6
2LA-HSE916U	80	110	16	1	0.6	23.7	18.3	2 420	1 870	30.0	3 100	14 800	23 900	25.4	16	0.38	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6
2LA-HSE917U	85	120	18	1.1	0.6	32.0	24.2	3 300	2 470	40.0	4 100	13 700	22 100	27.8	22	0.54	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6
2LA-HSE918U	90	125	18	1.1	0.6	33.5	26.2	3 400	2 670	43.5	4 450	13 100	21 100	28.7	23	0.56	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6
2LA-HSE919U	95	130	18	1.1	0.6	34.0	27.3	3 450	2 780	45.5	4 650	12 500	20 200	29.6	24	0.59	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6
2LA-HSE920U	100	140	20	1.1	0.6	39.5	32.0	4 000	3 250	53.0	5 450	11 700	18 900	32.0	32	0.82	113.8	111.7	126.2	130.6	107	104.5	133	135.5	1	0.6
2LA-HSE921U	105	145	20	1.1	0.6	40.0	33.0	4 050	3 400	55.0	5 650	11 300	18 200	32.9	33	0.85	118.8	116.7	131.2	135.6	112	109.5	138	140.5	1	0.6
2LA-HSE922U	110	150	20	1.1	0.6	40.0	34.5	4 100	3 500	57.0	5 850	10 800	17 500	33.8	35	0.88	123.8	121.7	136.2	140.6	117	114.5	143	145.5	1	0.6
2LA-HSE924U	120	165	22	1.1	0.6	51.5	44.0	5 250	4 500	74.0	7 550	9 900	15 900	37.1	47	1.20	135.4	133.0	149.6	154.7	127	124.5	158	160.5	1	0.6
2LA-HSE926U	130	180	24	1.5	1	64.0	54.5	6 500	5 550	91.0	9 300	9 100	14 600	40.4	62	1.56	146.9	144.2	163.1	168.9	138.5	135.5	171.5	174.5	1.5	1
2LA-HSE928U	140	190	24	1.5	1	64.5	57.0	6 550	5 800	95.0	9 700	8 500	13 800	42.2	66	1.66	156.9	154.2	173.1	178.8	148.5	145.5	181.5	184.5	1.5	1
2LA-HSE930U	150	210	28	2	1	86.0	75.5	8 750	7 700	125	12 800	7 800	12 600	47.0	99	2.58	170.5	167.3	189.5	196.3	160	155.5	200	204.5	2	1
2LA-HSE932U	160	220	28	2	1	86.5	78.5	8 850	8 000	131	13 400	7 400	11 900	48.8	105	2.71	180.5	177.3	199.5	206.3	170	165.5	210	214.5	2	1
2LA-HSE934U	170	230	28	2	1	87.5	81.5	8 900	8 300	136	13 900	7 000	11 300	50.6	111	2.84	190.5	187.3	209.5	216.3	180	175.5	220	224.5	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

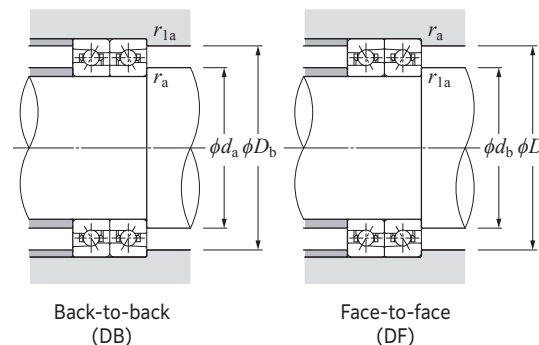


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (steel ball spec.)
2LA-HSE9U type



Contact angle 25° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf	min ⁻¹	min ⁻¹				mm				mm					
	d	D	B	r_s min ¹⁾	r_{ls} min ¹⁾	C_r	C_{Or}	C_r	C_{Or}	(static)	grease lubrication	oil lubrication					d_1	d_2	D_1	D_2	d_a min	d_b min	D_a max	D_b max	r_{as} max	r_{las} max
2LA-HSE910UAD	50	72	12	0.6	0.3	11.4	7.70	1 170	785	14.8	1 510	20 500	32 100	20.3	6.0	0.13	57.6	56.6	64.4	66.7	54.5	52.5	67.5	69.5	0.6	0.3
2LA-HSE911UAD	55	80	13	1	0.6	14.3	9.60	1 450	980	18.4	1 880	18 500	29 000	22.4	7.7	0.18	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6
2LA-HSE912UAD	60	85	13	1	0.6	14.8	10.5	1 510	1 070	20.2	2 060	17 200	27 000	23.5	8.3	0.20	68.6	67.4	76.4	79.0	65.5	64.5	79.5	80.5	1	0.6
2LA-HSE913UAD	65	90	13	1	0.6	14.9	11.0	1 520	1 120	21.1	2 160	16 100	25 300	24.7	8.9	0.21	73.6	72.4	81.4	84.0	70.5	69.5	84.5	85.5	1	0.6
2LA-HSE914UAD	70	100	16	1	0.6	21.9	15.6	2 230	1 590	29.9	3 050	14 700	23 000	28.0	14	0.34	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6
2LA-HSE915UAD	75	105	16	1	0.6	22.7	17.0	2 310	1 730	32.0	3 300	13 900	21 700	29.1	15	0.36	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6
2LA-HSE916UAD	80	110	16	1	0.6	23.0	17.7	2 340	1 810	33.5	3 450	13 200	20 600	30.3	16	0.38	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6
2LA-HSE917UAD	85	120	18	1.1	0.6	31.0	23.4	3 150	2 390	45.0	4 600	12 200	19 100	33.1	22	0.54	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6
2LA-HSE918UAD	90	125	18	1.1	0.6	32.5	25.4	3 300	2 590	48.5	4 950	11 600	18 200	34.2	23	0.56	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6
2LA-HSE919UAD	95	130	18	1.1	0.6	32.5	26.4	3 350	2 690	50.5	5 200	11 100	17 400	35.4	24	0.59	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6
2LA-HSE920UAD	100	140	20	1.1	0.6	38.0	31.0	3 850	3 150	59.0	6 050	10 400	16 300	38.2	32	0.82	113.8	111.7	126.2	130.6	107	104.5	133	135.5	1	0.6
2LA-HSE921UAD	105	145	20	1.1	0.6	38.5	32.0	3 900	3 300	61.5	6 300	10 000	15 700	39.3	33	0.85	118.8	116.7	131.2	135.6	112	109.5	138	140.5	1	0.6
2LA-HSE922UAD	110	150	20	1.1	0.6	39.0	33.5	3 950	3 400	64.0	6 550	9 600	15 100	40.5	35	0.88	123.8	121.7	136.2	140.6	117	114.5	143	145.5	1	0.6
2LA-HSE924UAD	120	165	22	1.1	0.6	50.0	42.5	5 100	4 350	82.0	8 400	8 800	13 700	44.4	47	1.20	135.4	133.0	149.6	154.7	127	124.5	158	160.5	1	0.6
2LA-HSE926UAD	130	180	24	1.5	1	61.5	53.0	6 300	5 400	101	10 400	8 100	12 600	48.4	62	1.56	146.9	144.2	163.1	168.8	138.5	135.5	171.5	174.5	1.5	1
2LA-HSE928UAD	140	190	24	1.5	1	62.0	55.0	6 350	5 600	105	10 800	7 600	11 900	50.7	66	1.66	156.9	154.2	173.1	178.8	148.5	145.5	181.5	184.5	1.5	1
2LA-HSE930UAD	150	210	28	2	1	83.0	73.0	8 450	7 450	140	14 300	6 900	10 900	56.3	99	2.58	170.5	167.3	189.5	196.3	160	155.5	200	204.5	2	1
2LA-HSE932UAD	160	220	28	2	1	83.5	76.0	8 550	7 750	146	14 900	6 600	10 300	58.6	105	2.71	180.5	177.3	199.5	206.3	170	165.5	210	214.5	2	1
2LA-HSE934UAD	170	230	28	2	1	84.5	79.0	8 600	8 050	152	15 500	6 200	9 800	60.9	111	2.84	190.5	187.3	209.5	216.3	180	175.5	220	224.5	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

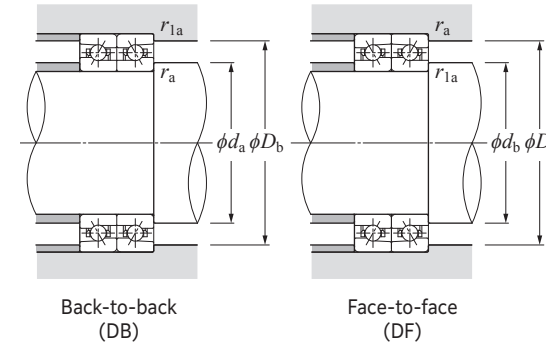


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (steel ball spec.)
2LA-HSE0 type



Contact angle 15° d 50–170 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions						
	mm						dynamic kN	static	dynamic	static	kN	kgf		min ⁻¹	grease lubrication				oil lubrication	mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{l min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀				<i>d</i> ₁				<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>d</i> _{b min}	<i>D</i> _{a max}	<i>D</i> _{b max}	<i>r</i> _{as max}	<i>r</i> _{las max}		
2LA-HSE010C	50	80	16	1	0.6	17.6	11.4	1 800	1 160	16.7	1 700	10.4	20 500	32 500	16.8	12	0.26	60.1	58.6	69.9	73.3	55.5	54.5	74.5	75.5	1	0.6		
2LA-HSE011C	55	90	18	1.1	0.6	19.1	13.6	1 950	1 380	19.9	2 030	10.6	18 300	29 100	18.8	16	0.40	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6		
2LA-HSE012C	60	95	18	1.1	0.6	20.0	15.0	2 040	1 530	22.0	2 240	10.7	17 200	27 200	19.5	17	0.42	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6		
2LA-HSE013C	65	100	18	1.1	0.6	20.3	15.8	2 070	1 610	23.2	2 360	10.8	16 100	25 600	20.1	18	0.45	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6		
2LA-HSE014C	70	110	20	1.1	0.6	24.9	19.9	2 540	2 030	29.2	2 980	10.8	14 800	23 400	22.2	24	0.64	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6		
2LA-HSE015C	75	115	20	1.1	0.6	26.5	22.4	2 700	2 290	33.0	3 350	10.9	14 000	22 200	22.8	25	0.68	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6		
2LA-HSE016C	80	125	22	1.1	0.6	30.5	25.7	3 100	2 620	38.0	3 850	10.9	13 000	20 600	24.8	34	0.91	96.8	94.9	108.2	112.5	87	84.5	118	120.5	1	0.6		
2LA-HSE017C	85	130	22	1.1	0.6	30.5	26.8	3 150	2 740	39.5	4 000	10.9	12 400	19 600	25.5	35	0.96	101.8	99.9	113.2	117.5	92	89.5	123	125.5	1	0.6		
2LA-HSE018C	90	140	24	1.5	1	35.5	31.5	3 650	3 200	46.0	4 700	10.9	11 600	18 300	27.5	45	1.25	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1		
2LA-HSE019C	95	145	24	1.5	1	36.0	32.5	3 700	3 350	48.0	4 900	11.0	11 100	17 600	28.2	47	1.30	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1		
2LA-HSE020C	100	150	24	1.5	1	37.5	35.0	3 800	3 600	51.5	5 250	11.0	10 600	16 900	28.9	49	1.36	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1		
2LA-HSE021C	105	160	26	2	1	43.0	40.5	4 350	4 150	60.0	6 100	11.0	10 000	15 900	30.9	61	1.73	125.8	123.6	139.2	144.1	115	110.5	150	154.5	2	1		
2LA-HSE022C	110	170	28	2	1	53.0	49.5	5 400	5 000	72.5	7 400	10.9	9 500	15 100	32.9	77	2.13	132.4	129.8	147.6	153.3	120	115.5	160	164.5	2	1		
2LA-HSE024C	120	180	28	2	1	53.5	51.5	5 450	5 250	75.5	7 700	11.0	8 900	14 100	34.2	82	2.28	142.4	139.8	157.6	163.3	130	125.5	170	174.5	2	1		
2LA-HSE026C	130	200	33	2	1	76.5	71.0	7 800	7 250	104	10 600	10.8	8 100	12 800	38.8	130	3.40	155.5	152.3	174.5	181.6	140	135.5	190	194.5	2	1		
2LA-HSE028C	140	210	33	2	1	79.5	77.0	8 100	7 850	113	11 500	10.9	7 600	12 100	40.1	129	3.68	165.5	162.4	184.5	191.5	150	145.5	200	204.5	2	1		
2LA-HSE030C	150	225	35	2.1	1.1	81.5	83.0	8 300	8 450	122	12 400	11.0	7 100	11 300	42.8	163	4.46	178.0	174.8	197.0	204.1	162	157	213	218	2	1		
2LA-HSE032C	160	240	38	2.1	1.1	95.5	97.0	9 750	9 850	142	14 500	11.0	6 700	10 600	46.0	206	5.46	189.5	186.0	210.5	218.2	172	167	228	233	2	1		
2LA-HSE034C	170	260	42	2.1	1.1	110	111	11 200	11 300	163	16 700	10.9	6 200	9 800	50.0	272	7.37	203.6	199.8	226.4	234.9	182	177	248	253	2	1		

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57			1.76	2.56
0.357	0.36				1.53			1.71	2.48
0.714	0.38				1.46			1.64	2.38
1.07	0.4				1.42			1.59	2.31
1.43	0.41	1	0	0.44	1.38	1	0.72	1.55	2.25
2.14	0.43				1.33			1.49	2.16
3.57	0.44				1.25			1.4	2.03
5.35	0.47				1.18			1.32	1.92
7.14	0.49				1.13			1.26	1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

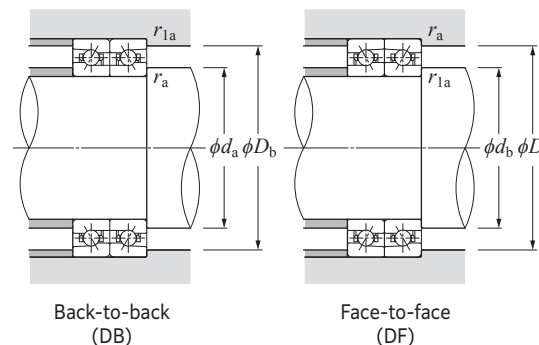

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (steel ball spec.)
2LA-HSE0 type



Contact angle 20° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm					dynamic kN	static kgf	dynamic kgf	static kN	kN	kgf	min ⁻¹	min ⁻¹				mm				mm					
	d	D	B	$r_s \min^{1)}$	$r_{is} \min^{1)}$	C_r	C_{0r}	C_r	C_{0r}	(static)		grease lubrication	oil lubrication				d_1	d_2	D_1	D_2	$d_a \min$	$d_b \min$	$D_a \max$	$D_b \max$	$r_{as} \max$	$r_{las} \max$
2LA-HSE010	50	80	16	1	0.6	17.2	11.2	1 750	1 140	18.7	1 900	21 600	34 900	19.9	12	0.26	60.1	58.6	69.9	73.2	55.5	54.5	74.5	75.5	1	0.6
2LA-HSE011	55	90	18	1.1	0.6	18.7	13.3	1 900	1 350	22.2	2 260	19 400	31 300	22.3	16	0.40	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6
2LA-HSE012	60	95	18	1.1	0.6	19.5	14.7	1 990	1 490	24.6	2 500	18 200	29 300	23.2	17	0.42	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6
2LA-HSE013	65	100	18	1.1	0.6	19.8	15.4	2 020	1 570	25.9	2 640	17 100	27 500	24.1	18	0.45	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6
2LA-HSE014	70	110	20	1.1	0.6	24.2	19.4	2 470	1 980	32.5	3 300	15 600	25 200	26.5	24	0.64	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6
2LA-HSE015	75	115	20	1.1	0.6	25.8	21.9	2 630	2 230	36.5	3 750	14 800	23 900	27.4	25	0.68	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6
2LA-HSE016	80	125	22	1.1	0.6	29.6	25.1	3 000	2 560	42.0	4 300	13 700	22 100	29.8	34	0.91	96.8	94.9	108.2	112.5	87	84.5	118	120.5	1	0.6
2LA-HSE017	85	130	22	1.1	0.6	30.0	26.2	3 050	2 670	44.0	4 500	13 100	21 100	30.7	35	0.96	101.8	99.9	113.2	117.4	92	89.5	123	125.5	1	0.6
2LA-HSE018	90	140	24	1.5	1	34.5	30.5	3 550	3 150	51.5	5 250	12 200	19 700	33.1	45	1.25	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1
2LA-HSE019	95	145	24	1.5	1	35.0	32.0	3 600	3 250	53.5	5 450	11 700	18 900	34.0	47	1.30	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1
2LA-HSE020	100	150	24	1.5	1	36.5	34.5	3 700	3 500	57.5	5 850	11 300	18 200	34.9	49	1.36	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1
2LA-HSE021	105	160	26	2	1	42.0	39.5	4 250	4 050	66.5	6 800	10 600	17 100	37.3	61	1.73	125.8	123.6	139.2	144.1	115	110.5	150	154.5	2	1
2LA-HSE022	110	170	28	2	1	51.5	48.0	5 300	4 900	80.5	8 200	10 000	16 200	39.7	77	2.13	132.4	129.8	147.6	153.2	120	115.5	160	164.5	2	1
2LA-HSE024	120	180	28	2	1	52.0	50.0	5 300	5 100	84.0	8 600	9 400	15 100	41.5	82	2.28	142.4	139.8	157.6	163.2	130	125.5	170	174.5	2	1
2LA-HSE026	130	200	33	2	1	74.5	69.5	7 600	7 100	116	11 900	8 500	13 800	46.8	130	3.40	155.5	152.3	174.5	181.5	140	135.5	190	194.5	2	1
2LA-HSE028	140	210	33	2	1	77.5	75.0	7 900	7 650	126	12 800	8 000	13 000	48.6	129	3.68	165.5	162.4	184.5	191.5	150	145.5	200	204.5	2	1
2LA-HSE030	150	225	35	2.1	1.1	79.5	81.0	8 100	8 250	136	13 900	7 500	12 100	51.9	163	4.46	178.0	174.8	197.0	204.0	162	157	213	218	2	1
2LA-HSE032	160	240	38	2.1	1.1	93.0	94.5	9 500	9 650	159	16 200	7 000	11 300	55.7	206	5.46	189.5	186.0	210.5	218.2	172	167	228	233	2	1
2LA-HSE034	170	260	42	2.1	1.1	107	108	10 900	11 100	182	18 600	6 500	10 600	60.4	272	7.37	203.6	199.8	226.4	234.9	182	177	248	253	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

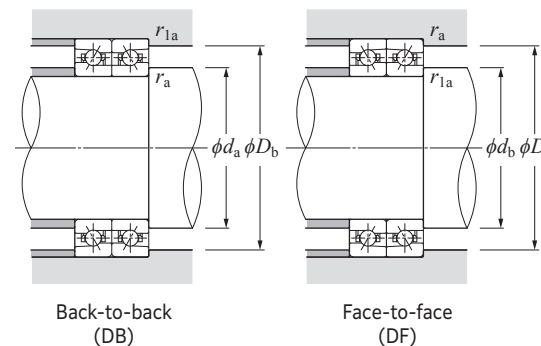


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (steel ball spec.)
2LA-HSE0 type



Contact angle 25° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf	min ⁻¹					mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{1s}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	grease lubrication	oil lubrication	<i>a</i>				Single-row (approx.)	kg (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d_a</i> min	<i>d_b</i> min	<i>D_a</i> max	<i>D_b</i> max
2LA-HSE010AD	50	80	16	1	0.6	16.6	10.8	1 700	1 100	20.9	2 130	19 200	30 100	23.3	12	0.26	60.1	58.6	69.9	73.2	55.5	54.5	74.5	75.5	1	0.6
2LA-HSE011AD	55	90	18	1.1	0.6	18.1	12.9	1 840	1 310	24.8	2 530	17 200	27 000	26.1	16	0.40	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6
2LA-HSE012AD	60	95	18	1.1	0.6	18.9	14.2	1 930	1 450	27.4	2 800	16 100	25 300	27.2	17	0.42	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6
2LA-HSE013AD	65	100	18	1.1	0.6	19.2	14.9	1 960	1 520	28.9	2 940	15 100	23 700	28.4	18	0.45	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6
2LA-HSE014AD	70	110	20	1.1	0.6	23.4	18.8	2 390	1 920	36.5	3 700	13 900	21 700	31.1	24	0.64	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6
2LA-HSE015AD	75	115	20	1.1	0.6	25.0	21.2	2 550	2 160	41.0	4 200	13 200	20 600	32.3	25	0.68	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6
2LA-HSE016AD	80	125	22	1.1	0.6	28.6	24.3	2 910	2 480	47.0	4 800	12 200	19 100	35.1	34	0.91	96.8	94.9	108.2	112.4	87	84.5	118	120.5	1	0.6
2LA-HSE017AD	85	130	22	1.1	0.6	28.9	25.4	2 950	2 590	49.0	5 000	11 600	18 200	36.2	35	0.96	101.8	99.9	113.2	117.4	92	89.5	123	125.5	1	0.6
2LA-HSE018AD	90	140	24	1.5	1	33.5	29.7	3 400	3 050	57.5	5 850	10 900	17 000	39.0	45	1.25	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1
2LA-HSE019AD	95	145	24	1.5	1	34.0	31.0	3 450	3 150	60.0	6 100	10 400	16 300	40.2	47	1.30	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1
2LA-HSE020AD	100	150	24	1.5	1	35.0	33.0	3 600	3 400	64.0	6 550	10 000	15 700	41.3	49	1.36	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1
2LA-HSE021AD	105	160	26	2	1	40.5	38.5	4 100	3 900	74.5	7 600	9 400	14 800	44.1	61	1.73	125.8	123.6	139.2	144.1	115	110.5	150	154.5	2	1
2LA-HSE022AD	110	170	28	2	1	50.0	46.5	5 100	4 750	90.0	9 150	8 900	14 000	46.9	77	2.13	132.4	129.8	147.6	153.2	120	115.5	160	164.5	2	1
2LA-HSE024AD	120	180	28	2	1	50.5	48.5	5 150	4 950	94.0	9 550	8 300	13 000	49.2	82	2.28	142.4	139.8	157.6	163.2	130	125.5	170	174.5	2	1
2LA-HSE026AD	130	200	33	2	1	72.5	67.5	7 350	6 850	130	13 200	7 600	11 900	55.3	130	3.40	155.5	152.3	174.5	181.5	140	135.5	190	194.5	2	1
2LA-HSE028AD	140	210	33	2	1	74.5	73.0	7 600	7 400	141	14 300	7 100	11 200	57.6	129	3.68	165.5	162.4	184.5	191.5	150	145.5	200	204.5	2	1
2LA-HSE030AD	150	225	35	2.1	1.1	77.0	78.5	7 850	8 000	151	15 400	6 700	10 400	61.5	163	4.46	178.0	174.8	197.0	204.0	162	157	213	218	2	1
2LA-HSE032AD	160	240	38	2.1	1.1	90.0	91.5	9 150	9 350	177	18 000	6 200	9 800	66.0	206	5.46	189.5	186.0	210.5	218.2	172	167	228	233	2	1
2LA-HSE034AD	170	260	42	2.1	1.1	103	105	10 500	10 700	203	20 700	5 800	9 100	71.5	272	7.37	203.6	199.8	226.4	234.9	182	177	248	253	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads


Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

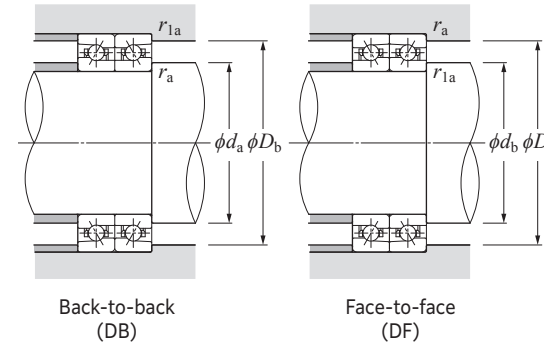


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSE9U type



Contact angle 15° d 50–170 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions								
	mm					dynamic	static	dynamic	static	kN	kgf		kN	kgf				min ⁻¹	min ⁻¹	mm	mm									
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{ls}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	<i>f₀</i>		grease lubrication	oil lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d_a</i> min	<i>d_b</i> min	<i>D_a</i> max	<i>D_b</i> max	<i>r_{as}</i> max	<i>r_{las}</i> max
5S-2LA-HSE910UC	50	72	12	0.6	0.3	12.1	5.65	1 240	575	7.45	760	7.6	25 600	42 400	14.2	6.0	0.12	57.6	56.6	64.4	66.8	54.5	52.5	67.5	69.5	0.6	0.3			
5S-2LA-HSE911UC	55	80	13	1	0.6	15.1	7.05	1 540	715	9.30	950	7.5	23 100	38 300	15.6	7.7	0.17	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6			
5S-2LA-HSE912UC	60	85	13	1	0.6	15.7	7.70	1 600	785	10.1	1 040	7.6	21 500	35 700	16.3	8.3	0.18	68.6	67.4	76.4	79.1	65.5	64.5	79.5	80.5	1	0.6			
5S-2LA-HSE913UC	65	90	13	1	0.6	15.8	8.05	1 620	820	10.6	1 090	7.6	20 100	33 400	17.0	8.9	0.19	73.6	72.4	81.4	84.1	70.5	69.5	84.5	85.5	1	0.6			
5S-2LA-HSE914UC	70	100	16	1	0.6	23.2	11.5	2 370	1 170	15.2	1 560	7.5	18 400	30 400	19.5	14	0.31	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6			
5S-2LA-HSE915UC	75	105	16	1	0.6	24.1	12.5	2 460	1 270	16.6	1 700	7.6	17 300	28 700	20.1	15	0.33	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6			
5S-2LA-HSE916UC	80	110	16	1	0.6	24.4	13.0	2 490	1 330	17.3	1 770	7.6	16 400	27 200	20.8	16	0.34	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6			
5S-2LA-HSE917UC	85	120	18	1.1	0.6	33.0	17.2	3 350	1 750	22.9	2 340	7.5	15 200	25 200	22.8	22	0.48	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6			
5S-2LA-HSE918UC	90	125	18	1.1	0.6	34.5	18.6	3 500	1 900	24.8	2 530	7.6	14 500	24 100	23.5	23	0.51	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6			
5S-2LA-HSE919UC	95	130	18	1.1	0.6	35.0	19.4	3 550	1 970	25.8	2 640	7.6	13 900	23 000	24.2	24	0.53	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6			
5S-2LA-HSE920UC	100	140	20	1.1	0.6	40.5	22.7	4 100	2 310	29.9	3 050	7.6	13 000	21 600	26.2	32	0.74	113.8	111.7	126.2	130.7	107	104.5	133	135.5	1	0.6			
5S-2LA-HSE921UC	105	145	20	1.1	0.6	41.0	23.6	4 150	2 400	31.0	3 200	7.6	12 500	20 700	26.9	33	0.77	118.8	116.7	131.2	135.7	112	109.5	138	140.5	1	0.6			
5S-2LA-HSE922UC	110	150	20	1.1	0.6	41.5	24.5	4 200	2 500	32.0	3 300	7.7	12 000	19 900	27.5	35	0.80	123.8	121.7	136.2	140.7	117	114.5	143	145.5	1	0.6			
5S-2LA-HSE924UC	120	165	22	1.1	0.6	53.0	31.5	5 400	3 200	41.5	4 250	7.6	10 900	18 200	30.2	47	1.08	135.4	133.0	149.6	154.8	127	124.5	158	160.5	1	0.6			
5S-2LA-HSE926UC	130	180	24	1.5	1	65.5	38.5	6 700	3 950	51.0	5 250	7.6	10 100	16 700	32.9	62	1.40	146.9	144.2	163.1	168.9	138.5	135.5	171.5	174.5	1.5	1			
5S-2LA-HSE928UC	140	190	24	1.5	1	66.0	40.5	6 750	4 100	53.5	5 500	7.6	9 500	15 700	34.3	66	1.48	156.9	154.2	173.1	178.9	148.5	145.5	181.5	184.5	1.5	1			
5S-2LA-HSE930UC	150	210	28	2	1	88.0	53.5	8 950	5 450	71.5	7 300	7.6	8 700	14 400	38.3	99	2.30	170.5	167.3	189.5	196.4	160	155.5	200	204.5	2	1			
5S-2LA-HSE932UC	160	220	28	2	1	89.0	55.5	9 050	5 700	74.5	7 600	7.6	8 200	13 600	39.6	105	2.42	180.5	177.3	199.5	206.3	170	165.5	210	214.5	2	1			
5S-2LA-HSE934UC	170	230	28	2	1	89.5	58.0	9 150	5 900	77.0	7 900	7.7	7 800	12 900	41.0	111	2.55	190.5	187.3	209.5	216.3	180	175.5	220	224.5	2	1			

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$

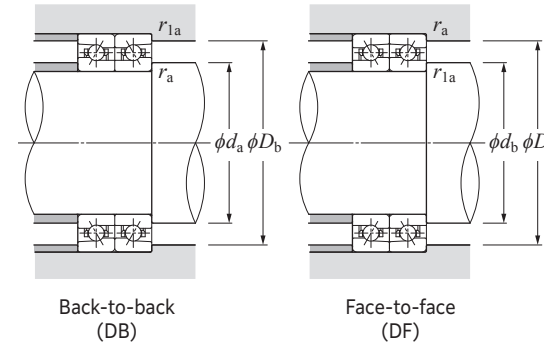

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57		1.76		2.56
0.357	0.36				1.53		1.71		2.48
0.714	0.38				1.46		1.64		2.38
1.07	0.4				1.42		1.59		2.31
1.43	0.41	1	0	0.44	1.38	1	1.55	0.72	2.25
2.14	0.43				1.33		1.49		2.16
3.57	0.44				1.25		1.4		2.03
5.35	0.47				1.18		1.32		1.92
7.14	0.49				1.13		1.26		1.83

Static equivalent radial load


$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSE9U type



Contact angle 20° d 50–170 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm						dynamic kN	static kgf	dynamic kgf	static kN	kN	kgf	grease min ⁻¹	oil min ⁻¹				mm				mm					
	d	D	B	$r_s \min^{-1}$	$r_{1s} \min^{-1}$		C_r	C_{0r}	C_r	C_{0r}	(static)							d_1	d_2	D_1	D_2	$d_a \min$	$d_b \min$	$D_a \max$	$D_b \max$	$r_{as} \max$	$r_{1as} \max$
5S-2LA-HSE910U	50	72	12	0.6	0.3		11.8	5.50	1 210	560	8.55	875	28 200	46 100	17.2	6.0	0.12	57.6	56.6	64.4	66.8	54.5	52.5	67.5	69.5	0.6	0.3
5S-2LA-HSE911U	55	80	13	1	0.6		14.7	6.85	1 500	700	10.7	1 090	25 500	41 700	18.9	7.7	0.17	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6
5S-2LA-HSE912U	60	85	13	1	0.6		15.3	7.50	1 560	765	11.6	1 190	23 700	38 800	19.8	8.3	0.18	68.6	67.4	76.4	79.1	65.5	64.5	79.5	80.5	1	0.6
5S-2LA-HSE913U	65	90	13	1	0.6		15.4	7.85	1 570	800	12.2	1 250	22 200	36 300	20.7	8.9	0.19	73.6	72.4	81.4	84.0	70.5	69.5	84.5	85.5	1	0.6
5S-2LA-HSE914U	70	100	16	1	0.6		22.6	11.2	2 310	1 140	17.4	1 780	20 200	33 100	23.6	14	0.31	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6
5S-2LA-HSE915U	75	105	16	1	0.6		23.5	12.2	2 390	1 240	19.0	1 940	19 100	31 300	24.5	15	0.33	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6
5S-2LA-HSE916U	80	110	16	1	0.6		23.7	12.7	2 420	1 290	19.8	2 020	18 100	29 600	25.4	16	0.34	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6
5S-2LA-HSE917U	85	120	18	1.1	0.6		32.0	16.8	3 300	1 710	26.1	2 670	16 800	27 400	27.8	22	0.48	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6
5S-2LA-HSE918U	90	125	18	1.1	0.6		33.5	18.1	3 400	1 850	28.3	2 890	16 000	26 200	28.7	23	0.51	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6
5S-2LA-HSE919U	95	130	18	1.1	0.6		34.0	18.9	3 450	1 930	29.4	3 000	15 300	25 000	29.6	24	0.53	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6
5S-2LA-HSE920U	100	140	20	1.1	0.6		39.5	22.1	4 000	2 260	34.0	3 500	14 300	23 400	32.0	32	0.74	113.8	111.7	126.2	130.6	107	104.5	133	135.5	1	0.6
5S-2LA-HSE921U	105	145	20	1.1	0.6		40.0	23.0	4 050	2 350	35.5	3 650	13 800	22 500	32.9	33	0.77	118.8	116.7	131.2	135.6	112	109.5	138	140.5	1	0.6
5S-2LA-HSE922U	110	150	20	1.1	0.6		40.0	23.9	4 100	2 430	37.0	3 800	13 200	21 600	33.8	35	0.80	123.8	121.7	136.2	140.6	117	114.5	143	145.5	1	0.6
5S-2LA-HSE924U	120	165	22	1.1	0.6		51.5	30.5	5 250	3 100	47.5	4 850	12 100	19 700	37.1	47	1.08	135.4	133.0	149.6	154.7	127	124.5	158	160.5	1	0.6
5S-2LA-HSE926U	130	180	24	1.5	1		64.0	38.0	6 500	3 850	58.5	6 000	11 100	18 100	40.4	62	1.40	146.9	144.2	163.1	168.9	138.5	135.5	171.5	174.5	1.5	1
5S-2LA-HSE928U	140	190	24	1.5	1		64.5	39.5	6 550	4 000	61.0	6 250	10 400	17 000	42.2	66	1.48	156.9	154.2	173.1	178.8	148.5	145.5	181.5	184.5	1.5	1
5S-2LA-HSE930U	150	210	28	2	1		86.0	52.0	8 750	5 350	81.0	8 300	9 600	15 600	47.0	99	2.30	170.5	167.3	189.5	196.3	160	155.5	200	204.5	2	1
5S-2LA-HSE932U	160	220	28	2	1		86.5	54.5	8 850	5 550	84.5	8 650	9 100	14 800	48.8	105	2.42	180.5	177.3	199.5	206.3	170	165.5	210	214.5	2	1
5S-2LA-HSE934U	170	230	28	2	1		87.5	56.5	8 900	5 750	88.0	9 000	8 600	14 100	50.6	111	2.55	190.5	187.3	209.5	216.3	180	175.5	220	224.5	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads


Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

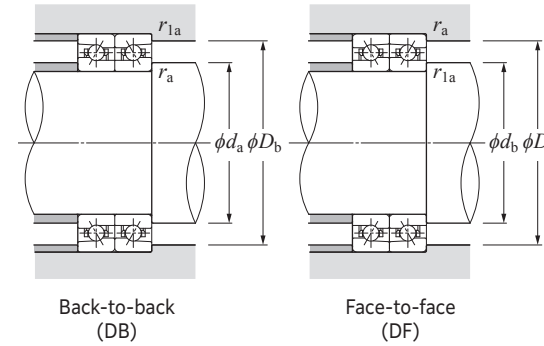

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSE9U type



Contact angle 25° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm					dynamic kN	static kgf	dynamic kgf	static kgf	kN	kgf	min ⁻¹	min ⁻¹				mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{l min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	grease lubrication	oil lubrication	<i>a</i>				Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>d</i> _{b min}	<i>D</i> _{a max}	<i>D</i> _{b max}
5S-2LA-HSE910UAD	50	72	12	0.6	0.3	11.4	5.30	1 170	545	9.75	995	24 300	41 000	20.3	6.0	0.12	57.6	56.6	64.4	66.7	54.5	52.5	67.5	69.5	0.6	0.3
5S-2LA-HSE911UAD	55	80	13	1	0.6	14.3	6.65	1 450	680	12.1	1 240	22 000	37 000	22.4	7.7	0.17	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6
5S-2LA-HSE912UAD	60	85	13	1	0.6	14.8	7.25	1 510	740	13.3	1 360	20 500	34 500	23.5	8.3	0.18	68.6	67.4	76.4	79.0	65.5	64.5	79.5	80.5	1	0.6
5S-2LA-HSE913UAD	65	90	13	1	0.6	14.9	7.60	1 520	775	13.9	1 420	19 200	32 300	24.7	8.9	0.19	73.6	72.4	81.4	84.0	70.5	69.5	84.5	85.5	1	0.6
5S-2LA-HSE914UAD	70	100	16	1	0.6	21.9	10.8	2 230	1 100	19.9	2 030	17 500	29 400	28.0	14	0.31	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6
5S-2LA-HSE915UAD	75	105	16	1	0.6	22.7	11.8	2 310	1 200	21.5	2 200	16 500	27 800	29.1	15	0.33	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6
5S-2LA-HSE916UAD	80	110	16	1	0.6	23.0	12.3	2 340	1 250	22.5	2 300	15 600	26 300	30.3	16	0.34	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6
5S-2LA-HSE917UAD	85	120	18	1.1	0.6	31.0	16.2	3 150	1 660	29.4	3 000	14 500	24 400	33.1	22	0.48	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6
5S-2LA-HSE918UAD	90	125	18	1.1	0.6	32.5	17.6	3 300	1 790	31.5	3 250	13 800	23 300	34.2	23	0.51	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6
5S-2LA-HSE919UAD	95	130	18	1.1	0.6	32.5	18.3	3 350	1 870	33.0	3 400	13 200	22 200	35.4	24	0.53	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6
5S-2LA-HSE920UAD	100	140	20	1.1	0.6	38.0	21.4	3 850	2 190	39.0	4 000	12 400	20 800	38.2	32	0.74	113.8	111.7	126.2	130.6	107	104.5	133	135.5	1	0.6
5S-2LA-HSE921UAD	105	145	20	1.1	0.6	38.5	22.3	3 900	2 270	40.5	4 150	11 900	20 000	39.3	33	0.77	118.8	116.7	131.2	135.6	112	109.5	138	140.5	1	0.6
5S-2LA-HSE922UAD	110	150	20	1.1	0.6	39.0	23.1	3 950	2 360	42.0	4 300	11 400	19 200	40.5	35	0.80	123.8	121.7	136.2	140.6	117	114.5	143	145.5	1	0.6
5S-2LA-HSE924UAD	120	165	22	1.1	0.6	50.0	29.6	5 100	3 000	54.0	5 550	10 400	17 500	44.4	47	1.08	135.4	133.0	149.6	154.7	127	124.5	158	160.5	1	0.6
5S-2LA-HSE926UAD	130	180	24	1.5	1	61.5	36.5	6 300	3 750	67.0	6 850	9 600	16 100	48.4	62	1.40	146.9	144.2	163.1	168.8	138.5	135.5	171.5	174.5	1.5	1
5S-2LA-HSE928UAD	140	190	24	1.5	1	62.0	38.0	6 350	3 900	70.0	7 150	9 000	15 200	50.7	66	1.48	156.9	154.2	173.1	178.8	148.5	145.5	181.5	184.5	1.5	1
5S-2LA-HSE930UAD	150	210	28	2	1	83.0	50.5	8 450	5 150	92.5	9 450	8 200	13 900	56.3	99	2.30	170.5	167.3	189.5	196.3	160	155.5	200	204.5	2	1
5S-2LA-HSE932UAD	160	220	28	2	1	83.5	52.5	8 550	5 350	96.5	9 850	7 800	13 200	58.6	105	2.42	180.5	177.3	199.5	206.3	170	165.5	210	214.5	2	1
5S-2LA-HSE934UAD	170	230	28	2	1	84.5	54.5	8 600	5 600	100	10 200	7 400	12 500	60.9	111	2.55	190.5	187.3	209.5	216.3	180	175.5	220	224.5	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

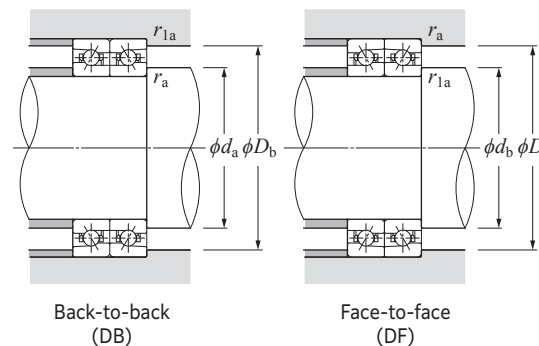


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSE0 type



Contact angle 15° d 50–170 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
	mm						dynamic		static										mm	cm ³	kg	mm				mm																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{1s min} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	kN	kgf	kN	kgf	<i>f</i> ₀	grease lubrication	oil lubrication	<i>a</i>	Single-row (approx.)				Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57		1.76		2.56
0.357	0.36				1.53		1.71		2.48
0.714	0.38				1.46		1.64		2.38
1.07	0.4				1.42		1.59		2.31
1.43	0.41	1	0	0.44	1.38	1	1.55	0.72	2.25
2.14	0.43				1.33		1.49		2.16
3.57	0.44				1.25		1.4		2.03
5.35	0.47				1.18		1.32		1.92
7.14	0.49				1.13		1.26		1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

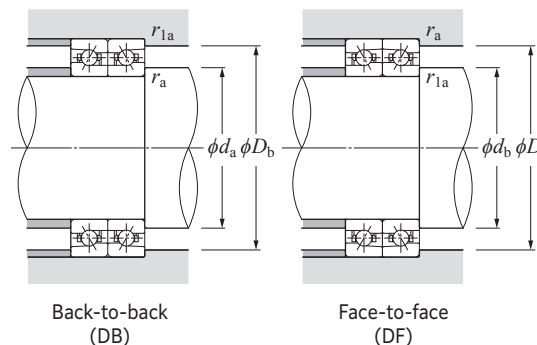

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSE0 type



Contact angle 20° d 50–170 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions						
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf	min ⁻¹	grease				oil	mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁽¹⁾}	<i>r</i> _{is min⁽¹⁾}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)									<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _{a min}	<i>d</i> _{b min}	<i>D</i> _{a max}	<i>D</i> _{b max}	<i>r</i> _{as max}
5S-2LA-HSE010	50	80	16	1	0.6	17.2	7.75	1 750	790	12.1	1 230	26 500	43 300	19.9	12	0.23	60.1	58.6	69.9	73.2	55.5	54.5	74.5	75.5	1	0.6	
5S-2LA-HSE011	55	90	18	1.1	0.6	18.7	9.20	1 900	935	14.4	1 460	23 700	38 800	22.3	16	0.37	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6	
5S-2LA-HSE012	60	95	18	1.1	0.6	19.5	10.2	1 990	1 040	15.9	1 620	22 200	36 300	23.2	17	0.40	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6	
5S-2LA-HSE013	65	100	18	1.1	0.6	19.8	10.7	2 020	1 090	16.7	1 710	20 800	34 100	24.1	18	0.42	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6	
5S-2LA-HSE014	70	110	20	1.1	0.6	24.2	13.5	2 470	1 370	21.1	2 150	19 100	31 200	26.5	24	0.60	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6	
5S-2LA-HSE015	75	115	20	1.1	0.6	25.8	15.2	2 630	1 550	23.8	2 420	18 100	29 600	27.4	25	0.64	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6	
5S-2LA-HSE016	80	125	22	1.1	0.6	29.6	17.4	3 000	1 770	27.2	2 780	16 800	27 400	29.8	34	0.86	96.8	94.9	108.2	112.5	87	84.5	118	120.5	1	0.6	
5S-2LA-HSE017	85	130	22	1.1	0.6	30.0	18.1	3 050	1 850	28.4	2 900	16 000	26 200	30.7	35	0.90	101.8	99.9	113.2	117.4	92	89.5	123	125.5	1	0.6	
5S-2LA-HSE018	90	140	24	1.5	1	34.5	21.3	3 550	2 170	33.5	3 400	15 000	24 500	33.1	45	1.18	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1	
5S-2LA-HSE019	95	145	24	1.5	1	35.0	22.1	3 600	2 260	34.5	3 550	14 300	23 400	34.0	47	1.23	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1	
5S-2LA-HSE020	100	150	24	1.5	1	36.5	23.8	3 700	2 420	37.5	3 800	13 800	22 500	34.9	49	1.28	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1	
5S-2LA-HSE021	105	160	26	2	1	42.0	27.5	4 250	2 810	43.0	4 400	13 000	21 200	37.3	61	1.63	125.8	123.6	139.2	144.1	115	110.5	150	154.5	2	1	
5S-2LA-HSE022	110	170	28	2	1	51.5	33.5	5 300	3 400	52.0	5 300	12 300	20 100	39.7	77	1.99	132.4	129.8	147.6	153.2	120	115.5	160	164.5	2	1	
5S-2LA-HSE024	120	180	28	2	1	52.0	35.0	5 300	3 550	54.5	5 550	11 500	18 700	41.5	82	2.14	142.4	139.8	157.6	163.2	130	125.5	170	174.5	2	1	
5S-2LA-HSE026	130	200	33	2	1	74.5	48.0	7 600	4 900	75.5	7 700	10 400	17 000	46.8	130	3.18	155.5	152.3	174.5	181.5	140	135.5	190	194.5	2	1	
5S-2LA-HSE028	140	210	33	2	1	77.5	52.0	7 900	5 300	81.5	8 300	9 800	16 100	48.6	129	3.41	165.5	162.4	184.5	191.5	150	145.5	200	204.5	2	1	
5S-2LA-HSE030	150	225	35	2.1	1.1	79.5	56.0	8 100	5 700	88.0	8 950	9 200	15 000	51.9	163	4.17	178.0	174.8	197.0	204.0	162	157	213	218	2	1	
5S-2LA-HSE032	160	240	38	2.1	1.1	93.0	65.5	9 500	6 700	103	10 500	8 600	14 100	55.7	206	5.09	189.5	186.0	210.5	218.2	172	167	228	233	2	1	
5S-2LA-HSE034	170	260	42	2.1	1.1	107	75.0	10 900	7 650	118	12 000	8 000	13 100	60.4	272	6.90	203.6	199.8	226.4	234.9	182	177	248	253	2	1	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

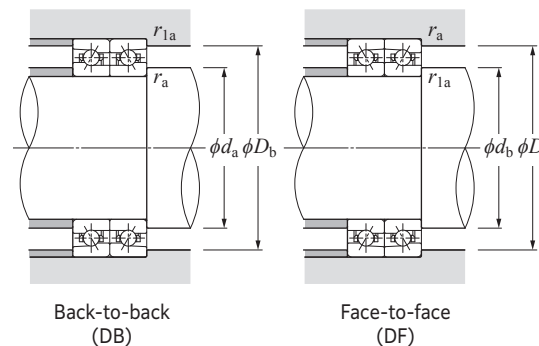


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE High speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSE0 type



Contact angle 25° d 50–170 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm						dynamic kN	static kgf	dynamic kgf	static kN	kN	kgf	min ⁻¹	min ⁻¹				mm				mm					
	d	D	B	r _s min ¹⁾	r _{1s} min ¹⁾		C _r	C _{0r}	C _r	C _{0r}	(static)		grease lubrication	oil lubrication				d ₁	d ₂	D ₁	D ₂	d _a min	d _b min	D _a max	D _b max	r _{as} max	r _{1as} max
5S-2LA-HSE010AD	50	80	16	1	0.6		16.6	7.50	1 700	765	13.8	1 400	22 800	38 500	23.3	12	0.23	60.1	58.6	69.9	73.2	55.5	54.5	74.5	75.5	1	0.6
5S-2LA-HSE011AD	55	90	18	1.1	0.6		18.1	8.90	1 840	910	16.4	1 670	20 500	34 500	26.1	16	0.37	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6
5S-2LA-HSE012AD	60	95	18	1.1	0.6		18.9	9.85	1 930	1 000	18.1	1 850	19 200	32 300	27.2	17	0.40	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6
5S-2LA-HSE013AD	65	100	18	1.1	0.6		19.2	10.4	1 960	1 060	19.0	1 940	18 000	30 300	28.4	18	0.42	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6
5S-2LA-HSE014AD	70	110	20	1.1	0.6		23.4	13.0	2 390	1 330	24.0	2 440	16 500	27 800	31.1	24	0.60	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6
5S-2LA-HSE015AD	75	115	20	1.1	0.6		25.0	14.7	2 550	1 500	27.0	2 760	15 600	26 300	32.3	25	0.64	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6
5S-2LA-HSE016AD	80	125	22	1.1	0.6		28.6	16.9	2 910	1 720	31.0	3 150	14 500	24 400	35.1	34	0.86	96.8	94.9	108.2	112.4	87	84.5	118	120.5	1	0.6
5S-2LA-HSE017AD	85	130	22	1.1	0.6		28.9	17.6	2 950	1 790	32.5	3 300	13 800	23 300	36.2	35	0.90	101.8	99.9	113.2	117.4	92	89.5	123	125.5	1	0.6
5S-2LA-HSE018AD	90	140	24	1.5	1		33.5	20.6	3 400	2 100	38.0	3 850	12 900	21 700	39.0	45	1.18	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1
5S-2LA-HSE019AD	95	145	24	1.5	1		34.0	21.4	3 450	2 190	39.5	4 000	12 400	20 800	40.2	47	1.23	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1
5S-2LA-HSE020AD	100	150	24	1.5	1		35.0	23.0	3 600	2 350	42.5	4 300	11 900	20 000	41.3	49	1.28	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1
5S-2LA-HSE021AD	105	160	26	2	1		40.5	26.7	4 100	2 720	49.0	5 000	11 200	18 900	44.1	61	1.63	125.8	123.6	139.2	144.1	115	110.5	150	154.5	2	1
5S-2LA-HSE022AD	110	170	28	2	1		50.0	32.5	5 100	3 300	59.5	6 050	10 600	17 900	46.9	77	1.99	132.4	129.8	147.6	153.2	120	115.5	160	164.5	2	1
5S-2LA-HSE024AD	120	180	28	2	1		50.5	33.5	5 150	3 450	62.0	6 300	9 900	16 700	49.2	82	2.14	142.4	139.8	157.6	163.2	130	125.5	170	174.5	2	1
5S-2LA-HSE026AD	130	200	33	2	1		72.5	46.5	7 350	4 750	85.5	8 750	9 000	15 200	55.3	130	3.18	155.5	152.3	174.5	181.5	140	135.5	190	194.5	2	1
5S-2LA-HSE028AD	140	210	33	2	1		74.5	50.5	7 600	5 150	92.5	9 450	8 500	14 300	57.6	129	3.41	165.5	162.4	184.5	191.5	150	145.5	200	204.5	2	1
5S-2LA-HSE030AD	150	225	35	2.1	1.1		77.0	54.5	7 850	5 550	100	10 200	7 900	13 300	61.5	163	4.17	178.0	174.8	197.0	204.0	162	157	213	218	2	1
5S-2LA-HSE032AD	160	240	38	2.1	1.1		90.0	63.5	9 150	6 450	117	11 900	7 400	12 500	66.0	206	5.09	189.5	186.0	210.5	218.2	172	167	228	233	2	1
5S-2LA-HSE034AD	170	260	42	2.1	1.1		103	73.0	10 500	7 450	134	13 700	6 900	11 600	71.5	272	6.90	203.6	199.8	226.4	234.9	182	177	248	253	2	1

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

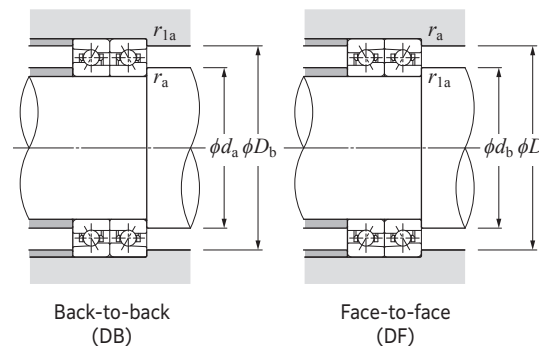

Angular Contact Ball Bearings for Radial Loads

ULTAGE Ultra high speed angular contact ball bearings (ceramic ball spec.)
5S-2LA-HSF0 type



Contact angle 25° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable ²⁾ speed	Load center	Internal free space	Mass	Reference dimensions				Abutment and fillet dimensions								
	mm					dynamic	static	dynamic	static	kN	kgf	min ⁻¹				mm	cm ³	kg	mm				mm					
						kN		kgf		kN	kgf	oil							mm	Single-row (approx.)	Single-row (approx.)	mm	mm	mm	mm	mm	mm	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹⁾	<i>r_{ls}</i> min ⁻¹⁾	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)																		
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹⁾	<i>r_{ls}</i> min ⁻¹⁾	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)			<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{las} max			
5S-2LA-HSF010AD	50	80	16	1	0.6	11.1	6.20	1 140	635	11.4	1 170	50 000	23.3	10	0.29	61.6	60.6	68.4	70.9	55.5	54.5	74.5	75.5	1	0.6			
5S-2LA-HSF011AD	55	90	18	1.1	0.6	13.9	7.80	1 420	800	14.4	1 470	44 800	26.0	14	0.42	68.6	67.4	76.4	79.2	62	59.5	83	85.5	1	0.6			
5S-2LA-HSF012AD	60	95	18	1.1	0.6	14.3	8.45	1 460	860	15.5	1 580	41 900	27.2	15	0.45	73.6	72.4	81.4	84.2	67	64.5	88	90.5	1	0.6			
5S-2LA-HSF013AD	65	100	18	1.1	0.6	14.7	9.05	1 500	925	16.7	1 700	39 400	28.3	16	0.48	78.6	77.4	86.4	89.2	72	69.5	93	95.5	1	0.6			
5S-2LA-HSF014AD	70	110	20	1.1	0.6	18.0	11.1	1 830	1 130	20.4	2 080	36 100	31.1	22	0.67	85.6	84.3	94.4	97.5	77	74.5	103	105.5	1	0.6			
5S-2LA-HSF015AD	75	115	20	1.1	0.6	18.5	11.9	1 880	1 210	21.8	2 220	34 200	32.3	24	0.71	90.6	89.3	99.4	102.5	82	79.5	108	110.5	1	0.6			
5S-2LA-HSF016AD	80	125	22	1.1	0.6	22.0	14.2	2 250	1 440	26.0	2 660	31 700	35.0	31	0.95	97.6	96.2	107.4	110.8	87	84.5	118	120.5	1	0.6			
5S-2LA-HSF017AD	85	130	22	1.1	0.6	22.2	14.7	2 270	1 500	27.0	2 750	30 200	36.2	33	1.00	102.6	101.2	112.4	115.8	92	89.5	123	125.5	1	0.6			
5S-2LA-HSF018AD	90	140	24	1.5	1	27.1	18.2	2 760	1 860	33.5	3 400	28 300	39.0	41	1.31	109.8	108.0	120.2	124.2	98.5	95.5	131.5	134.5	1.5	1			
5S-2LA-HSF019AD	95	145	24	1.5	1	27.3	18.8	2 790	1 920	34.5	3 550	27 100	40.1	43	1.36	114.8	113.0	125.2	129.2	103.5	100.5	136.5	139.5	1.5	1			
5S-2LA-HSF020AD	100	150	24	1.5	1	28.1	20.0	2 860	2 040	37.0	3 750	26 000	41.3	45	1.42	119.8	118.0	130.2	134.2	108.5	105.5	141.5	144.5	1.5	1			

1) Minimum allowable value for corner radius dimension r or r_1 .

2) If the bearing operating speed exceeds 70 % of the rated allowable speed, please contact **NTN** Engineering.

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

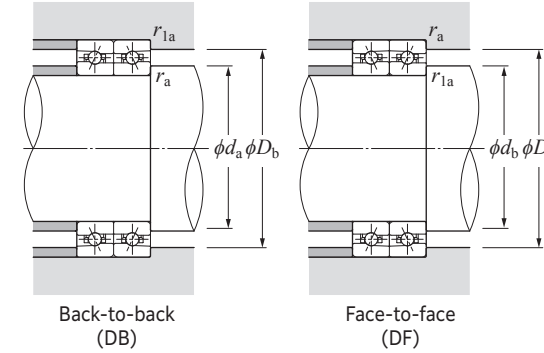


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Eco-friendly high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-HSL9U type



Contact angle 20° d 50–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ oil lubrication	Load center mm a	Mass kg Single-row (approx.)	Reference dimensions		Abutment and fillet dimensions					Part number
	d	D	B	r_s min ¹⁾	r_{1s} min ¹⁾	C_r	C_{0r}	C_r	C_{0r}	(static)	kgf				d_1	D_2	d_a min	D_b max	r_{as} max	r_{1as} max	$l^{2)}$ min	
5S-2LA-HSL910U	50	72	12	0.6	0.3	11.8	5.50	1 210	560	8.55	875	46 100	17.2	0.11	57.6	66.8	54.5	69.5	0.6	0.3	8.5	5S-2LA-HSL910U
5S-2LA-HSL911U	55	80	13	1	0.6	14.7	6.85	1 500	700	10.6	1 090	41 700	18.9	0.16	63.6	74.1	60.5	75.5	1	0.6	8.5	5S-2LA-HSL911U
5S-2LA-HSL912U	60	85	13	1	0.6	15.3	7.50	1 560	765	11.6	1 190	38 800	19.8	0.17	68.6	79.1	65.5	80.5	1	0.6	8.5	5S-2LA-HSL912U
5S-2LA-HSL913U	65	90	13	1	0.6	15.4	7.85	1 570	800	12.2	1 250	36 300	20.7	0.17	73.6	84.0	70.5	85.5	1	0.6	8.5	5S-2LA-HSL913U
5S-2LA-HSL914U	70	100	16	1	0.6	22.6	11.2	2 310	1 140	17.4	1 780	33 100	23.6	0.29	80.1	93.2	75.5	95.5	1	0.6	8.5	5S-2LA-HSL914U
5S-2LA-HSL915U	75	105	16	1	0.6	23.5	12.2	2 390	1 240	19.0	1 940	31 300	24.5	0.31	85.1	98.2	80.5	100.5	1	0.6	9	5S-2LA-HSL915U
5S-2LA-HSL916U	80	110	16	1	0.6	23.7	12.7	2 420	1 290	19.8	2 020	29 600	25.4	0.32	90.1	103.2	85.5	105.5	1	0.6	9	5S-2LA-HSL916U
5S-2LA-HSL917U	85	120	18	1.1	0.6	32.0	16.8	3 300	1 710	26.1	2 670	27 400	27.8	0.45	96.8	112.3	92	115.5	1	0.6	9	5S-2LA-HSL917U
5S-2LA-HSL918U	90	125	18	1.1	0.6	33.5	18.1	3 400	1 850	28.3	2 890	26 200	28.7	0.48	101.8	117.3	97	120.5	1	0.6	9	5S-2LA-HSL918U
5S-2LA-HSL919U	95	130	18	1.1	0.6	34.0	18.9	3 450	1 930	29.4	3 000	25 000	29.6	0.50	106.8	122.3	102	125.5	1	0.6	9	5S-2LA-HSL919U
5S-2LA-HSL920U	100	140	20	1.1	0.6	39.5	22.1	4 000	2 260	34.0	3 500	23 400	32.0	0.69	113.8	130.6	107	135.5	1	0.6	9	5S-2LA-HSL920U
5S-2LA-HSL921U	105	145	20	1.1	0.6	40.0	23.0	4 050	2 350	35.5	3 650	22 500	32.9	0.72	118.8	135.6	112	140.5	1	0.6	9	5S-2LA-HSL921U
5S-2LA-HSL922U	110	150	20	1.1	0.6	40.0	23.9	4 100	2 430	37.0	3 800	21 600	33.8	0.75	123.8	140.6	117	145.5	1	0.6	9	5S-2LA-HSL922U
5S-2LA-HSL924U	120	165	22	1.1	0.6	51.5	30.5	5 250	3 100	47.5	4 850	19 700	37.1	1.01	135.4	154.7	127	160.5	1	0.6	9	5S-2LA-HSL924U
5S-2LA-HSL926U	130	180	24	1.5	1	64.0	38.0	6 500	3 850	58.5	6 000	18 100	40.4	1.32	146.9	168.9	138.5	174.5	1.5	1	9	5S-2LA-HSL926U

1) Minimum allowable value for corner radius dimension r or r_1 .
2) For the details of spacer dimensions, please contact **NTN** Engineering.

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.



Angular Contact Ball Bearings for Radial Loads

ULTAGE Eco-friendly high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-HSL9U type



Contact angle 25° d 50–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ oil lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions		Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf				mm		mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{ls min} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>d</i> ₁				<i>D</i> ₂	<i>d</i> _a min	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{las} max	<i>l</i> ²⁾ min		
5S-2LA-HSL910UAD	50	72	12	0.6	0.3	11.4	5.30	1 170	545	9.75	995	41 000	20.3	0.11	57.6	66.7	54.5	69.5	0.6	0.3	8.5	5S-2LA-HSL910UAD
5S-2LA-HSL911UAD	55	80	13	1	0.6	14.3	6.65	1 450	680	12.1	1 240	37 000	22.4	0.16	63.6	74.1	60.5	75.5	1	0.6	8.5	5S-2LA-HSL911UAD
5S-2LA-HSL912UAD	60	85	13	1	0.6	14.8	7.25	1 510	740	13.3	1 360	34 500	23.5	0.17	68.6	79.0	65.5	80.5	1	0.6	8.5	5S-2LA-HSL912UAD
5S-2LA-HSL913UAD	65	90	13	1	0.6	14.9	7.60	1 520	775	13.9	1 420	32 300	24.7	0.17	73.6	84.0	70.5	85.5	1	0.6	8.5	5S-2LA-HSL913UAD
5S-2LA-HSL914UAD	70	100	16	1	0.6	21.9	10.8	2 230	1 100	19.9	2 030	29 400	28.0	0.29	80.1	93.2	75.5	95.5	1	0.6	8.5	5S-2LA-HSL914UAD
5S-2LA-HSL915UAD	75	105	16	1	0.6	22.7	11.8	2 310	1 200	21.5	2 200	27 800	29.1	0.31	85.1	98.2	80.5	100.5	1	0.6	9	5S-2LA-HSL915UAD
5S-2LA-HSL916UAD	80	110	16	1	0.6	23.0	12.3	2 340	1 250	22.5	2 300	26 300	30.3	0.32	90.1	103.2	85.5	105.5	1	0.6	9	5S-2LA-HSL916UAD
5S-2LA-HSL917UAD	85	120	18	1.1	0.6	31.0	16.2	3 150	1 660	29.4	3 000	24 400	33.1	0.45	96.8	112.3	92	115.5	1	0.6	9	5S-2LA-HSL917UAD
5S-2LA-HSL918UAD	90	125	18	1.1	0.6	32.5	17.6	3 300	1 790	31.5	3 250	23 300	34.2	0.48	101.8	117.3	97	120.5	1	0.6	9	5S-2LA-HSL918UAD
5S-2LA-HSL919UAD	95	130	18	1.1	0.6	32.5	18.3	3 350	1 870	33.0	3 400	22 200	35.4	0.50	106.8	122.3	102	125.5	1	0.6	9	5S-2LA-HSL919UAD
5S-2LA-HSL920UAD	100	140	20	1.1	0.6	38.0	21.4	3 850	2 190	39.0	4 000	20 800	38.2	0.69	113.8	130.6	107	135.5	1	0.6	9	5S-2LA-HSL920UAD
5S-2LA-HSL921UAD	105	145	20	1.1	0.6	38.5	22.3	3 900	2 270	40.5	4 150	20 000	39.3	0.72	118.8	135.6	112	140.5	1	0.6	9	5S-2LA-HSL921UAD
5S-2LA-HSL922UAD	110	150	20	1.1	0.6	39.0	23.1	3 950	2 360	42.0	4 300	19 200	40.5	0.75	123.8	140.6	117	145.5	1	0.6	9	5S-2LA-HSL922UAD
5S-2LA-HSL924UAD	120	165	22	1.1	0.6	50.0	29.6	5 100	3 000	54.0	5 550	17 500	44.4	1.01	135.4	154.7	127	160.5	1	0.6	9	5S-2LA-HSL924UAD
5S-2LA-HSL926UAD	130	180	24	1.5	1	61.5	36.5	6 300	3 750	67.0	6 850	16 100	48.4	1.32	146.9	168.8	138.5	174.5	1.5	1	9	5S-2LA-HSL926UAD

1) Minimum allowable value for corner radius dimension r or r_1 .
2) For the details of spacer dimensions, please contact **NTN** Engineering.

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.



Angular Contact Ball Bearings for Radial Loads

ULTAGE Eco-friendly high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-HSL0 type



Contact angle 20° d 50–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ oil lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions		Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf				<i>d</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max	<i>l</i> ⁽²⁾ min	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _s min ⁽¹⁾	<i>r</i> _{1s} min ⁽¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)												
5S-2LA-HSL010	50	80	16	1	0.6	17.2	7.8	1 750	790	12.1	1 230	43 300	19.9	0.22	60.1	73.2	55.5	75.5	1	0.6	8.5	5S-2LA-HSL010
5S-2LA-HSL011	55	90	18	1.1	0.6	18.7	9.2	1 900	935	14.4	1 460	38 800	22.3	0.35	67.6	80.8	62	85.5	1	0.6	8.5	5S-2LA-HSL011
5S-2LA-HSL012	60	95	18	1.1	0.6	19.5	10.2	1 990	1 040	15.9	1 620	36 300	23.2	0.38	72.6	85.8	67	90.5	1	0.6	8.5	5S-2LA-HSL012
5S-2LA-HSL013	65	100	18	1.1	0.6	19.8	10.7	2 020	1 090	16.7	1 710	34 100	24.1	0.40	77.6	90.8	72	95.5	1	0.6	9	5S-2LA-HSL013
5S-2LA-HSL014	70	110	20	1.1	0.6	24.2	13.5	2 470	1 370	21.1	2 150	31 200	26.5	0.57	84.8	99.1	77	105.5	1	0.6	9	5S-2LA-HSL014
5S-2LA-HSL015	75	115	20	1.1	0.6	25.8	15.2	2 630	1 550	23.8	2 420	29 600	27.4	0.60	89.8	104.1	82	110.5	1	0.6	9	5S-2LA-HSL015
5S-2LA-HSL016	80	125	22	1.1	0.6	29.6	17.4	3 000	1 770	27.2	2 780	27 400	29.8	0.82	96.8	112.5	87	120.5	1	0.6	9	5S-2LA-HSL016
5S-2LA-HSL017	85	130	22	1.1	0.6	30.0	18.1	3 050	1 850	28.4	2 900	26 200	30.7	0.85	101.8	117.4	92	125.5	1	0.6	9	5S-2LA-HSL017
5S-2LA-HSL018	90	140	24	1.5	1	34.5	21.3	3 550	2 170	33.5	3 400	24 500	33.1	1.12	108.8	125.8	98.5	134.5	1.5	1	9	5S-2LA-HSL018
5S-2LA-HSL019	95	145	24	1.5	1	35.0	22.1	3 600	2 260	34.5	3 550	23 400	34.0	1.17	113.8	130.8	103.5	139.5	1.5	1	9	5S-2LA-HSL019
5S-2LA-HSL020	100	150	24	1.5	1	36.5	23.8	3 700	2 420	37.5	3 800	22 500	34.9	1.22	118.8	135.8	108.5	144.5	1.5	1	9	5S-2LA-HSL020
5S-2LA-HSL021	105	160	26	2	1	42.0	27.5	4 250	2 810	43.0	4 400	21 200	37.3	1.55	125.8	144.1	115	154.5	2	1	9	5S-2LA-HSL021
5S-2LA-HSL022	110	170	28	2	1	51.5	33.5	5 300	3 400	52.0	5 300	20 100	39.7	1.89	132.4	153.2	120	164.5	2	1	9	5S-2LA-HSL022
5S-2LA-HSL024	120	180	28	2	1	52.0	35.0	5 300	3 550	54.5	5 550	18 700	41.5	2.03	142.4	163.2	130	174.5	2	1	9	5S-2LA-HSL024
5S-2LA-HSL026	130	200	33	2	1	74.5	48.0	7 600	4 900	75.5	7 700	17 000	46.8	2.98	155.5	181.5	140	194.5	2	1	9	5S-2LA-HSL026

1) Minimum allowable value for corner radius dimension r or r_1 .
2) For the details of spacer dimensions, please contact **NTN** Engineering.

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.



ϕd_a ϕD_b

Angular Contact Ball Bearings for Radial Loads

ULTAGE Eco-friendly high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-HSL0 type



Contact angle 25° d 50–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed	Load center mm	Mass	Reference dimensions		Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kgf	dynamic kgf	static kgf	kN	kgf	min ⁻¹ oil lubrication		kg	mm		mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁽¹⁾	<i>r_{1s}</i> min ⁽¹⁾	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)				<i>a</i>	Single-row (approx.)	<i>d</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>D</i> _b max	<i>r_{as}</i> max	<i>r</i> _{1as} max	
5S-2LA-HSL010AD	50	80	16	1	0.6	16.6	7.50	1 700	765	13.8	1 400	38 500	23.3	0.22	60.1	73.2	55.5	75.5	1	0.6	8.5	5S-2LA-HSL010AD
5S-2LA-HSL011AD	55	90	18	1.1	0.6	18.1	8.90	1 840	910	16.4	1 670	34 500	26.1	0.35	67.6	80.8	62	85.5	1	0.6	8.5	5S-2LA-HSL011AD
5S-2LA-HSL012AD	60	95	18	1.1	0.6	18.9	9.85	1 930	1 000	18.1	1 850	32 300	27.2	0.38	72.6	85.8	67	90.5	1	0.6	8.5	5S-2LA-HSL012AD
5S-2LA-HSL013AD	65	100	18	1.1	0.6	19.2	10.4	1 960	1 060	19.0	1 940	30 300	28.4	0.40	77.6	90.8	72	95.5	1	0.6	9	5S-2LA-HSL013AD
5S-2LA-HSL014AD	70	110	20	1.1	0.6	23.4	13.0	2 390	1 330	24.0	2 440	27 800	31.1	0.57	84.8	99.1	77	105.5	1	0.6	9	5S-2LA-HSL014AD
5S-2LA-HSL015AD	75	115	20	1.1	0.6	25.0	14.7	2 550	1 500	27.0	2 760	26 300	32.3	0.60	89.8	104.1	82	110.5	1	0.6	9	5S-2LA-HSL015AD
5S-2LA-HSL016AD	80	125	22	1.1	0.6	28.6	16.9	2 910	1 720	31.0	3 150	24 400	35.1	0.82	96.8	112.4	87	120.5	1	0.6	9	5S-2LA-HSL016AD
5S-2LA-HSL017AD	85	130	22	1.1	0.6	28.9	17.6	2 950	1 790	32.5	3 300	23 300	36.2	0.85	101.8	117.4	92	125.5	1	0.6	9	5S-2LA-HSL017AD
5S-2LA-HSL018AD	90	140	24	1.5	1	33.5	20.6	3 400	2 100	38.0	3 850	21 700	39.0	1.12	108.8	125.8	98.5	134.5	1.5	1	9	5S-2LA-HSL018AD
5S-2LA-HSL019AD	95	145	24	1.5	1	34.0	21.4	3 450	2 190	39.5	4 000	20 800	40.2	1.17	113.8	130.8	103.5	139.5	1.5	1	9	5S-2LA-HSL019AD
5S-2LA-HSL020AD	100	150	24	1.5	1	35.0	23.0	3 600	2 350	42.5	4 300	20 000	41.3	1.22	118.8	135.8	108.5	144.5	1.5	1	9	5S-2LA-HSL020AD
5S-2LA-HSL021AD	105	160	26	2	1	40.5	26.7	4 100	2 720	49.0	5 000	18 900	44.1	1.55	125.8	144.1	115	154.5	2	1	9	5S-2LA-HSL021AD
5S-2LA-HSL022AD	110	170	28	2	1	50.0	32.5	5 100	3 300	59.5	6 050	17 700	46.9	1.89	132.4	153.2	120	164.5	2	1	9	5S-2LA-HSL022AD
5S-2LA-HSL024AD	120	180	28	2	1	50.5	33.5	5 150	3 450	62.0	6 300	16 700	49.2	2.03	142.4	163.2	130	174.5	2	1	9	5S-2LA-HSL024AD
5S-2LA-HSL026AD	130	200	33	2	1	72.5	46.5	7 350	4 750	85.5	8 750	15 200	55.3	2.98	155.5	181.5	140	194.5	2	1	9	5S-2LA-HSL026AD

1) Minimum allowable value for corner radius dimension r or r_1 .
2) For the details of spacer dimensions, please contact **NTN** Engineering.

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.



Angular Contact Ball Bearings for Radial Loads

ULTAGE Eco-friendly ultra high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-HSFL0 type



Contact angle 25° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed ²⁾ min ⁻¹ oil lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm <i>d</i> ₁ <i>D</i> ₂		Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static								kN	kgf	<i>d</i> _a	<i>D</i> _b	<i>r</i> _{as}	
	mm					kN	kgf	mm	mm	mm	mm				mm	mm						
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{1s min} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)												
5S-2LA-HSFL010AD	50	80	16	1	0.6	11.1	6.20	1 140	635	11.4	1 170	50 000	23.3	0.27	61.6	70.9	55.5	75.5	1	0.6	8.5	5S-2LA-HSFL010AD
5S-2LA-HSFL011AD	55	90	18	1.1	0.6	13.9	7.80	1 420	800	14.4	1 470	44 800	26.0	0.40	68.6	79.2	62	85.5	1	0.6	8.5	5S-2LA-HSFL011AD
5S-2LA-HSFL012AD	60	95	18	1.1	0.6	14.3	8.45	1 460	860	15.5	1 580	41 900	27.2	0.43	73.6	84.2	67	90.5	1	0.6	8.5	5S-2LA-HSFL012AD
5S-2LA-HSFL013AD	65	100	18	1.1	0.6	14.7	9.05	1 500	925	16.7	1 700	39 400	28.3	0.46	78.6	89.2	72	95.5	1	0.6	9	5S-2LA-HSFL013AD
5S-2LA-HSFL014AD	70	110	20	1.1	0.6	18.0	11.1	1 830	1 130	20.4	2 080	36 100	31.1	0.64	85.6	97.5	77	105.5	1	0.6	9	5S-2LA-HSFL014AD
5S-2LA-HSFL015AD	75	115	20	1.1	0.6	18.5	11.9	1 880	1 210	21.8	2 220	34 200	32.3	0.68	90.6	102.5	82	110.5	1	0.6	9	5S-2LA-HSFL015AD
5S-2LA-HSFL016AD	80	125	22	1.1	0.6	22.0	14.2	2 250	1 440	26.0	2 660	31 700	35.0	0.91	97.6	110.8	87	120.5	1	0.6	9	5S-2LA-HSFL016AD
5S-2LA-HSFL017AD	85	130	22	1.1	0.6	22.2	14.7	2 270	1 500	27.0	2 750	30 200	36.2	0.95	102.6	115.8	92	125.5	1	0.6	9	5S-2LA-HSFL017AD
5S-2LA-HSFL018AD	90	140	24	1.5	1	27.1	18.2	2 760	1 860	33.5	3 400	28 300	39.0	1.25	109.8	124.2	98.5	134.5	1.5	1	9	5S-2LA-HSFL018AD
5S-2LA-HSFL019AD	95	145	24	1.5	1	27.3	18.8	2 790	1 920	34.5	3 550	27 100	40.1	1.30	114.8	129.2	103.5	139.5	1.5	1	9	5S-2LA-HSFL019AD
5S-2LA-HSFL020AD	100	150	24	1.5	1	28.1	20.0	2 860	2 040	37.0	3 750	26 000	41.3	1.36	119.8	134.2	108.5	144.5	1.5	1	9	5S-2LA-HSFL020AD

1) Minimum allowable value for corner radius dimension r or r_1 .

2) If the bearing operating speed exceeds 70 % of the rated allowable speed, please contact NTN Engineering.

3) For the details of spacer dimensions, please contact NTN Engineering.

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$


Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.



Angular Contact Ball Bearings for Radial Loads

ULTAGE Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (ceramic ball spec.)
5S-2LA-HSEW9U type

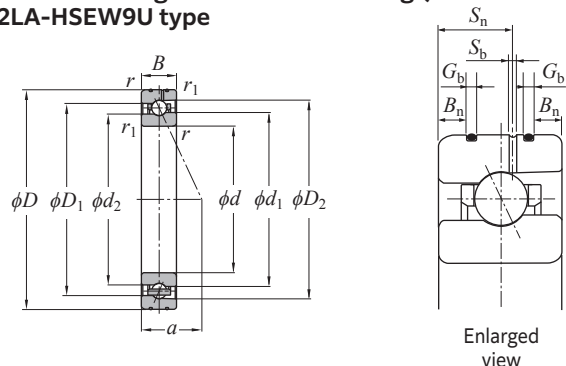

Contact angle 20° d 50–100 mm

Part number	Boundary dimensions										Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ oil lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions				Abutment and fillet dimensions					
											dynamic	static	dynamic	static															
	mm										kN	kgf	mm							<i>d</i> _a	<i>d</i> _b	<i>D</i> _a	<i>D</i> _b	<i>r</i> _{as}	<i>r</i> _{las}				
	<i>d</i>	<i>D</i>	<i>B</i>	<i>B</i> _n	<i>S</i> _n	<i>S</i> _b	<i>G</i> _b	<i>r</i> _s min ⁽¹⁾	<i>r</i> _{ls} min ⁽¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>d</i> ₁	<i>d</i> ₂				<i>D</i> ₁	<i>D</i> ₂	min	min	max	max	max	max		
5S-2LA-HSEW910U	50	72	12	2.2	6.6	1.2	1.3	0.6	0.3	11.8	5.50	1 210	560	8.55	875	46 100	17.2	0.12	57.6	56.6	64.4	66.8	54.5	52.5	67.5	69.5	0.6	0.3	
5S-2LA-HSEW911U	55	80	13	2.8	7.2	1.2	1.3	1	0.6	14.7	6.85	1 500	700	10.6	1 090	41 700	18.9	0.17	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6	
5S-2LA-HSEW912U	60	85	13	2.8	7.2	1.2	1.3	1	0.6	15.3	7.50	1 560	765	11.6	1 190	38 800	19.8	0.18	68.6	67.4	76.4	79.1	65.5	64.5	79.5	80.5	1	0.6	
5S-2LA-HSEW913U	65	90	13	2.8	7.2	1.2	1.3	1	0.6	15.4	7.85	1 570	800	12.2	1 250	36 300	20.7	0.19	73.6	72.4	81.4	84.0	70.5	69.5	84.5	85.5	1	0.6	
5S-2LA-HSEW914U	70	100	16	3.1	9.3	1.4	1.9	1	0.6	22.6	11.2	2 310	1 140	17.4	1 780	33 100	23.6	0.31	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6	
5S-2LA-HSEW915U	75	105	16	3.1	9.3	1.4	1.9	1	0.6	23.5	12.2	2 390	1 240	19.0	1 940	31 300	24.5	0.33	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6	
5S-2LA-HSEW916U	80	110	16	3.1	9.3	1.4	1.9	1	0.6	23.7	12.7	2 420	1 290	19.8	2 020	29 600	25.4	0.34	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6	
5S-2LA-HSEW917U	85	120	18	4	10.4	1.6	1.9	1.1	0.6	32.0	16.8	3 300	1 710	26.1	2 670	27 400	27.8	0.48	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6	
5S-2LA-HSEW918U	90	125	18	4	10.4	1.6	1.9	1.1	0.6	33.5	18.1	3 400	1 850	28.3	2 890	26 200	28.7	0.51	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6	
5S-2LA-HSEW919U	95	130	18	4	10.4	1.6	1.9	1.1	0.6	34.0	18.9	3 450	1 930	29.4	3 000	25 000	29.6	0.53	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6	
5S-2LA-HSEW920U	100	140	20	4	12	1.6	1.9	1.1	0.6	39.5	22.1	4 000	2 260	34.0	3 500	23 400	32.0	0.74	113.8	111.7	126.2	130.6	107	104.5	133	135.5	1	0.6	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

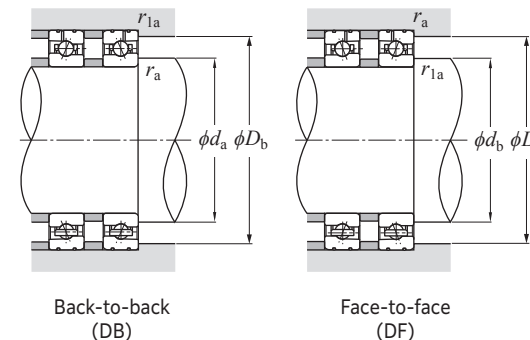


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (ceramic ball spec.)
5S-2LA-HSEW9U type

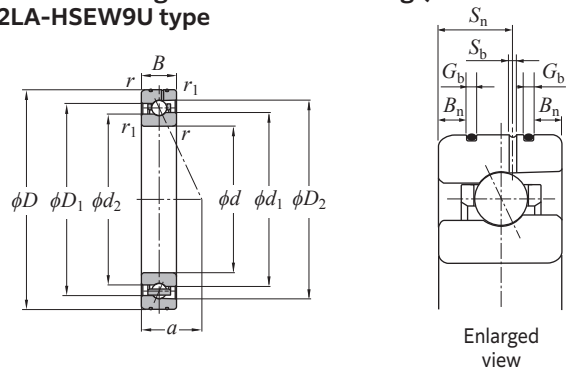

Contact angle 25° d 50–100 mm

Part number	Boundary dimensions										Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ oil lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions				Abutment and fillet dimensions					
	mm										dynamic kN	static kgf	dynamic kgf	static kN						mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>B_n</i>	<i>S_n</i>	<i>S_b</i>	<i>G_b</i>	<i>r_s</i> min ⁻¹	<i>r_{1s}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	<i>d₁</i>	<i>d₂</i>				<i>D₁</i>	<i>D₂</i>	<i>d_a</i> min	<i>d_b</i> min	<i>D_a</i> max	<i>D_b</i> max	<i>r_{as}</i> max	<i>r_{1as}</i> max		
5S-2LA-HSEW910UAD	50	72	12	2.2	6.6	1.2	1.3	0.6	0.3	11.4	5.30	1 170	545	9.75	995	41 000	20.3	0.12	57.6	56.6	64.4	66.7	54.5	52.5	67.5	69.5	0.6	0.3	
5S-2LA-HSEW911UAD	55	80	13	2.8	7.2	1.2	1.3	1	0.6	14.3	6.65	1 450	680	12.1	1 240	37 000	22.4	0.17	63.6	62.4	71.4	74.1	60.5	59.5	74.5	75.5	1	0.6	
5S-2LA-HSEW912UAD	60	85	13	2.8	7.2	1.2	1.3	1	0.6	14.8	7.25	1 510	740	13.3	1 360	34 500	23.5	0.18	68.6	67.4	76.4	79.0	65.5	64.5	79.5	80.5	1	0.6	
5S-2LA-HSEW913UAD	65	90	13	2.8	7.2	1.2	1.3	1	0.6	14.9	7.60	1 520	775	13.9	1 420	32 300	24.7	0.19	73.6	72.4	81.4	84.0	70.5	69.5	84.5	85.5	1	0.6	
5S-2LA-HSEW914UAD	70	100	16	3.1	9.3	1.4	1.9	1	0.6	21.9	10.8	2 230	1 100	19.9	2 030	29 400	28.0	0.31	80.1	78.6	89.8	93.2	75.5	74.5	94.5	95.5	1	0.6	
5S-2LA-HSEW915UAD	75	105	16	3.1	9.3	1.4	1.9	1	0.6	22.7	11.8	2 310	1 200	21.5	2 200	27 800	29.1	0.33	85.1	83.6	94.8	98.2	80.5	79.5	99.5	100.5	1	0.6	
5S-2LA-HSEW916UAD	80	110	16	3.1	9.3	1.4	1.9	1	0.6	23.0	12.3	2 340	1 250	22.5	2 300	26 300	30.3	0.34	90.1	88.6	99.8	103.2	85.5	84.5	104.5	105.5	1	0.6	
5S-2LA-HSEW917UAD	85	120	18	4	10.4	1.6	1.9	1.1	0.6	31.0	16.2	3 150	1 660	29.4	3 000	24 400	33.1	0.48	96.8	94.9	108.2	112.3	92	89.5	113	115.5	1	0.6	
5S-2LA-HSEW918UAD	90	125	18	4	10.4	1.6	1.9	1.1	0.6	32.5	17.6	3 300	1 790	31.5	3 250	23 300	34.2	0.51	101.8	99.9	113.2	117.3	97	94.5	118	120.5	1	0.6	
5S-2LA-HSEW919UAD	95	130	18	4	10.4	1.6	1.9	1.1	0.6	32.5	18.3	3 350	1 870	33.0	3 400	22 200	35.4	0.53	106.8	104.9	118.2	122.3	102	99.5	123	125.5	1	0.6	
5S-2LA-HSEW920UAD	100	140	20	4	12	1.6	1.9	1.1	0.6	38.0	21.4	3 850	2 190	39.0	4 000	20 800	38.2	0.74	113.8	111.7	126.2	130.6	107	104.5	133	135.5	1	0.6	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

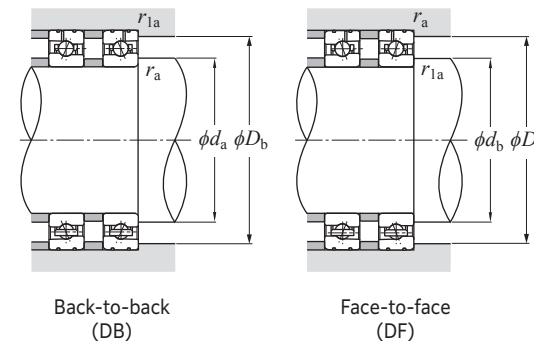


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (ceramic ball spec.)
5S-2LA-HSEW0 type

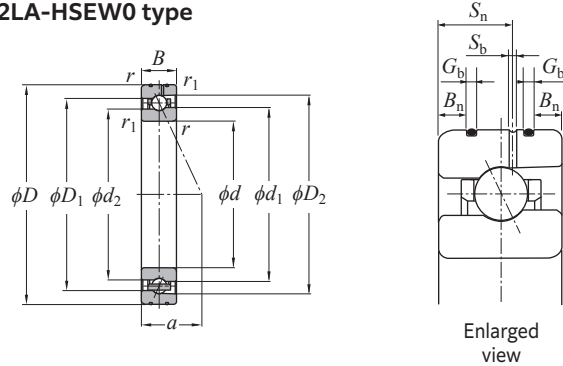

Contact angle 20° d 50–100 mm

Part number	Boundary dimensions										Basic load ratings				Allowable axial load		Allowable speed min ⁻¹	Load center mm	Mass kg Single-row (approx.)	Reference dimensions				Abutment and fillet dimensions					
	mm										dynamic kN	static kgf	dynamic kgf	static kgf						mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>B_n</i>	<i>S_n</i>	<i>S_b</i>	<i>G_b</i>	<i>r_s min¹⁾</i>	<i>r_{1s} min¹⁾</i>	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	oil lubrication	<i>a</i>				<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max
5S-2LA-HSEW010	50	80	16	3.4	9.3	1.4	1.3	1	0.6	17.2	7.75	1 750	790	12.1	1 230	43 300	19.9	0.23	60.1	58.6	69.9	73.2	55.5	54.5	74.5	75.5	1	0.6	
5S-2LA-HSEW011	55	90	18	4.3	9.7	1.4	1.9	1.1	0.6	18.7	9.20	1 900	935	14.4	1 460	38 800	22.3	0.37	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6	
5S-2LA-HSEW012	60	95	18	4.3	9.7	1.4	1.9	1.1	0.6	19.5	10.2	1 990	1 040	15.9	1 620	36 300	23.2	0.40	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6	
5S-2LA-HSEW013	65	100	18	4	10.4	1.6	1.9	1.1	0.6	19.8	10.7	2 020	1 090	16.7	1 710	34 100	24.1	0.42	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6	
5S-2LA-HSEW014	70	110	20	4	11.6	1.6	1.9	1.1	0.6	24.2	13.5	2 470	1 370	21.1	2 150	31 200	26.5	0.60	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6	
5S-2LA-HSEW015	75	115	20	4	11.6	1.6	2.4	1.1	0.6	25.8	15.2	2 630	1 550	23.8	2 420	29 600	27.4	0.64	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6	
5S-2LA-HSEW016	80	125	22	4.7	12.2	1.6	2.4	1.1	0.6	29.6	17.4	3 000	1 770	27.2	2 780	27 400	29.8	0.86	96.8	94.9	108.2	112.5	87	84.5	118	120.5	1	0.6	
5S-2LA-HSEW017	85	130	22	4.7	12.2	1.6	2.4	1.1	0.6	30.0	18.1	3 050	1 850	28.4	2 900	26 200	30.7	0.90	101.8	99.9	113.2	117.4	92	89.5	123	125.5	1	0.6	
5S-2LA-HSEW018	90	140	24	5.5	14.5	1.6	1.9	1.5	1	34.5	21.3	3 550	2 170	33.5	3 400	24 500	33.1	1.18	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1	
5S-2LA-HSEW019	95	145	24	5.5	14.5	1.6	2.4	1.5	1	35.0	22.1	3 600	2 260	34.5	3 550	23 400	34.0	1.23	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1	
5S-2LA-HSEW020	100	150	24	5.5	14.5	1.6	1.9	1.5	1	36.5	23.8	3 700	2 420	37.5	3 800	22 500	34.9	1.28	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = XF_r + YF_a$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

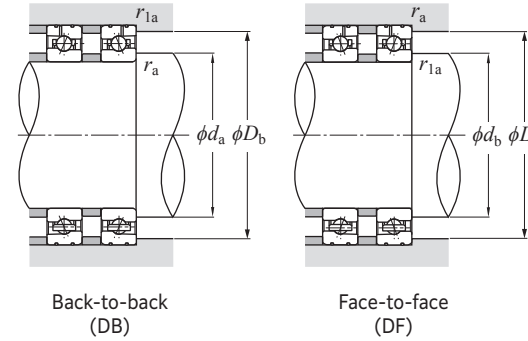


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Air-oil lubricated high speed angular contact ball bearings with re-lubricating hole on the outer ring (ceramic ball spec.)
5S-2LA-HSEW0 type

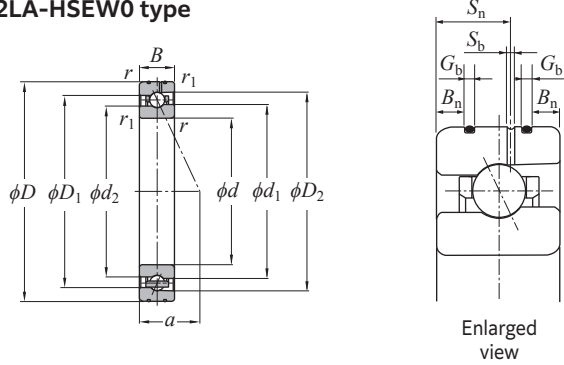

Contact angle 25° d 50–100 mm

Part number	Boundary dimensions										Basic load ratings				Allowable axial load		Allowable speed min ⁻¹	Load center mm	Mass kg	Reference dimensions				Abutment and fillet dimensions					
	mm										dynamic kN	static kgf	dynamic kgf	static kgf						mm				mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>B_n</i>	<i>S_n</i>	<i>S_b</i>	<i>G_b</i>	<i>r_s</i> min ⁻¹	<i>r_{ls}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	oil lubrication	<i>a</i>				Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂	<i>d_a</i> min	<i>d_b</i> min	<i>D_a</i> max	<i>D_b</i> max	<i>r_{as}</i> max
5S-2LA-HSEW010AD	50	80	16	3.4	9.3	1.4	1.3	1	0.6	16.6	7.50	1 700	765	13.8	1 400	38 500	23.3	0.23	60.1	58.6	69.9	73.2	55.5	54.5	74.5	75.5	1	0.6	
5S-2LA-HSEW011AD	55	90	18	4.3	9.7	1.4	1.9	1.1	0.6	18.1	8.90	1 840	910	16.4	1 670	34 500	26.1	0.37	67.6	66.2	77.4	80.8	62	59.5	83	85.5	1	0.6	
5S-2LA-HSEW012AD	60	95	18	4.3	9.7	1.4	1.9	1.1	0.6	18.9	9.85	1 930	1 000	18.1	1 850	32 300	27.2	0.40	72.6	71.2	82.4	85.8	67	64.5	88	90.5	1	0.6	
5S-2LA-HSEW013AD	65	100	18	4	10.4	1.6	1.9	1.1	0.6	19.2	10.4	1 960	1 060	19.0	1 940	30 300	28.4	0.42	77.6	76.2	87.4	90.8	72	69.5	93	95.5	1	0.6	
5S-2LA-HSEW014AD	70	110	20	4	11.6	1.6	1.9	1.1	0.6	23.4	13.0	2 390	1 330	24.0	2 440	27 800	31.1	0.60	84.8	83.0	95.2	99.1	77	74.5	103	105.5	1	0.6	
5S-2LA-HSEW015AD	75	115	20	4	11.6	1.6	2.4	1.1	0.6	25.0	14.7	2 550	1 500	27.0	2 760	26 300	32.3	0.64	89.8	88.0	100.2	104.1	82	79.5	108	110.5	1	0.6	
5S-2LA-HSEW016AD	80	125	22	4.7	12.2	1.6	2.4	1.1	0.6	28.6	16.9	2 910	1 720	31.0	3 150	24 400	35.1	0.86	96.8	94.9	108.2	112.4	87	84.5	118	120.5	1	0.6	
5S-2LA-HSEW017AD	85	130	22	4.7	12.2	1.6	2.4	1.1	0.6	28.9	17.6	2 950	1 790	32.5	3 300	23 300	36.2	0.90	101.8	99.9	113.2	117.4	92	89.5	123	125.5	1	0.6	
5S-2LA-HSEW018AD	90	140	24	5.5	14.5	1.6	1.9	1.5	1	33.5	20.6	3 400	2 100	38.0	3 850	21 700	39.0	1.18	108.8	106.7	121.2	125.8	98.5	95.5	131.5	134.5	1.5	1	
5S-2LA-HSEW019AD	95	145	24	5.5	14.5	1.6	2.4	1.5	1	34.0	21.4	3 450	2 190	39.5	4 000	20 800	40.2	1.23	113.8	111.7	126.2	130.8	103.5	100.5	136.5	139.5	1.5	1	
5S-2LA-HSEW020AD	100	150	24	5.5	14.5	1.6	1.9	1.5	1	35.0	23.0	3 600	2 350	42.5	4 300	20 000	41.3	1.28	118.8	116.7	131.2	135.8	108.5	105.5	141.5	144.5	1.5	1	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

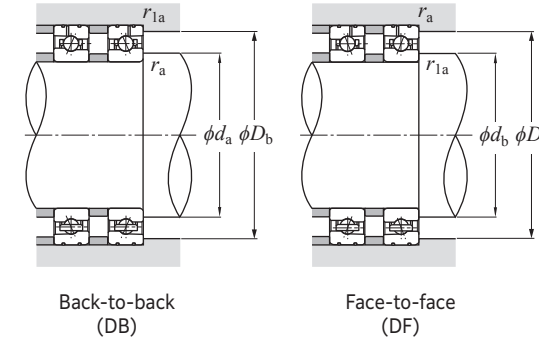


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings (steel ball spec.)
79 LLB type



Contact angle 15° d 10–50 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm		Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static									d _a min	D _a max	D _b max	r _{as} max	r _{las} max	
	mm					kN		kgf	kN	kgf													
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{smin} ¹⁾	<i>r</i> _{lsmin} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀							<i>d</i> ₁	<i>D</i> ₁				
7900CDLLB	10	22	6	0.3	0.15	3.35	1.52	340	155	1.91	194	14.1	75 700	5.2	0.010	12.9	19.7	12.5	19.7	20.8	0.3	0.15	7900CDLLB
7901CDLLB	12	24	6	0.3	0.15	3.70	1.86	380	189	2.34	239	14.7	67 300	5.4	0.012	15.2	21.7	14.5	21.7	22.8	0.3	0.15	7901CDLLB
7902CDLLB	15	28	7	0.3	0.15	5.55	2.86	570	292	3.60	370	14.5	56 300	6.4	0.017	18.5	26.0	17.5	26.0	26.8	0.3	0.15	7902CDLLB
7903CDLLB	17	30	7	0.3	0.15	5.85	3.15	595	320	4.00	405	14.8	51 500	6.7	0.019	20.2	28.0	19.5	28.0	28.8	0.3	0.15	7903CDLLB
7904CDLLB	20	37	9	0.3	0.15	8.10	4.55	825	465	5.75	590	14.9	42 500	8.4	0.039	23.9	33.9	22.5	34.5	35.8	0.3	0.15	7904CDLLB
7905CDLLB	25	42	9	0.3	0.15	9.05	5.75	925	585	7.30	745	15.5	36 100	9.0	0.046	29.1	38.9	27.5	39.5	40.8	0.3	0.15	7905CDLLB
7906CDLLB	30	47	9	0.3	0.15	9.55	6.60	975	675	8.40	860	15.9	31 400	9.7	0.053	34.6	43.9	32.5	44.5	45.8	0.3	0.15	7906CDLLB
7907CDLLB	35	55	10	0.6	0.3	13.0	9.50	1 330	970	12.1	1 230	15.9	26 900	11.1	0.081	40.2	51.2	39.5	51.2	52.5	0.6	0.3	7907CDLLB
7908CDLLB	40	62	12	0.6	0.3	19.5	13.8	1 980	1 400	17.5	1 780	15.5	23 700	12.9	0.11	45.3	58.8	44.5	58.8	59.5	0.6	0.3	7908CDLLB
7909CDLLB	45	68	12	0.6	0.3	20.6	15.6	2 100	1 590	19.8	2 020	15.8	21 400	13.6	0.13	50.8	64.3	49.5	64.3	65.5	0.6	0.3	7909CDLLB
7910CDLLB	50	72	12	0.6	0.3	17.6	14.7	1 800	1 490	18.6	1 900	16.4	20 000	14.2	0.14	55.2	67.5	54.5	67.5	69.5	0.6	0.3	7910CDLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38				1.47		1.65		2.39
0.357	0.4				1.4		1.57		2.28
0.714	0.43				1.3		1.46		2.11
1.07	0.46				1.23		1.38		2
1.43	0.47	1	0	0.44	1.19	1	1.34	0.72	1.93
2.14	0.5				1.12		1.26		1.82
3.57	0.55				1.02		1.14		1.66
5.35	0.56				1		1.12		1.63
7.14	0.56				1		1.12		1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(steel ball spec.)
79 LLB type

Dimension
Tables

NTN



Contact angle 25° d 10–50 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹	Load center mm	Mass kg	Reference dimensions		Abutment and fillet dimensions					Part number		
						dynamic	static	dynamic	static								d _a	D _a	D _b	r _{as}	r _{las}			
	mm					kN		kgf	kN	kgf	grease lubrication				a	Single-row (approx.)	d ₁	D ₁	min	max	max		max	max
	d	D	B	r _{smin} ¹⁾	r _{lsmin} ¹⁾	C _r	C _{0r}	C _r	C _{0r}	(static)														
7900ADLLB	10	22	6	0.3	0.15	3.20	1.45	325	148	2.20	225	65 600	6.8	0.010	12.9	19.7	12.5	19.7	20.8	0.3	0.15	7900ADLLB		
7901ADLLB	12	24	6	0.3	0.15	3.55	1.77	360	181	2.61	267	58 300	7.2	0.012	15.2	21.7	14.5	21.7	22.8	0.3	0.15	7901ADLLB		
7902ADLLB	15	28	7	0.3	0.15	5.30	2.74	540	279	4.40	450	48 800	8.6	0.017	18.5	26.0	17.5	26.0	26.8	0.3	0.15	7902ADLLB		
7903ADLLB	17	30	7	0.3	0.15	5.55	3.00	565	305	4.75	485	44 700	9.0	0.019	20.2	28.0	19.5	28.0	28.8	0.3	0.15	7903ADLLB		
7904ADLLB	20	37	9	0.3	0.15	7.70	4.35	785	445	6.35	645	36 800	11.2	0.039	23.9	33.9	22.5	34.5	35.8	0.3	0.15	7904ADLLB		
7905ADLLB	25	42	9	0.3	0.15	8.60	5.50	875	560	7.75	790	31 300	12.4	0.046	29.1	38.9	27.5	39.5	40.8	0.3	0.15	7905ADLLB		
7906ADLLB	30	47	9	0.3	0.15	9.00	6.30	920	640	8.65	885	27 300	13.5	0.053	34.6	43.9	32.5	44.5	45.8	0.3	0.15	7906ADLLB		
7907ADLLB	35	55	10	0.6	0.3	12.3	9.00	1 260	920	13.1	1 340	23 300	15.6	0.081	40.2	51.2	39.5	51.2	52.5	0.6	0.3	7907ADLLB		
7908ADLLB	40	62	12	0.6	0.3	18.4	13.1	1 880	1 330	19.3	1 960	20 600	18.0	0.11	45.3	58.8	44.5	58.8	59.5	0.6	0.3	7908ADLLB		
7909ADLLB	45	68	12	0.6	0.3	19.5	14.8	1 980	1 510	21.5	2 190	18 600	19.3	0.13	50.8	64.3	49.5	64.3	65.5	0.6	0.3	7909ADLLB		
7910ADLLB	50	72	12	0.6	0.3	16.6	13.9	1 700	1 420	13.6	1 380	17 400	20.2	0.14	55.2	67.5	54.5	67.5	69.5	0.6	0.3	7910ADLLB		

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

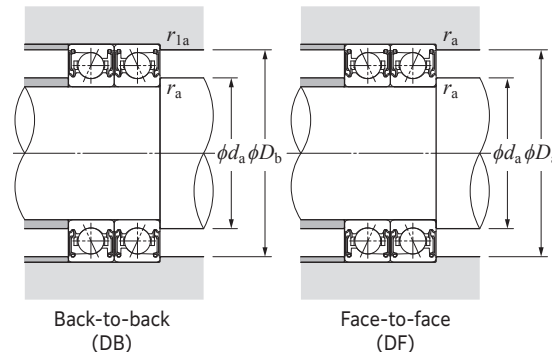


Back-to-back
(DB)

Face-to-face
(DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(steel ball spec.)
70 LLB type



Contact angle 15° d 10–50 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions		Abutment and fillet dimensions					Part number
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf					mm		<i>d</i> _a min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{las} max	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{smin⁻¹}	<i>r</i> _{lsmin⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀					<i>d</i> ₁	<i>D</i> ₁						
7000CDLLB	10	26	8	0.3	0.15	5.90	2.49	600	254	3.10	315	12.6	67 300	6.4	0.018	14.5	23.4	12.5	23.5	24.8	0.3	0.15	7000CDLLB
7001CDLLB	12	28	8	0.3	0.15	6.40	2.90	655	296	3.65	370	13.2	60 600	6.7	0.022	16.5	25.4	14.5	25.5	26.8	0.3	0.15	7001CDLLB
7002CDLLB	15	32	9	0.3	0.15	6.90	3.40	705	345	4.25	435	14.0	51 500	7.7	0.032	19.5	28.8	17.5	29.5	30.8	0.3	0.15	7002CDLLB
7003CDLLB	17	35	10	0.3	0.15	9.10	4.50	930	460	5.70	580	13.8	46 600	8.5	0.040	21.3	32.2	19.5	32.5	33.8	0.3	0.15	7003CDLLB
7004CDLLB	20	42	12	0.6	0.3	11.6	6.00	1 180	610	7.55	770	14.0	39 100	10.2	0.070	26.0	38.0	24.5	38.0	39.5	0.6	0.3	7004CDLLB
7005CDLLB	25	47	12	0.6	0.3	13.6	8.00	1 390	815	10.1	1 030	14.7	33 600	10.9	0.083	30.4	43.1	29.5	43.1	44.5	0.6	0.3	7005CDLLB
7006CDLLB	30	55	13	1	0.6	16.8	10.3	1 710	1 050	13.0	1 320	14.9	28 500	12.2	0.11	36.4	50.4	35.5	50.4	50.5	1	0.6	7006CDLLB
7007CDLLB	35	62	14	1	0.6	21.2	13.7	2 160	1 390	17.3	1 760	15.0	25 000	13.6	0.16	41.9	57.2	40.5	57.2	57.5	1	0.6	7007CDLLB
7008CDLLB	40	68	15	1	0.6	22.8	15.9	2 320	1 620	20.1	2 050	15.4	22 400	14.8	0.19	47.9	62.7	45.5	62.7	63.5	1	0.6	7008CDLLB
7009CDLLB	45	75	16	1	0.6	30.5	21.1	3 100	2 160	26.7	2 730	15.1	20 200	16.1	0.24	53.0	70.3	50.5	70.3	70.5	1	0.6	7009CDLLB
7010CDLLB	50	80	16	1	0.6	31.5	22.9	3 250	2 330	29.0	2 960	15.4	18 600	16.8	0.26	58.0	75.3	55.5	75.3	75.5	1	0.6	7010CDLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38				1.47		1.65		2.39
0.357	0.4				1.4		1.57		2.28
0.714	0.43				1.3		1.46		2.11
1.07	0.46				1.23		1.38		2
1.43	0.47	1	0	0.44	1.19	1	1.34	0.72	1.93
2.14	0.5				1.12		1.26		1.82
3.57	0.55				1.02		1.14		1.66
5.35	0.56				1		1.12		1.63
7.14	0.56				1		1.12		1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(steel ball spec.)
70 LLB type

Dimension
Tables

NTN



Contact angle 25° d 10–50 mm


Part number	Boundary dimensions					Basic load ratings				Allowable		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference		Abutment and fillet dimensions					Part number
	mm					dynamic	static	dynamic	static	axial load kN kgf (static)	dimensions mm <i>d</i> ₁ <i>D</i> ₁				<i>d</i> _a min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max			
						kN		kgf														
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{smin} ¹⁾	<i>r</i> _{lsmin} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}													
7000ADLLB	10	26	8	0.3	0.15	5.70	2.41	580	245	3.85	395	58 300	8.3	0.018	14.5	23.4	12.5	23.5	24.8	0.3	0.15	7000ADLLB
7001ADLLB	12	28	8	0.3	0.15	6.20	2.79	630	285	4.50	455	52 500	8.7	0.022	16.5	25.4	14.5	25.5	26.8	0.3	0.15	7001ADLLB
7002ADLLB	15	32	9	0.3	0.15	6.60	3.25	675	330	4.95	505	44 700	10.0	0.032	19.5	28.8	17.5	29.5	30.8	0.3	0.15	7002ADLLB
7003ADLLB	17	35	10	0.3	0.15	8.75	4.35	890	445	6.95	710	40 400	11.1	0.040	21.3	32.2	19.5	32.5	33.8	0.3	0.15	7003ADLLB
7004ADLLB	20	42	12	0.6	0.3	11.1	5.75	1 130	585	8.80	900	33 900	13.3	0.070	26.0	38.0	24.5	38.0	39.5	0.6	0.3	7004ADLLB
7005ADLLB	25	47	12	0.6	0.3	13.0	7.65	1 320	780	11.3	1 150	29 200	14.5	0.083	30.4	43.1	29.5	43.1	44.5	0.6	0.3	7005ADLLB
7006ADLLB	30	55	13	1	0.6	16.0	9.80	1 630	995	14.9	1 520	24 700	16.5	0.11	36.4	50.4	35.5	50.4	50.5	1	0.6	7006ADLLB
7007ADLLB	35	62	14	1	0.6	20.1	13.0	2 050	1 330	20.4	2 080	21 600	18.4	0.16	41.9	57.2	40.5	57.2	57.5	1	0.6	7007ADLLB
7008ADLLB	40	68	15	1	0.6	21.6	15.1	2 200	1 540	23.2	2 370	19 400	20.2	0.19	47.9	62.7	45.5	62.7	63.5	1	0.6	7008ADLLB
7009ADLLB	45	75	16	1	0.6	29.1	20.1	2 970	2 050	31.0	3 150	17 500	22.1	0.24	53.0	70.3	50.5	70.3	70.5	1	0.6	7009ADLLB
7010ADLLB	50	80	16	1	0.6	30.0	21.8	3 050	2 220	33.0	3 350	16 200	23.3	0.26	58.0	75.3	55.5	75.3	75.5	1	0.6	7010ADLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

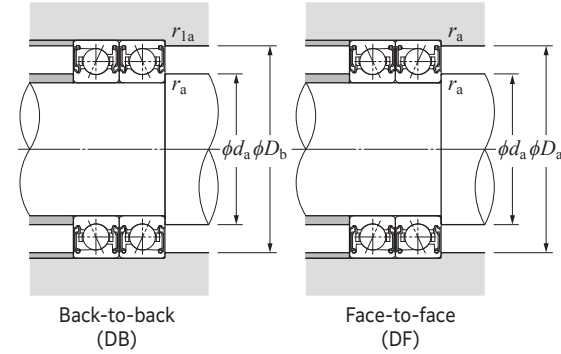

Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load


$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(ceramic ball spec.)
5S-79 LLB type



Contact angle 15° d 10–50 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed min ⁻¹	Load center mm	Mass kg	Reference dimensions		Abutment and fillet dimensions					Part number
	mm					dynamic kN	static	dynamic	static	kN	kgf					mm		mm	mm	mm	mm	mm	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{smin} ⁽¹⁾	<i>r</i> _{lsmin} ⁽¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀					grease lubrication	<i>a</i>	Single-row (approx.)	<i>d</i> ₁	<i>D</i> ₁	<i>d</i> _a min	<i>D</i> _a max	
5S-7900CDLLB	10	22	6	0.3	0.15	3.35	1.05	340	107	1.19	121	9.8	89 800	5.2	0.009	12.9	19.7	12.5	19.7	20.8	0.3	0.15	5S-7900CDLLB
5S-7901CDLLB	12	24	6	0.3	0.15	3.70	1.29	380	131	1.46	149	10.2	79 800	5.4	0.011	15.2	21.7	14.5	21.7	22.8	0.3	0.15	5S-7901CDLLB
5S-7902CDLLB	15	28	7	0.3	0.15	5.55	1.98	570	202	2.25	230	10.0	66 800	6.4	0.015	18.5	26.0	17.5	26.0	26.8	0.3	0.15	5S-7902CDLLB
5S-7903CDLLB	17	30	7	0.3	0.15	5.85	2.19	595	223	2.49	254	10.3	61 100	6.7	0.017	20.2	28.0	19.5	28.0	28.8	0.3	0.15	5S-7903CDLLB
5S-7904CDLLB	20	37	9	0.3	0.15	8.10	3.15	825	325	3.60	365	10.3	50 400	8.4	0.036	23.9	33.9	22.5	34.5	35.8	0.3	0.15	5S-7904CDLLB
5S-7905CDLLB	25	42	9	0.3	0.15	9.05	4.00	925	405	4.55	465	10.7	42 900	9.0	0.042	29.1	38.9	27.5	39.5	40.8	0.3	0.15	5S-7905CDLLB
5S-7906CDLLB	30	47	9	0.3	0.15	9.55	4.60	975	470	5.25	535	11.0	37 300	9.7	0.048	34.6	43.9	32.5	44.5	45.8	0.3	0.15	5S-7906CDLLB
5S-7907CDLLB	35	55	10	0.6	0.3	13.0	6.60	1 330	670	7.55	770	11.0	31 900	11.1	0.073	40.2	51.2	39.5	51.2	52.5	0.6	0.3	5S-7907CDLLB
5S-7908CDLLB	40	62	12	0.6	0.3	19.5	9.55	1 980	975	10.9	1 110	10.8	28 200	12.9	0.099	45.3	58.8	44.5	58.8	59.5	0.6	0.3	5S-7908CDLLB
5S-7909CDLLB	45	68	12	0.6	0.3	20.6	10.8	2 100	1 100	12.4	1 260	11.0	24 100	13.6	0.12	50.8	64.3	49.5	64.3	65.5	0.6	0.3	5S-7909CDLLB
5S-7910CDLLB	50	72	12	0.6	0.3	17.6	10.2	1 800	1 040	11.7	1 190	11.3	22 500	14.2	0.12	55.2	67.5	54.5	67.5	69.5	0.6	0.3	5S-7910CDLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38				1.47		1.65		2.39
0.357	0.4				1.4		1.57		2.28
0.714	0.43				1.3		1.46		2.11
1.07	0.46				1.23		1.38		2
1.43	0.47	1	0	0.44	1.19	1	1.34	0.72	1.93
2.14	0.5				1.12		1.26		1.82
3.57	0.55				1.02		1.14		1.66
5.35	0.56				1		1.12		1.63
7.14	0.56				1		1.12		1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(ceramic ball spec.)
5S-79 LLB type



Contact angle 25° d 10–50 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm		Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static								<i>d</i> _a min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max	
	mm					kN				kgf					mm							
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{smin} ¹⁾	<i>r</i> _{lsmin} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>d</i> ₁				<i>D</i> ₁	<i>d</i> _a min	<i>D</i> _a max	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max		
5S-7900ADLLB	10	22	6	0.3	0.15	3.20	1.01	325	103	1.52	155	79 700	6.8	0.009	12.9	19.7	12.5	19.7	20.8	0.3	0.15	5S-7900ADLLB
5S-7901ADLLB	12	24	6	0.3	0.15	3.55	1.23	360	125	1.86	189	70 800	7.2	0.011	15.2	21.7	14.5	21.7	22.8	0.3	0.15	5S-7901ADLLB
5S-7902ADLLB	15	28	7	0.3	0.15	5.30	1.90	540	193	2.86	292	59 300	8.6	0.015	18.5	26.0	17.5	26.0	26.8	0.3	0.15	5S-7902ADLLB
5S-7903ADLLB	17	30	7	0.3	0.15	5.55	2.09	565	213	3.15	320	54 300	9.0	0.017	20.2	28.0	19.5	28.0	28.8	0.3	0.15	5S-7903ADLLB
5S-7904ADLLB	20	37	9	0.3	0.15	7.70	3.00	785	310	4.55	465	44 700	11.2	0.036	23.9	33.9	22.5	34.5	35.8	0.3	0.15	5S-7904ADLLB
5S-7905ADLLB	25	42	9	0.3	0.15	8.60	3.80	875	385	5.75	585	38 100	12.4	0.042	29.1	38.9	27.5	39.5	40.8	0.3	0.15	5S-7905ADLLB
5S-7906ADLLB	30	47	9	0.3	0.15	9.00	4.35	920	445	6.60	670	33 100	13.5	0.048	34.6	43.9	32.5	44.5	45.8	0.3	0.15	5S-7906ADLLB
5S-7907ADLLB	35	55	10	0.6	0.3	12.3	6.25	1 260	635	9.45	965	28 300	15.6	0.073	40.2	51.2	39.5	51.2	52.5	0.6	0.3	5S-7907ADLLB
5S-7908ADLLB	40	62	12	0.6	0.3	18.4	9.05	1 880	925	13.7	1 400	25 000	18.0	0.099	45.3	58.8	44.5	58.8	59.5	0.6	0.3	5S-7908ADLLB
5S-7909ADLLB	45	68	12	0.6	0.3	19.5	10.3	1 980	1 050	15.6	1 590	21 400	19.3	0.12	50.8	64.3	49.5	64.3	65.5	0.6	0.3	5S-7909ADLLB
5S-7910ADLLB	50	72	12	0.6	0.3	16.6	9.60	1 700	980	14.6	1 490	20 000	20.2	0.12	55.2	67.5	54.5	67.5	69.5	0.6	0.3	5S-7910ADLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.38	1	0.76


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(ceramic ball spec.)
5S-70 LLB type



Contact angle 15° d 10–50 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed	Load center	Mass	Reference dimensions		Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static									kN	kgf	mm	mm	mm	
						kN	kgf	kg	mm	mm	mm					mm	mm	mm	mm	mm			
	d	D	B	$r_{smin}^{1)}$	$r_{lsmin}^{1)}$	C_r	C_{0r}	C_r	C_{0r}	(static)	f_0					grease lubrication	a	Single-row (approx.)	d_1	D_1	d_a min	D_a max	
5S-7000CDLLB	10	26	8	0.3	0.15	5.90	1.73	600	176	1.93	197	8.8	80 600	6.4	0.014	14.5	23.4	12.5	23.5	24.8	0.3	0.15	5S-7000CDLLB
5S-7001CDLLB	12	28	8	0.3	0.15	6.40	2.01	655	205	2.26	231	9.2	72 600	6.7	0.020	16.5	25.4	14.5	25.5	26.8	0.3	0.15	5S-7001CDLLB
5S-7002CDLLB	15	32	9	0.3	0.15	6.90	2.35	705	239	2.66	271	9.7	61 800	7.7	0.029	19.5	28.8	17.5	29.5	30.8	0.3	0.15	5S-7002CDLLB
5S-7003CDLLB	17	35	10	0.3	0.15	9.10	3.15	930	320	3.55	360	9.6	55 800	8.5	0.035	21.3	32.2	19.5	32.5	33.8	0.3	0.15	5S-7003CDLLB
5S-7004CDLLB	20	42	12	0.6	0.3	11.6	4.15	1 180	425	4.70	480	9.7	46 800	10.2	0.064	26.0	38.0	24.5	38.0	39.5	0.6	0.3	5S-7004CDLLB
5S-7005CDLLB	25	47	12	0.6	0.3	13.6	5.55	1 390	565	6.30	640	10.2	40 300	10.9	0.075	30.4	43.1	29.5	43.1	44.5	0.6	0.3	5S-7005CDLLB
5S-7006CDLLB	30	55	13	1	0.6	16.8	7.10	1 710	725	8.10	825	10.3	34 100	12.2	0.096	36.4	50.4	35.5	50.4	50.5	1	0.6	5S-7006CDLLB
5S-7007CDLLB	35	62	14	1	0.6	21.2	9.45	2 160	965	10.8	1 100	10.4	29 900	13.6	0.14	41.9	57.2	40.5	57.2	57.5	1	0.6	5S-7007CDLLB
5S-7008CDLLB	40	68	15	1	0.6	22.8	11.0	2 320	1 120	12.6	1 280	10.6	26 900	14.8	0.17	47.9	62.7	45.5	62.7	63.5	1	0.6	5S-7008CDLLB
5S-7009CDLLB	45	75	16	1	0.6	30.5	14.6	3 100	1 490	16.7	1 700	10.4	23 300	16.1	0.21	53.0	70.3	50.5	70.3	70.5	1	0.6	5S-7009CDLLB
5S-7010CDLLB	50	80	16	1	0.6	31.5	15.9	3 250	1 620	18.1	1 850	10.6	21 500	16.8	0.23	58.0	75.3	55.5	75.3	75.5	1	0.6	5S-7010CDLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.38				1.47			1.65	2.39
0.357	0.4				1.4			1.57	2.28
0.714	0.43				1.3			1.46	2.11
1.07	0.46				1.23			1.38	2
1.43	0.47	1	0	0.44	1.19	1	1.34	0.72	1.93
2.14	0.5				1.12			1.26	1.82
3.57	0.55				1.02			1.14	1.66
5.35	0.56				1			1.12	1.63
7.14	0.56				1			1.12	1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.46	1	0.92

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.


Back-to-back (DB) Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed standard angular contact ball bearings
(ceramic ball spec.)
5S-70 LLB type

Dimension
Tables

NTN



Contact angle 25° d 10–50 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions		Abutment and fillet dimensions					Part number		
	mm					dynamic	static	dynamic	static	kN					kgf		<i>d</i> ₁	<i>D</i> ₁	<i>d</i> _a min	<i>D</i> _a max	<i>D</i> _b max		<i>r</i> _{as} max	<i>r</i> _{1as} max
						kN		kgf																
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{smin} ⁽¹⁾	<i>r</i> _{1smin} ⁽¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)														
5S-7000ADLLB	10	26	8	0.3	0.15	5.70	1.67	580	170	2.51	256	70 600	8.3	0.014	14.5	23.4	12.5	23.5	24.8	0.3	0.15	5S-7000ADLLB		
5S-7001ADLLB	12	28	8	0.3	0.15	6.20	1.93	630	197	2.92	297	63 500	8.7	0.020	16.5	25.4	14.5	25.5	26.8	0.3	0.15	5S-7001ADLLB		
5S-7002ADLLB	15	32	9	0.3	0.15	6.60	2.25	675	229	3.40	345	54 000	10.0	0.029	19.5	28.8	17.5	29.5	30.8	0.3	0.15	5S-7002ADLLB		
5S-7003ADLLB	17	35	10	0.3	0.15	8.75	3.00	890	305	4.55	465	48 800	11.1	0.035	21.3	32.2	19.5	32.5	33.8	0.3	0.15	5S-7003ADLLB		
5S-7004ADLLB	20	42	12	0.6	0.3	11.1	4.00	1 130	405	6.00	615	41 000	13.3	0.064	26.0	38.0	24.5	38.0	39.5	0.6	0.3	5S-7004ADLLB		
5S-7005ADLLB	25	47	12	0.6	0.3	13.0	5.30	1 320	540	8.00	815	35 300	14.5	0.075	30.4	43.1	29.5	43.1	44.5	0.6	0.3	5S-7005ADLLB		
5S-7006ADLLB	30	55	13	1	0.6	16.0	6.80	1 630	690	10.2	1 040	29 900	16.5	0.096	36.4	50.4	35.5	50.4	50.5	1	0.6	5S-7006ADLLB		
5S-7007ADLLB	35	62	14	1	0.6	20.1	9.00	2 050	920	13.6	1 390	26 200	18.4	0.14	41.9	57.2	40.5	57.2	57.5	1	0.6	5S-7007ADLLB		
5S-7008ADLLB	40	68	15	1	0.6	21.6	10.5	2 200	1 070	15.8	1 620	23 500	20.2	0.17	47.9	62.7	45.5	62.7	63.5	1	0.6	5S-7008ADLLB		
5S-7009ADLLB	45	75	16	1	0.6	29.1	14.0	2 970	1 420	21.1	2 150	20 300	22.1	0.21	53.0	70.3	50.5	70.3	70.5	1	0.6	5S-7009ADLLB		
5S-7010ADLLB	50	80	16	1	0.6	30.0	15.1	3 050	1 540	22.8	2 330	18 800	23.3	0.23	58.0	75.3	55.5	75.3	75.5	1	0.6	5S-7010ADLLB		

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

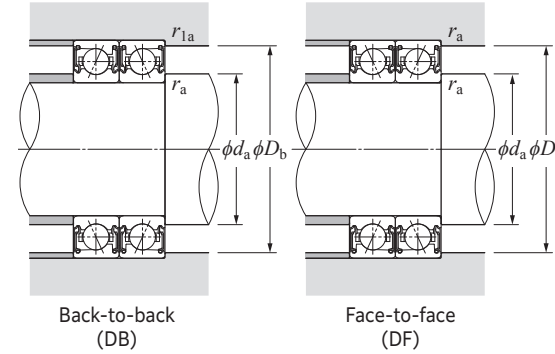

Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load


$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings (steel ball spec.)
2LA-BNS9 LLB type



Contact angle 15° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed	Load center	Mass	Reference dimensions			Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static										kN	kgf	mm	mm	mm	
						kN	kgf	mm	mm	mm	mm					mm	mm	mm	mm	mm	mm	mm		
	d	D	B	$r_s \text{ min}^{-1}$	$r_{ls} \text{ min}^{-1}$	C_r	C_{0r}	C_r	C_{0r}	(static)	f_0					grease lubrication	a	kg Single-row (approx.)	d_1	d_2	D_1	d_a min	d_b min	
2LA-BNS910CLLB	50	72	12	0.6	0.3	8.95	7.30	915	745	10.7	1 090	11.1	21 800	14.2	0.14	56.9	56.0	65.0	54.5	52.5	67.5	0.6	0.3	2LA-BNS910CLLB
2LA-BNS911CLLB	55	80	13	1	0.6	11.4	9.20	1 170	940	13.5	1 380	11.0	19 700	15.6	0.19	62.6	61.7	72.1	60.5	59.5	74.5	1	0.6	2LA-BNS911CLLB
2LA-BNS912CLLB	60	85	13	1	0.6	11.8	9.95	1 200	1 010	14.6	1 490	11.1	18 300	16.3	0.21	67.6	66.7	77.1	65.5	64.5	79.5	1	0.6	2LA-BNS912CLLB
2LA-BNS913CLLB	65	90	13	1	0.6	12.1	10.7	1 230	1 090	15.7	1 600	11.2	17 200	16.9	0.22	72.6	71.7	82.1	70.5	69.5	84.5	1	0.6	2LA-BNS913CLLB
2LA-BNS914CLLB	70	100	16	1	0.6	15.2	13.5	1 550	1 370	19.8	2 020	11.1	15 600	19.5	0.38	79.2	78.3	90.2	75.5	74.5	94.5	1	0.6	2LA-BNS914CLLB
2LA-BNS915CLLB	75	105	16	1	0.6	15.6	14.4	1 590	1 470	21.2	2 170	11.2	14 800	20.1	0.39	84.2	83.3	95.2	80.5	79.5	99.5	1	0.6	2LA-BNS915CLLB
2LA-BNS916CLLB	80	110	16	1	0.6	16.0	15.4	1 630	1 570	22.6	2 310	11.3	14 000	20.8	0.41	89.2	88.3	100.2	85.5	84.5	104.5	1	0.6	2LA-BNS916CLLB
2LA-BNS917CLLB	85	120	18	1.1	0.6	19.3	18.3	1 960	1 860	26.9	2 740	11.2	13 000	22.8	0.59	96.0	95.0	108.6	92	89.5	113	1	0.6	2LA-BNS917CLLB
2LA-BNS918CLLB	90	125	18	1.1	0.6	19.8	19.5	2 020	1 980	28.7	2 920	11.3	12 400	23.5	0.62	100.9	100.0	113.6	97	94.5	118	1	0.6	2LA-BNS918CLLB
2LA-BNS919CLLB	95	130	18	1.1	0.6	20.3	20.6	2 070	2 110	30.5	3 100	11.3	11 800	24.2	0.65	105.9	105.0	118.6	102	99.5	123	1	0.6	2LA-BNS919CLLB
2LA-BNS920CLLB	100	140	20	1.1	0.6	28.5	28.0	2 910	2 850	41.0	4 200	11.2	11 100	26.2	0.87	111.9	110.9	127.3	107	104.5	133	1	0.6	2LA-BNS920CLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57			1.76	2.56
0.357	0.36				1.53			1.71	2.48
0.714	0.38				1.46			1.64	2.38
1.07	0.4				1.42			1.59	2.31
1.43	0.41	1	0	0.44	1.38	1	0.72	1.55	2.25
2.14	0.43				1.33			1.49	2.16
3.57	0.44				1.25			1.4	2.03
5.35	0.47				1.18			1.32	1.92
7.14	0.49				1.13			1.26	1.83

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings (steel ball spec.)
2LA-BNS9 LLB type



Contact angle 20° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm			Abutment and fillet dimensions					Part number
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf				mm			<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>r</i> _{as} max	<i>r</i> _{1as} max	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ⁽¹⁾	<i>r</i> _{1s min} ⁽¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}						(static)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁					
2LA-BNS910LLB	50	72	12	0.6	0.3	8.75	7.10	890	725	11.9	1 220	23 100	17.2	0.14	56.9	56.0	65.0	54.5	52.5	67.5	0.6	0.3	2LA-BNS910LLB
2LA-BNS911LLB	55	80	13	1	0.6	11.2	9.00	1 140	915	15.1	1 540	20 800	18.9	0.19	62.6	61.7	72.1	60.5	59.5	74.5	1	0.6	2LA-BNS911LLB
2LA-BNS912LLB	60	85	13	1	0.6	11.5	9.70	1 170	990	16.3	1 660	19 400	19.8	0.21	67.6	66.7	77.1	65.5	64.5	79.5	1	0.6	2LA-BNS912LLB
2LA-BNS913LLB	65	90	13	1	0.6	11.8	10.4	1 200	1 060	17.5	1 790	18 200	20.7	0.22	72.6	71.7	82.1	70.5	69.5	84.5	1	0.6	2LA-BNS913LLB
2LA-BNS914LLB	70	100	16	1	0.6	14.8	13.1	1 510	1 340	22.1	2 250	16 600	23.6	0.38	79.2	78.3	90.2	75.5	74.5	94.5	1	0.6	2LA-BNS914LLB
2LA-BNS915LLB	75	105	16	1	0.6	15.2	14.1	1 550	1 430	23.6	2 410	15 600	24.5	0.39	84.2	83.3	95.2	80.5	79.5	99.5	1	0.6	2LA-BNS915LLB
2LA-BNS916LLB	80	110	16	1	0.6	15.6	15.0	1 590	1 530	25.2	2 570	14 800	25.4	0.41	89.2	88.3	100.2	85.5	84.5	104.5	1	0.6	2LA-BNS916LLB
2LA-BNS917LLB	85	120	18	1.1	0.6	18.8	17.8	1 910	1 820	29.9	3 050	13 700	27.8	0.59	96.0	95.0	108.6	92	89.5	113	1	0.6	2LA-BNS917LLB
2LA-BNS918LLB	90	125	18	1.1	0.6	19.3	19.0	1 960	1 930	32.0	3 250	13 100	28.7	0.62	100.9	100.0	113.6	97	94.5	118	1	0.6	2LA-BNS918LLB
2LA-BNS919LLB	95	130	18	1.1	0.6	19.7	20.1	2 010	2 050	34.0	3 450	12 500	29.6	0.65	105.9	105.0	118.6	102	99.5	123	1	0.6	2LA-BNS919LLB
2LA-BNS920LLB	100	140	20	1.1	0.6	27.8	27.3	2 830	2 780	46.0	4 700	11 700	32.0	0.87	111.9	110.9	127.3	107	104.5	133	1	0.6	2LA-BNS920LLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads


Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

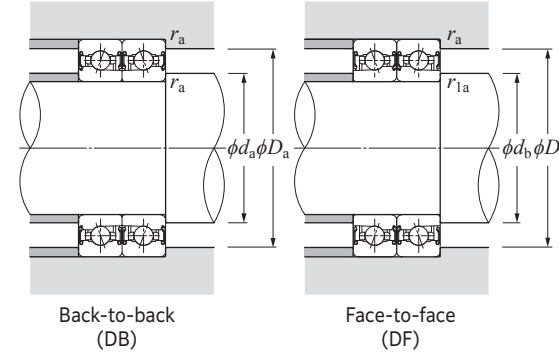


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(steel ball spec.)
2LA-BNS9 LLB type



Contact angle 25° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm			Abutment and fillet dimensions					Part number
	mm					dynamic	static	dynamic	static	kN	kgf				<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>r</i> _{as} max	<i>r</i> _{1as} max				
						kN		kgf															
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{1s min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}											(static)			
2LA-BNS910ADLLB	50	72	12	0.6	0.3	8.45	6.90	860	700	12.4	1 270	20 500	20.3	0.14	56.9	56.0	65.0	54.5	52.5	67.5	0.6	0.3	2LA-BNS910ADLLB
2LA-BNS911ADLLB	55	80	13	1	0.6	10.8	8.70	1 100	885	16.8	1 710	18 500	22.3	0.19	62.6	61.7	72.1	60.5	59.5	74.5	1	0.6	2LA-BNS911ADLLB
2LA-BNS912ADLLB	60	85	13	1	0.6	11.1	9.40	1 130	960	18.1	1 850	17 200	23.5	0.21	67.6	66.7	77.1	65.5	64.5	79.5	1	0.6	2LA-BNS912ADLLB
2LA-BNS913ADLLB	65	90	13	1	0.6	11.4	10.1	1 160	1 030	19.5	1 990	16 100	24.7	0.22	72.6	71.7	82.1	70.5	69.5	84.5	1	0.6	2LA-BNS913ADLLB
2LA-BNS914ADLLB	70	100	16	1	0.6	14.3	12.7	1 460	1 300	24.6	2 500	14 700	27.9	0.38	79.2	78.3	90.2	75.5	74.5	94.5	1	0.6	2LA-BNS914ADLLB
2LA-BNS915ADLLB	75	105	16	1	0.6	14.7	13.6	1 500	1 390	26.3	2 680	13 900	29.1	0.39	84.2	83.3	95.2	80.5	79.5	99.5	1	0.6	2LA-BNS915ADLLB
2LA-BNS916ADLLB	80	110	16	1	0.6	15.1	14.5	1 540	1 480	28.0	2 860	13 200	30.3	0.41	89.2	88.3	100.2	85.5	84.5	104.5	1	0.6	2LA-BNS916ADLLB
2LA-BNS917ADLLB	85	120	18	1.1	0.6	18.1	17.2	1 850	1 760	33.5	3 400	12 200	33.0	0.59	96.0	95.0	108.6	92	89.5	113	1	0.6	2LA-BNS917ADLLB
2LA-BNS918ADLLB	90	125	18	1.1	0.6	18.6	18.4	1 900	1 870	35.5	3 600	11 600	34.2	0.62	100.9	100.0	113.6	97	94.5	118	1	0.6	2LA-BNS918ADLLB
2LA-BNS919ADLLB	95	130	18	1.1	0.6	19.1	19.5	1 940	1 990	37.5	3 850	11 100	35.4	0.65	105.9	105.0	118.6	102	99.5	123	1	0.6	2LA-BNS919ADLLB
2LA-BNS920ADLLB	100	140	20	1.1	0.6	26.8	26.4	2 730	2 690	51.0	5 200	10 400	38.1	0.87	111.9	110.9	127.3	107	104.5	133	1	0.6	2LA-BNS920ADLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

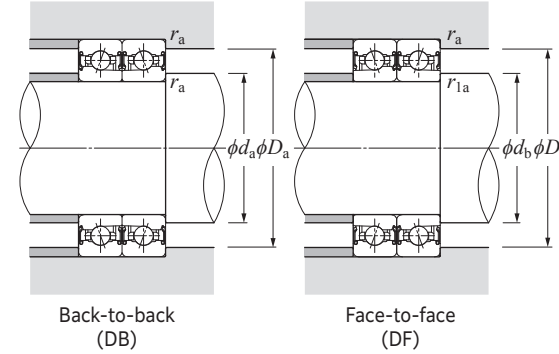


Back-to-back
(DB)

Face-to-face
(DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(steel ball spec.)
2LA-BNS0 LLB type



Contact angle 15° d 45–100 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions			Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf					mm			mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{ls min} ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀					<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>r</i> _{as} max	<i>r</i> _{las} max	
2LA-BNS009CLLB	45	75	16	1	0.6	13.1	9.15	1 340	930	13.4	1 370	10.7	22 200	16.1	0.26	54.1	53.3	65.0	50.5	49.5	69.5	1	0.6	2LA-BNS009CLLB
2LA-BNS010CLLB	50	80	16	1	0.6	16.3	11.5	1 670	1 170	16.8	1 720	10.6	20 500	16.8	0.28	58.4	57.5	70.5	55.5	54.5	74.5	1	0.6	2LA-BNS010CLLB
2LA-BNS011CLLB	55	90	18	1.1	0.6	19.1	13.6	1 950	1 380	19.9	2 030	10.6	18 300	18.8	0.41	65.2	64.1	78.7	62	59.5	83	1	0.6	2LA-BNS011CLLB
2LA-BNS012CLLB	60	95	18	1.1	0.6	20.0	15.0	2 040	1 530	22.0	2 240	10.7	17 200	19.5	0.44	70.1	69.1	83.5	67	64.5	88	1	0.6	2LA-BNS012CLLB
2LA-BNS013CLLB	65	100	18	1.1	0.6	20.3	15.8	2 070	1 610	23.2	2 360	10.8	16 100	20.1	0.47	75.2	74.2	88.2	72	69.5	93	1	0.6	2LA-BNS013CLLB
2LA-BNS014CLLB	70	110	20	1.1	0.6	24.9	19.9	2 540	2 030	29.2	2 980	10.8	14 800	22.2	0.66	81.9	80.8	96.8	77	74.5	103	1	0.6	2LA-BNS014CLLB
2LA-BNS015CLLB	75	115	20	1.1	0.6	26.5	22.4	2 700	2 290	33.0	3 350	10.9	14 000	22.8	0.69	86.8	85.8	102.2	82	79.5	108	1	0.6	2LA-BNS015CLLB
2LA-BNS016CLLB	80	125	22	1.1	0.6	30.5	25.7	3 100	2 620	38.0	3 850	10.9	13 000	24.8	0.94	93.7	92.5	110.2	87	84.5	118	1	0.6	2LA-BNS016CLLB
2LA-BNS017CLLB	85	130	22	1.1	0.6	30.5	26.8	3 150	2 740	39.5	4 000	10.9	12 400	25.5	0.98	98.6	97.5	115.4	92	89.5	123	1	0.6	2LA-BNS017CLLB
2LA-BNS018CLLB	90	140	24	1.5	1	35.5	31.5	3 650	3 200	46.0	4 700	10.9	11 600	27.5	1.29	105.3	104.1	123.2	98.5	95.5	131.5	1.5	1	2LA-BNS018CLLB
2LA-BNS019CLLB	95	145	24	1.5	1	36.0	32.5	3 700	3 350	48.0	4 900	11.0	11 100	28.2	1.34	110.4	109.1	128.1	103.5	100.5	136.5	1.5	1	2LA-BNS019CLLB
2LA-BNS020CLLB	100	150	24	1.5	1	37.5	35.0	3 800	3 600	51.5	5 250	11.0	10 600	28.9	1.40	115.4	114.2	132.7	108.5	105.5	141.5	1.5	1	2LA-BNS020CLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$

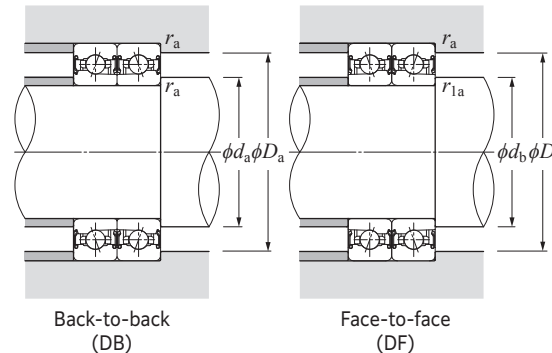

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57		1.76		2.56
0.357	0.36				1.53		1.71		2.48
0.714	0.38				1.46		1.64		2.38
1.07	0.4				1.42		1.59		2.31
1.43	0.41	1	0	0.44	1.38	1	1.55	0.72	2.25
2.14	0.43				1.33		1.49		2.16
3.57	0.44				1.25		1.4		2.03
5.35	0.47				1.18		1.32		1.92
7.14	0.49				1.13		1.26		1.83

Static equivalent radial load


$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings (steel ball spec.)
2LA-BNS0 LLB type



Contact angle 20° d 45–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions			Abutment and fillet dimensions					Part number
	mm					dynamic kN	static	dynamic	static	kN	kgf				mm			<i>d</i> _a	<i>d</i> _b	<i>D</i> _a	<i>r</i> _{as}	<i>r</i> _{las}	
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min¹⁾}	<i>r</i> _{ls min¹⁾}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>d</i> ₁				<i>d</i> ₂	<i>D</i> ₁	min	min	max	max	max		
2LA-BNS009LLB	45	75	16	1	0.6	12.8	8.95	1 300	910	15.0	1 530	23 500	19.0	0.26	54.1	53.3	65.0	50.5	49.5	69.5	1	0.6	2LA-BNS009LLB
2LA-BNS010LLB	50	80	16	1	0.6	15.9	11.2	1 620	1 150	18.8	1 920	21 600	19.9	0.28	58.4	57.5	70.5	55.5	54.5	74.5	1	0.6	2LA-BNS010LLB
2LA-BNS011LLB	55	90	18	1.1	0.6	18.7	13.3	1 900	1 350	22.2	2 260	19 400	22.3	0.41	65.2	64.2	78.7	62	59.5	83	1	0.6	2LA-BNS011LLB
2LA-BNS012LLB	60	95	18	1.1	0.6	19.5	14.7	1 990	1 490	24.6	2 500	18 200	23.2	0.44	70.1	69.2	83.5	67	64.5	88	1	0.6	2LA-BNS012LLB
2LA-BNS013LLB	65	100	18	1.1	0.6	19.8	15.4	2 020	1 570	25.9	2 640	17 100	24.1	0.47	75.2	74.2	88.2	72	69.5	93	1	0.6	2LA-BNS013LLB
2LA-BNS014LLB	70	110	20	1.1	0.6	24.2	19.4	2 470	1 980	32.5	3 300	15 600	26.5	0.66	81.9	80.8	96.8	77	74.5	103	1	0.6	2LA-BNS014LLB
2LA-BNS015LLB	75	115	20	1.1	0.6	25.8	21.9	2 630	2 230	36.5	3 750	14 800	27.4	0.69	86.8	85.8	102.2	82	79.5	108	1	0.6	2LA-BNS015LLB
2LA-BNS016LLB	80	125	22	1.1	0.6	29.6	25.1	3 000	2 560	42.0	4 300	13 700	29.8	0.94	93.7	92.5	110.2	87	84.5	118	1	0.6	2LA-BNS016LLB
2LA-BNS017LLB	85	130	22	1.1	0.6	30.0	26.2	3 050	2 670	44.0	4 500	13 100	30.7	0.98	98.6	97.5	115.4	92	89.5	123	1	0.6	2LA-BNS017LLB
2LA-BNS018LLB	90	140	24	1.5	1	34.5	30.5	3 550	3 150	51.5	5 250	12 200	33.1	1.29	105.3	104.2	123.2	98.5	95.5	131.5	1.5	1	2LA-BNS018LLB
2LA-BNS019LLB	95	145	24	1.5	1	35.0	32.0	3 600	3 250	53.5	5 450	11 700	34.0	1.34	110.4	109.2	128.1	103.5	100.5	136.5	1.5	1	2LA-BNS019LLB
2LA-BNS020LLB	100	150	24	1.5	1	36.5	34.5	3 700	3 500	57.5	5 850	11 300	34.9	1.40	115.4	114.2	132.7	108.5	105.5	141.5	1.5	1	2LA-BNS020LLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.42		1		0.84	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

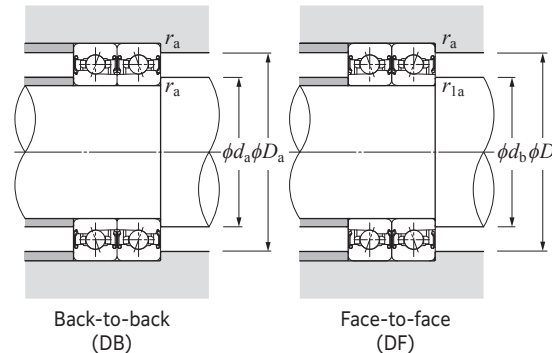


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(steel ball spec.)
2LA-BNS0 LLB type



Contact angle 25° d 45–100 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions			Abutment and fillet dimensions					Part number
	mm						dynamic kN	static kN	dynamic kgf	static kgf	mm					<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a mm max	<i>r</i> _{as} max	<i>r</i> _{1as} max				
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁽¹⁾}	<i>r</i> _{1s min⁽¹⁾}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>d</i> ₁	<i>d</i> ₂				<i>D</i> ₁								
2LA-BNS009ADLLB	45	75	16	1	0.6	12.4	8.65	1 260	885	16.7	1 700	20 800	22.1	0.26	54.1	53.3	65.0	50.5	49.5	69.5	1	0.6	2LA-BNS009ADLLB	
2LA-BNS010ADLLB	50	80	16	1	0.6	15.4	10.9	1 570	1 110	21.0	2 140	19 200	23.3	0.28	58.4	57.6	70.5	55.5	54.5	74.5	1	0.6	2LA-BNS010ADLLB	
2LA-BNS011ADLLB	55	90	18	1.1	0.6	18.1	12.9	1 840	1 310	24.8	2 530	17 200	26.0	0.41	65.2	64.2	78.7	62	59.5	83	1	0.6	2LA-BNS011ADLLB	
2LA-BNS012ADLLB	60	95	18	1.1	0.6	18.9	14.2	1 930	1 450	27.4	2 800	16 100	27.2	0.44	70.1	69.2	83.5	67	64.5	88	1	0.6	2LA-BNS012ADLLB	
2LA-BNS013ADLLB	65	100	18	1.1	0.6	19.2	14.9	1 960	1 520	28.9	2 940	15 200	28.4	0.47	75.2	74.2	88.2	72	69.5	93	1	0.6	2LA-BNS013ADLLB	
2LA-BNS014ADLLB	70	110	20	1.1	0.6	23.4	18.8	2 390	1 920	36.5	3 700	13 900	31.1	0.66	81.9	80.8	96.8	77	74.5	103	1	0.6	2LA-BNS014ADLLB	
2LA-BNS015ADLLB	75	115	20	1.1	0.6	25.0	21.2	2 550	2 160	41.0	4 200	13 200	32.3	0.69	86.8	85.9	102.2	82	79.5	108	1	0.6	2LA-BNS015ADLLB	
2LA-BNS016ADLLB	80	125	22	1.1	0.6	28.6	24.3	2 910	2 480	47.0	4 800	12 200	35.1	0.94	93.7	92.6	110.2	87	84.5	118	1	0.6	2LA-BNS016ADLLB	
2LA-BNS017ADLLB	85	130	22	1.1	0.6	29.0	25.4	2 950	2 590	49.0	5 000	11 600	36.2	0.98	98.6	97.6	115.4	92	89.5	123	1	0.6	2LA-BNS017ADLLB	
2LA-BNS018ADLLB	90	140	24	1.5	1	33.5	29.7	3 400	3 050	57.5	5 850	10 900	39.0	1.29	105.3	104.2	123.2	98.5	95.5	131.5	1.5	1	2LA-BNS018ADLLB	
2LA-BNS019ADLLB	95	145	24	1.5	1	34.0	31.0	3 450	3 150	60.0	6 100	10 400	40.2	1.34	110.4	109.2	128.1	103.5	100.5	136.5	1.5	1	2LA-BNS019ADLLB	
2LA-BNS020ADLLB	100	150	24	1.5	1	35.0	33.0	3 600	3 400	64.0	6 550	10 000	41.3	1.40	115.4	114.2	132.7	108.5	105.5	141.5	1.5	1	2LA-BNS020ADLLB	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.38		1		0.76	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

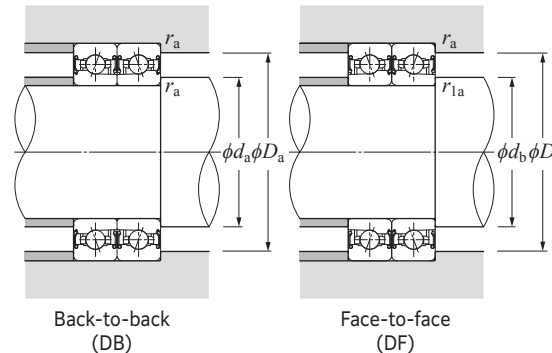


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-BNS9 LLB type



Contact angle 15° d 50–100 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Factor	Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm			Abutment and fillet dimensions					Part number
	mm						dynamic kN	static	dynamic kgf	static	kN	kgf					mm								
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min¹}	<i>r</i> _{ls min¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀	<i>d</i> _{a min}					<i>d</i> _{b min}	<i>D</i> _{a max}	<i>r</i> _{as max}	<i>r</i> _{las max}					
5S-2LA-BNS910CLLB	50	72	12	0.6	0.3	8.95	5.05	915	515	6.80	690	7.7	25 600	14.2	0.14	56.9	56.0	65.0	54.5	52.5	67.5	0.6	0.3	5S-2LA-BNS910CLLB	
5S-2LA-BNS911CLLB	55	80	13	1	0.6	11.4	6.40	1 170	650	8.55	870	7.6	23 100	15.6	0.18	62.6	61.7	72.1	60.5	59.5	74.5	1	0.6	5S-2LA-BNS911CLLB	
5S-2LA-BNS912CLLB	60	85	13	1	0.6	11.8	6.90	1 200	705	9.25	945	7.7	21 500	16.3	0.20	67.6	66.7	77.1	65.5	64.5	79.5	1	0.6	5S-2LA-BNS912CLLB	
5S-2LA-BNS913CLLB	65	90	13	1	0.6	12.1	7.40	1 230	755	9.95	1 010	7.8	20 100	16.9	0.21	72.6	71.7	82.1	70.5	69.5	84.5	1	0.6	5S-2LA-BNS913CLLB	
5S-2LA-BNS914CLLB	70	100	16	1	0.6	15.2	9.35	1 550	950	12.5	1 280	7.7	18 300	19.5	0.36	79.2	78.3	90.2	75.5	74.5	94.5	1	0.6	5S-2LA-BNS914CLLB	
5S-2LA-BNS915CLLB	75	105	16	1	0.6	15.6	10.0	1 590	1 020	13.4	1 370	7.8	17 300	20.1	0.37	84.2	83.3	95.2	80.5	79.5	99.5	1	0.6	5S-2LA-BNS915CLLB	
5S-2LA-BNS916CLLB	80	110	16	1	0.6	16.0	10.6	1 630	1 090	14.3	1 460	7.8	16 400	20.8	0.39	89.2	88.3	100.2	85.5	84.5	104.5	1	0.6	5S-2LA-BNS916CLLB	
5S-2LA-BNS917CLLB	85	120	18	1.1	0.6	19.3	12.7	1 960	1 290	17.0	1 730	7.8	15 200	22.8	0.57	96.0	95.0	108.6	92	89.5	113	1	0.6	5S-2LA-BNS917CLLB	
5S-2LA-BNS918CLLB	90	125	18	1.1	0.6	19.8	13.5	2 020	1 370	18.1	1 850	7.8	14 500	23.5	0.59	100.9	100.0	113.6	97	94.5	118	1	0.6	5S-2LA-BNS918CLLB	
5S-2LA-BNS919CLLB	95	130	18	1.1	0.6	20.3	14.3	2 070	1 460	19.2	1 960	7.8	13 900	24.2	0.62	105.9	105.0	118.6	102	99.5	123	1	0.6	5S-2LA-BNS919CLLB	
5S-2LA-BNS920CLLB	100	140	20	1.1	0.6	28.5	19.4	2 910	1 980	26.0	2 650	7.7	13 000	26.2	0.82	111.9	110.9	127.3	107	104.5	133	1	0.6	5S-2LA-BNS920CLLB	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57			1.76	2.56
0.357	0.36				1.53			1.71	2.48
0.714	0.38				1.46			1.64	2.38
1.07	0.4				1.42			1.59	2.31
1.43	0.41	1	0	0.44	1.38	1	0.72	1.55	2.25
2.14	0.43				1.33			1.49	2.16
3.57	0.44				1.25			1.4	2.03
5.35	0.47				1.18			1.32	1.92
7.14	0.49				1.13			1.26	1.83

Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-BNS9 LLB type



Contact angle 20° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm			Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static									<i>d_a</i>	<i>d_b</i>	<i>D_a</i>	<i>r_{as}</i>	<i>r_{1as}</i>	
	mm					kN		kgf	kN	kgf	mm				min	max	max	max					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹⁾	<i>r_{1s}</i> min ⁻¹⁾	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)					<i>d₁</i>	<i>d₂</i>	<i>D₁</i>	min	min	max	max	max	
5S-2LA-BNS910LLB	50	72	12	0.6	0.3	8.75	4.95	890	505	7.75	790	28 200	17.2	0.14	56.9	56.0	65.0	54.5	52.5	67.5	0.6	0.3	5S-2LA-BNS910LLB
5S-2LA-BNS911LLB	55	80	13	1	0.6	11.2	6.25	1 140	635	9.75	995	25 500	18.9	0.18	62.6	61.7	72.1	60.5	59.5	74.5	1	0.6	5S-2LA-BNS911LLB
5S-2LA-BNS912LLB	60	85	13	1	0.6	11.5	6.70	1 170	685	10.5	1 080	23 700	19.8	0.20	67.6	66.7	77.1	65.5	64.5	79.5	1	0.6	5S-2LA-BNS912LLB
5S-2LA-BNS913LLB	65	90	13	1	0.6	11.8	7.20	1 200	735	11.3	1 160	22 200	20.7	0.21	72.6	71.7	82.1	70.5	69.5	84.5	1	0.6	5S-2LA-BNS913LLB
5S-2LA-BNS914LLB	70	100	16	1	0.6	14.8	9.10	1 510	930	14.3	1 460	20 200	23.6	0.36	79.2	78.3	90.2	75.5	74.5	94.5	1	0.6	5S-2LA-BNS914LLB
5S-2LA-BNS915LLB	75	105	16	1	0.6	15.2	9.75	1 550	995	15.3	1 560	19 100	24.5	0.37	84.2	83.3	95.2	80.5	79.5	99.5	1	0.6	5S-2LA-BNS915LLB
5S-2LA-BNS916LLB	80	110	16	1	0.6	15.6	10.4	1 590	1 060	16.3	1 660	18 100	25.4	0.39	89.2	88.3	100.2	85.5	84.5	104.5	1	0.6	5S-2LA-BNS916LLB
5S-2LA-BNS917LLB	85	120	18	1.1	0.6	18.8	12.3	1 910	1 260	19.4	1 980	16 800	27.8	0.57	96.0	95.0	108.6	92	89.5	113	1	0.6	5S-2LA-BNS917LLB
5S-2LA-BNS918LLB	90	125	18	1.1	0.6	19.3	13.1	1 960	1 340	20.6	2 100	16 000	28.7	0.59	100.9	100.0	113.6	97	94.5	118	1	0.6	5S-2LA-BNS918LLB
5S-2LA-BNS919LLB	95	130	18	1.1	0.6	19.7	14.0	2 010	1 420	21.9	2 230	15 300	29.6	0.62	105.9	105.0	118.6	102	99.5	123	1	0.6	5S-2LA-BNS919LLB
5S-2LA-BNS920LLB	100	140	20	1.1	0.6	27.8	18.9	2 830	1 930	29.7	3 050	14 300	32.0	0.82	111.9	110.9	127.3	107	104.5	133	1	0.6	5S-2LA-BNS920LLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face			
X_0		Y_0		X_0		Y_0	
0.5		0.42		1		0.84	

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

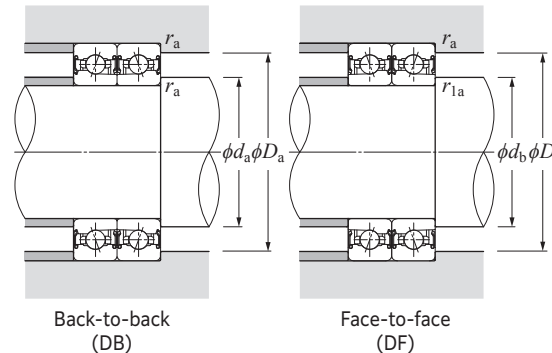


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-BNS9 LLB type



Contact angle 25° d 50–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹	Load center mm	Mass kg	Reference dimensions			Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static														
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf												
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _s min ⁻¹	<i>r</i> _{1s} min ⁻¹	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	grease lubrication				<i>a</i>	kg Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	
5S-2LA-BNS910ADLLB	50	72	12	0.6	0.3	8.45	4.75	860	485	8.80	895	25 600	20.3	0.14	56.9	56.0	65.0	54.5	52.5	67.5	0.6	0.3	5S-2LA-BNS910ADLLB
5S-2LA-BNS911ADLLB	55	80	13	1	0.6	10.8	6.05	1 100	615	11.1	1 130	23 200	22.3	0.18	62.6	61.7	72.1	60.5	59.5	74.5	1	0.6	5S-2LA-BNS911ADLLB
5S-2LA-BNS912ADLLB	60	85	13	1	0.6	11.1	6.50	1 130	665	12.0	1 220	21 600	23.5	0.20	67.6	66.7	77.1	65.5	64.5	79.5	1	0.6	5S-2LA-BNS912ADLLB
5S-2LA-BNS913ADLLB	65	90	13	1	0.6	11.4	7.00	1 160	715	12.9	1 310	20 200	24.7	0.21	72.6	71.7	82.1	70.5	69.5	84.5	1	0.6	5S-2LA-BNS913ADLLB
5S-2LA-BNS914ADLLB	70	100	16	1	0.6	14.3	8.80	1 460	900	16.2	1 650	18 400	27.9	0.36	79.2	78.3	90.2	75.5	74.5	94.5	1	0.6	5S-2LA-BNS914ADLLB
5S-2LA-BNS915ADLLB	75	105	16	1	0.6	14.7	9.45	1 500	960	17.3	1 770	17 400	29.1	0.37	84.2	83.3	95.2	80.5	79.5	99.5	1	0.6	5S-2LA-BNS915ADLLB
5S-2LA-BNS916ADLLB	80	110	16	1	0.6	15.1	10.0	1 540	1 020	18.5	1 890	16 500	30.3	0.39	89.2	88.3	100.2	85.5	84.5	104.5	1	0.6	5S-2LA-BNS916ADLLB
5S-2LA-BNS917ADLLB	85	120	18	1.1	0.6	18.1	11.9	1 850	1 220	22.0	2 240	15 300	33.0	0.57	96.0	95.0	108.6	92	89.5	113	1	0.6	5S-2LA-BNS917ADLLB
5S-2LA-BNS918ADLLB	90	125	18	1.1	0.6	18.6	12.7	1 900	1 300	23.4	2 390	14 500	34.2	0.59	100.9	100.0	113.6	97	94.5	118	1	0.6	5S-2LA-BNS918ADLLB
5S-2LA-BNS919ADLLB	95	130	18	1.1	0.6	19.1	13.5	1 940	1 380	24.8	2 530	13 900	35.4	0.62	105.9	105.0	118.6	102	99.5	123	1	0.6	5S-2LA-BNS919ADLLB
5S-2LA-BNS920ADLLB	100	140	20	1.1	0.6	26.8	18.3	2 730	1 870	33.5	3 450	13 000	38.1	0.82	111.9	110.9	127.3	107	104.5	133	1	0.6	5S-2LA-BNS920ADLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.38		1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

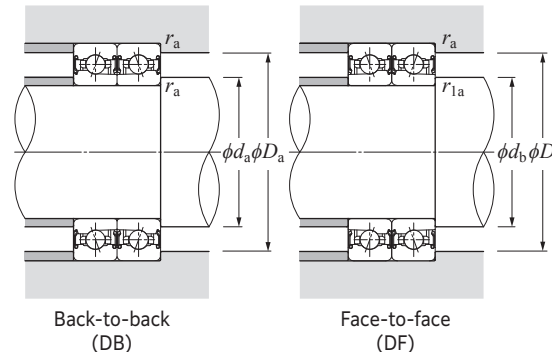


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-BNS0 LLB type




Contact angle 15° d 45–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed	Load center	Mass	Reference dimensions			Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static															
	mm					kN	kgf	min ⁻¹	mm	kg	mm					mm								
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{ls min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀					grease lubrication	<i>a</i>	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _a min	<i>d</i> _b min	
5S-2LA-BNS009CLLB	45	75	16	1	0.6	13.1	6.35	1 340	645	8.45	860	7.4	26 000	16.1	0.25	54.1	53.3	65.0	50.5	49.5	69.5	1	0.6	5S-2LA-BNS009CLLB
5S-2LA-BNS010CLLB	50	80	16	1	0.6	16.3	7.95	1 670	815	10.6	1 080	7.4	24 000	16.8	0.26	58.4	57.5	70.5	55.5	54.5	74.5	1	0.6	5S-2LA-BNS010CLLB
5S-2LA-BNS011CLLB	55	90	18	1.1	0.6	19.1	9.40	1 950	960	12.5	1 280	7.4	21 500	18.8	0.38	65.2	64.1	78.7	62	59.5	83	1	0.6	5S-2LA-BNS011CLLB
5S-2LA-BNS012CLLB	60	95	18	1.1	0.6	20.0	10.4	2 040	1 060	13.9	1 420	7.4	20 100	19.5	0.41	70.1	69.1	83.5	67	64.5	88	1	0.6	5S-2LA-BNS012CLLB
5S-2LA-BNS013CLLB	65	100	18	1.1	0.6	20.3	10.9	2 070	1 120	14.6	1 490	7.5	18 900	20.1	0.44	75.2	74.2	88.2	72	69.5	93	1	0.6	5S-2LA-BNS013CLLB
5S-2LA-BNS014CLLB	70	110	20	1.1	0.6	24.9	13.8	2 540	1 410	18.4	1 880	7.5	17 300	22.2	0.62	81.9	80.8	96.8	77	74.5	103	1	0.6	5S-2LA-BNS014CLLB
5S-2LA-BNS015CLLB	75	115	20	1.1	0.6	26.5	15.5	2 700	1 590	20.8	2 120	7.5	16 400	22.8	0.65	86.8	85.8	102.2	82	79.5	108	1	0.6	5S-2LA-BNS015CLLB
5S-2LA-BNS016CLLB	80	125	22	1.1	0.6	30.5	17.8	3 100	1 820	23.8	2 430	7.5	15 200	24.8	0.88	93.7	92.5	110.2	87	84.5	118	1	0.6	5S-2LA-BNS016CLLB
5S-2LA-BNS017CLLB	85	130	22	1.1	0.6	30.5	18.6	3 150	1 900	24.9	2 540	7.6	14 500	25.5	0.93	98.6	97.5	115.4	92	89.5	123	1	0.6	5S-2LA-BNS017CLLB
5S-2LA-BNS018CLLB	90	140	24	1.5	1	35.5	21.8	3 650	2 220	29.2	2 970	7.6	13 600	27.5	1.22	105.3	104.1	123.2	98.5	95.5	131.5	1.5	1	5S-2LA-BNS018CLLB
5S-2LA-BNS019CLLB	95	145	24	1.5	1	36.0	22.7	3 700	2 310	30.5	3 100	7.6	13 000	28.2	1.27	110.4	109.1	128.1	103.5	100.5	136.5	1.5	1	5S-2LA-BNS019CLLB
5S-2LA-BNS020CLLB	100	150	24	1.5	1	37.5	24.4	3 800	2 480	32.5	3 350	7.6	12 500	28.9	1.32	115.4	114.2	132.7	108.5	105.5	141.5	1.5	1	5S-2LA-BNS020CLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

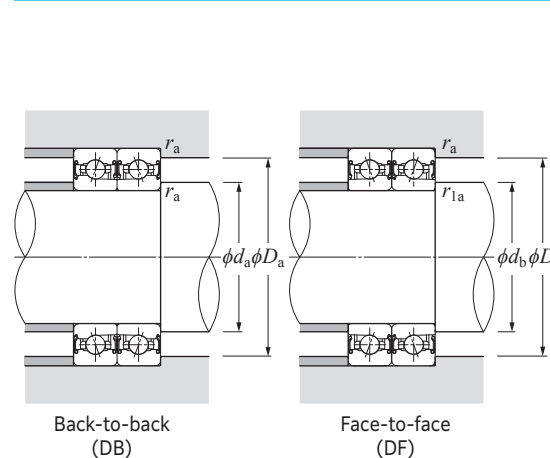

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57		1.76		2.56
0.357	0.36				1.53		1.71		2.48
0.714	0.38				1.46		1.64		2.38
1.07	0.4				1.42		1.59		2.31
1.43	0.41	1	0	0.44	1.38	1	1.55	0.72	2.25
2.14	0.43				1.33		1.49		2.16
3.57	0.44				1.25		1.4		2.03
5.35	0.47				1.18		1.32		1.92
7.14	0.49				1.13		1.26		1.83


Static equivalent radial load
 $P_{0r} = X_0 F_r + Y_0 F_a$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-BNS0 LLB type



Contact angle 20° d 45–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm			Abutment and fillet dimensions					Part number
	mm					dynamic kN	static kN	dynamic kgf	static kgf	(static)					mm								
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{1s min⁻¹}	<i>C</i> _T	<i>C</i> _{0r}	<i>C</i> _T	<i>C</i> _{0r}						<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _{a min}	<i>d</i> _{b min}	<i>D</i> _{a max}	<i>r</i> _{as max}	<i>r</i> _{1as max}	
5S-2LA-BNS009LLB	45	75	16	1	0.6	12.8	6.20	1 300	630	9.70	985	28 700	19.0	0.25	54.1	53.3	65.0	50.5	49.5	69.5	1	0.6	5S-2LA-BNS009LLB
5S-2LA-BNS010LLB	50	80	16	1	0.6	15.9	7.80	1 620	795	12.2	1 240	26 500	19.9	0.26	58.4	57.5	70.5	55.5	54.5	74.5	1	0.6	5S-2LA-BNS010LLB
5S-2LA-BNS011LLB	55	90	18	1.1	0.6	18.7	9.20	1 900	935	14.4	1 460	23 700	22.3	0.38	65.2	64.2	78.7	62	59.5	83	1	0.6	5S-2LA-BNS011LLB
5S-2LA-BNS012LLB	60	95	18	1.1	0.6	19.5	10.2	1 990	1 040	15.9	1 620	22 200	23.2	0.41	70.1	69.2	83.5	67	64.5	88	1	0.6	5S-2LA-BNS012LLB
5S-2LA-BNS013LLB	65	100	18	1.1	0.6	19.8	10.7	2 020	1 090	16.7	1 710	20 800	24.1	0.44	75.2	74.2	88.2	72	69.5	93	1	0.6	5S-2LA-BNS013LLB
5S-2LA-BNS014LLB	70	110	20	1.1	0.6	24.2	13.5	2 470	1 370	21.1	2 150	19 100	26.5	0.62	81.9	80.8	96.8	77	74.5	103	1	0.6	5S-2LA-BNS014LLB
5S-2LA-BNS015LLB	75	115	20	1.1	0.6	25.8	15.2	2 630	1 550	23.8	2 420	18 100	27.4	0.65	86.8	85.8	102.2	82	79.5	108	1	0.6	5S-2LA-BNS015LLB
5S-2LA-BNS016LLB	80	125	22	1.1	0.6	29.6	17.4	3 000	1 770	27.2	2 780	16 800	29.8	0.88	93.7	92.5	110.2	87	84.5	118	1	0.6	5S-2LA-BNS016LLB
5S-2LA-BNS017LLB	85	130	22	1.1	0.6	30.0	18.1	3 050	1 850	28.4	2 900	16 000	30.7	0.93	98.6	97.5	115.4	92	89.5	123	1	0.6	5S-2LA-BNS017LLB
5S-2LA-BNS018LLB	90	140	24	1.5	1	34.5	21.3	3 550	2 170	33.5	3 400	15 000	33.1	1.22	105.3	104.2	123.2	98.5	95.5	131.5	1.5	1	5S-2LA-BNS018LLB
5S-2LA-BNS019LLB	95	145	24	1.5	1	35.0	22.1	3 600	2 260	34.5	3 550	14 300	34.0	1.27	110.4	109.2	128.1	103.5	100.5	136.5	1.5	1	5S-2LA-BNS019LLB
5S-2LA-BNS020LLB	100	150	24	1.5	1	36.5	23.8	3 700	2 420	37.5	3 800	13 800	34.9	1.32	115.4	114.2	132.7	108.5	105.5	141.5	1.5	1	5S-2LA-BNS020LLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.57	1	0	0.43	1	1	1.09	0.7	1.63

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.5	0.42	1	0.84

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

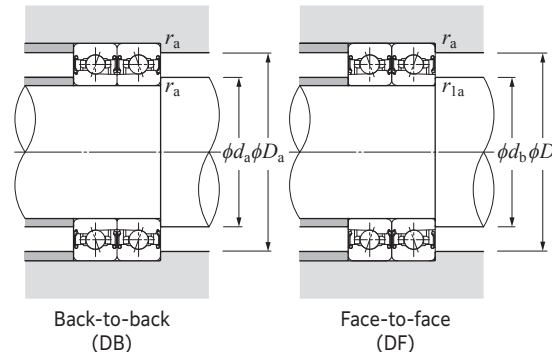


Back-to-back (DB)

Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

ULTAGE Grease-lubricated sealed high speed angular contact ball bearings
(ceramic ball spec.)
5S-2LA-BNS0 LLB type



Contact angle 25° d 45–100 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Load center mm <i>a</i>	Mass kg Single-row (approx.)	Reference dimensions mm			Abutment and fillet dimensions					Part number
						dynamic	static	dynamic	static									mm					
	mm					kN	kN	kgf	kgf	kN	kgf				<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>r</i> _{as} max	<i>r</i> _{1as} max				
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min¹⁾}	<i>r</i> _{1s min¹⁾}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)						<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁					
5S-2LA-BNS009ADLLB	45	75	16	1	0.6	12.4	6.00	1 260	610	11.0	1 120	26 100	22.1	0.25	54.1	53.3	65.0	50.5	49.5	69.5	1	0.6	5S-2LA-BNS009ADLLB
5S-2LA-BNS010ADLLB	50	80	16	1	0.6	15.4	7.55	1 570	770	13.9	1 410	24 100	23.3	0.26	58.4	57.6	70.5	55.5	54.5	74.5	1	0.6	5S-2LA-BNS010ADLLB
5S-2LA-BNS011ADLLB	55	90	18	1.1	0.6	18.1	8.90	1 840	910	16.4	1 670	21 600	26.0	0.38	65.2	64.2	78.7	62	59.5	83	1	0.6	5S-2LA-BNS011ADLLB
5S-2LA-BNS012ADLLB	60	95	18	1.1	0.6	18.9	9.85	1 930	1 000	18.1	1 840	20 200	27.2	0.41	70.1	69.2	83.5	67	64.5	88	1	0.6	5S-2LA-BNS012ADLLB
5S-2LA-BNS013ADLLB	65	100	18	1.1	0.6	19.2	10.4	1 960	1 060	19.0	1 940	19 000	28.4	0.44	75.2	74.2	88.2	72	69.5	93	1	0.6	5S-2LA-BNS013ADLLB
5S-2LA-BNS014ADLLB	70	110	20	1.1	0.6	23.4	13.0	2 390	1 330	24.0	2 440	17 400	31.1	0.62	81.9	80.8	96.8	77	74.5	103	1	0.6	5S-2LA-BNS014ADLLB
5S-2LA-BNS015ADLLB	75	115	20	1.1	0.6	25.0	14.7	2 550	1 500	27.0	2 760	16 500	32.3	0.65	86.8	85.9	102.2	82	79.5	108	1	0.6	5S-2LA-BNS015ADLLB
5S-2LA-BNS016ADLLB	80	125	22	1.1	0.6	28.6	16.9	2 910	1 720	31.0	3 150	15 300	35.1	0.88	93.7	92.6	110.2	87	84.5	118	1	0.6	5S-2LA-BNS016ADLLB
5S-2LA-BNS017ADLLB	85	130	22	1.1	0.6	29.0	17.6	2 950	1 790	32.5	3 300	14 500	36.2	0.93	98.6	97.6	115.4	92	89.5	123	1	0.6	5S-2LA-BNS017ADLLB
5S-2LA-BNS018ADLLB	90	140	24	1.5	1	33.5	20.6	3 400	2 100	38.0	3 850	13 600	39.0	1.22	105.3	104.2	123.2	98.5	95.5	131.5	1.5	1	5S-2LA-BNS018ADLLB
5S-2LA-BNS019ADLLB	95	145	24	1.5	1	34.0	21.4	3 450	2 190	39.5	4 000	13 000	40.2	1.27	110.4	109.2	128.1	103.5	100.5	136.5	1.5	1	5S-2LA-BNS019ADLLB
5S-2LA-BNS020ADLLB	100	150	24	1.5	1	35.0	23.0	3 600	2 350	42.5	4 300	12 500	41.3	1.32	115.4	114.2	132.7	108.5	105.5	141.5	1.5	1	5S-2LA-BNS020ADLLB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


e	Single row / Tandem				Back-to-back / Face-to-face			
	$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
	X	Y	X	Y	X	Y	X	Y
0.68	1	0	0.41	0.87	1	0.92	0.67	1.41

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem				Back-to-back / Face-to-face	
X_0		Y_0		X_0	Y_0
0.5		0.38		1	0.76

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

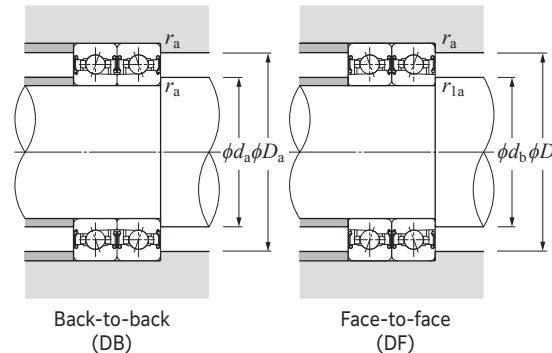

Back-to-back (DB)


Face-to-face (DF)

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Angular contact ball bearings for grinding machines / motors
(steel ball spec.)
BNT9 type



Contact angle 15° d 10–65 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions			Abutment and fillet dimensions					Part number	
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf		grease lubrication	oil lubrication				Single-row cm ³ (approx.)	Single-row kg (approx.)	mm	mm	mm	mm	mm	mm		mm
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s min¹⁾</i>	<i>r_{1s} min¹⁾</i>																						
						<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	<i>f₀</i>							<i>d₁</i>	<i>d₂</i>	<i>D₁</i>	<i>d_a min</i>	<i>d_b min</i>	<i>D_a max</i>	<i>r_{as} max</i>	<i>r_{1as} max</i>		
BNT900	10	22	6	0.3	0.15	2.55	0.995	260	101	1.43	146	9.3	62 200	125 600	5.2	0.3	0.010	14.0	12.7	18.0	12.2	11.2	20	0.3	0.15	BNT900	
BNT901	12	24	6	0.3	0.15	2.70	1.12	275	114	1.76	180	9.6	55 300	111 700	5.4	0.4	0.011	16.0	14.7	20.0	14.2	13.2	22	0.3	0.15	BNT901	
BNT902	15	28	7	0.3	0.15	4.10	1.75	415	179	2.54	259	9.5	46 300	93 500	6.4	0.6	0.016	19.0	17.4	24.0	17.2	16.2	26	0.3	0.15	BNT902	
BNT903	17	30	7	0.3	0.15	4.30	1.95	440	199	2.82	288	9.7	42 300	85 500	6.7	0.8	0.017	21.0	19.4	26.0	19.2	18.2	28	0.3	0.15	BNT903	
BNT904	20	37	9	0.3	0.15	6.20	2.99	630	305	4.35	440	9.7	34 900	70 500	8.4	1.4	0.037	25.5	23.5	31.4	22.5	21.5	34.5	0.3	0.15	BNT904	
BNT905	25	42	9	0.3	0.15	6.65	3.55	675	360	5.15	525	10.1	29 700	60 000	9.0	1.7	0.043	30.5	28.5	36.5	27.5	26.5	39.5	0.3	0.15	BNT905	
BNT906	30	47	9	0.3	0.15	7.05	4.10	715	420	6.00	610	10.4	25 800	52 200	9.7	1.9	0.049	35.5	33.5	41.5	32.5	31.5	44.5	0.3	0.15	BNT906	
BNT907	35	55	10	0.6	0.3	11.1	6.30	1 140	645	9.20	940	10.1	21 000	42 400	11.1	2.8	0.073	41.2	38.5	48.8	39.5	37.5	50.5	0.6	0.3	BNT907	
BNT908	40	62	12	0.6	0.3	11.8	7.30	1 210	740	10.6	1 080	10.4	18 500	37 500	12.9	4.5	0.11	47.0	44.4	55.0	44.5	42.5	57.5	0.6	0.3	BNT908	
BNT909	45	68	12	0.6	0.3	14.7	9.20	1 490	935	13.4	1 370	10.4	16 700	33 800	13.6	5.2	0.13	52.1	49.1	60.9	49.5	48	63.5	0.6	0.3	BNT909	
BNT910	50	72	12	0.6	0.3	15.5	10.3	1 580	1 060	15.1	1 540	10.5	15 500	31 300	14.2	6.2	0.13	56.6	53.6	65.4	54.5	52.5	67.5	0.6	0.3	BNT910	
BNT911	55	80	13	1	0.6	16.2	11.6	1 650	1 180	17.0	1 730	10.7	13 800	27 600	15.6	7.8	0.18	63.2	60.1	71.8	60.5	59.5	74.5	1	0.6	BNT911	
BNT912	60	85	13	1	0.6	16.9	12.8	1 730	1 300	18.7	1 910	10.8	12 800	25 700	16.3	8.3	0.20	68.1	65.1	76.9	65.5	64.5	79.5	1	0.6	BNT912	
BNT913	65	90	13	1	0.6	17.1	13.4	1 750	1 370	19.7	2 010	10.9	12 000	24 000	17.0	8.9	0.21	73.1	70.1	81.9	70.5	69.5	84.5	1	0.6	BNT913	

1) Minimum allowable value for corner radius dimension r or r_1 .


Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$

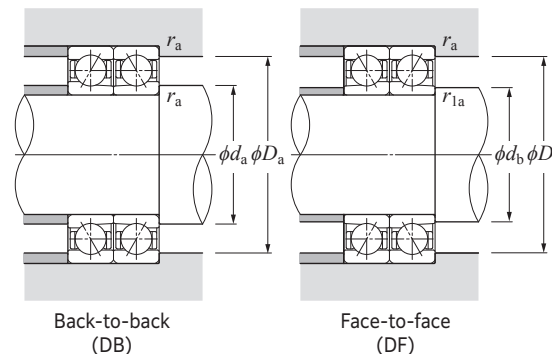

$i f_0 F_a$	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.35								1.57	1.76
0.357	0.36								1.53	1.71
0.714	0.38								1.46	1.64
1.07	0.4								1.42	1.59
1.43	0.41	1	0	0.44			1	0.55	0.72	2.25
2.14	0.43								1.33	1.49
3.57	0.44								1.25	1.4
5.35	0.47								1.18	1.32
7.14	0.49								1.13	1.26

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Angular contact ball bearings for grinding machines / motors
(steel ball spec.)
BNT0 type



Contact angle 15° d 10–70 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions			Abutment and fillet dimensions					Part number		
	mm					dynamic kN	static	dynamic kgf	static	kN	kgf		min ⁻¹	oil lubrication				mm	cm ³	kg	mm	mm	mm	mm	mm		mm	mm
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{1s}</i> min ⁻¹																							
<i>d</i>	<i>D</i>	<i>B</i>	<i>r_s</i> min ⁻¹	<i>r_{1s}</i> min ⁻¹	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	(static)	<i>f₀</i>	grease lubrication	oil lubrication	<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _a min	<i>d</i> _b min	<i>D</i> _a max	<i>r</i> _{as} max	<i>r</i> _{1as} max					
BNT000	10	26	8	0.3	0.15	4.15	1.45	425	148	2.07	211	8.3	60 300	120 100	6.5	0.9	0.015	14.6	13.0	21.0	12.5	11.2	23.5	0.3	0.15	BNT000		
BNT001	12	28	8	0.3	0.15	4.60	1.73	470	176	2.48	253	8.8	52 700	104 900	6.8	1.0	0.020	17.4	15.6	23.5	14.5	13.2	25.5	0.3	0.15	BNT001		
BNT002	15	32	9	0.3	0.15	5.30	2.22	540	226	3.20	325	9.2	46 000	91 500	7.7	1.3	0.029	20.4	18.5	26.5	17.5	16.2	29.5	0.3	0.15	BNT002		
BNT003	17	35	10	0.3	0.15	6.55	2.70	665	275	3.90	395	9.0	41 500	82 700	8.5	1.8	0.033	22.2	20.2	29.6	19.5	18.2	32.5	0.3	0.15	BNT003		
BNT004	20	42	12	0.6	0.3	8.90	3.95	905	405	5.70	580	9.2	34 300	68 300	10.3	3.0	0.057	27.4	24.9	35.5	24.5	22.5	37.5	0.6	0.3	BNT004		
BNT005	25	47	12	0.6	0.3	9.90	4.85	1 010	495	7.05	720	9.6	30 000	59 700	10.9	3.5	0.067	31.8	29.4	40.6	29.5	27.5	42.5	0.6	0.3	BNT005		
BNT006	30	55	13	1	0.6	12.8	6.75	1 310	685	9.75	995	9.8	25 100	50 000	12.3	4.3	0.11	38.4	35.5	47.8	35.5	34.5	49.5	1	0.6	BNT006		
BNT007	35	62	14	1	0.6	16.2	8.95	1 650	910	13.0	1 320	9.8	20 100	40 200	13.6	6.5	0.15	43.4	40.2	53.8	40.5	39.5	56.5	1	0.6	BNT007		
BNT008	40	68	15	1	0.6	17.4	10.4	1 780	1 060	15.1	1 540	10.0	18 100	36 100	14.8	8.0	0.18	48.8	45.7	59.4	45.5	44.5	62.5	1	0.6	BNT008		
BNT009	45	75	16	1	0.6	20.7	12.6	2 110	1 280	18.4	1 870	10.1	16 300	32 500	16.1	9.6	0.23	54.2	50.9	65.6	50.5	49.5	69.5	1	0.6	BNT009		
BNT010	50	80	16	1	0.6	22.0	14.3	2 240	1 460	20.9	2 130	10.2	15 000	30 000	16.8	11	0.26	59.6	55.9	70.2	55.5	54.5	74.5	1	0.6	BNT010		
BNT011	55	90	18	1.1	0.6	28.9	18.7	2 950	1 910	27.3	2 780	10.1	13 200	26 400	18.8	16	0.38	66.1	61.8	79.1	62	59.5	83	1	0.6	BNT011		
BNT012	60	95	18	1.1	0.6	29.7	20.0	3 050	2 040	29.2	2 980	10.3	12 300	24 700	19.5	19	0.40	71.1	66.8	84.1	67	64.5	88	1	0.6	BNT012		
BNT013	65	100	18	1.1	0.6	31.5	22.4	3 200	2 290	32.5	3 350	10.4	11 600	23 200	20.2	20	0.42	75.2	71.8	89.8	72	69.5	93	1	0.6	BNT013		
BNT014	70	110	20	1.1	0.6	39.5	28.1	4 050	2 870	41.0	4 200	10.3	10 600	21 300	22.2	27	0.56	82.3	77.7	97.9	77	74.5	103	1	0.6	BNT014		

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.35					1.57			1.76	2.56
0.357	0.36					1.53			1.71	2.48
0.714	0.38					1.46			1.64	2.38
1.07	0.4					1.42			1.59	2.31
1.43	0.41	1	0	0.44		1.38	1	1.55	0.72	2.25
2.14	0.43					1.33			1.49	2.16
3.57	0.44					1.25			1.4	2.03
5.35	0.47					1.18			1.32	1.92
7.14	0.49					1.13			1.26	1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

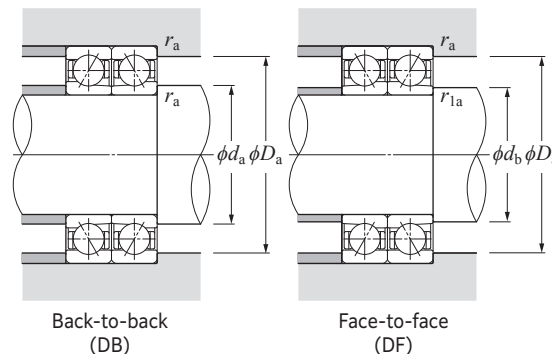


Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Angular contact ball bearings for grinding machines / motors
(steel ball spec.)
BNT2 type



Contact angle 15° d 10–80 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions			Abutment and fillet dimensions					Part number		
	mm					dynamic	static	dynamic	static	kN	kgf		min ⁻¹	mm				cm ³	kg	mm			mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{ls min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀		grease lubrication	oil lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _{a min}	<i>d</i> _{b min}		<i>D</i> _{a max}	<i>r</i> _{as max}
BNT200	10	30	9	0.6	0.3	4.60	1.71	465	175	2.46	250	8.7	53 300	106 800	7.2	1.1	0.019	17.0	15.0	23.0	14.5	12.5	25.5	0.6	0.3	BNT200		
BNT201	12	32	10	0.6	0.3	6.00	2.28	610	232	3.25	330	8.5	48 400	97 000	8.0	1.5	0.025	18.4	16.2	26.0	16.5	14.5	27.5	0.6	0.3	BNT201		
BNT202	15	35	11	0.6	0.3	7.60	2.97	775	300	4.25	430	8.5	42 600	85 400	8.9	2.2	0.035	20.8	18.4	29.4	19.5	17.5	30.5	0.6	0.3	BNT202		
BNT203	17	40	12	0.6	0.3	9.45	3.80	965	385	5.40	555	8.5	37 000	74 100	9.9	2.9	0.054	24.2	21.4	33.6	21.5	19.5	35.5	0.6	0.3	BNT203		
BNT204	20	47	14	1	0.6	12.4	5.35	1 260	545	7.70	785	8.8	30 900	61 900	11.7	4.6	0.092	29.4	26.2	39.4	25.5	24.5	41.5	1	0.6	BNT204		
BNT205	25	52	15	1	0.6	14.1	6.70	1 430	685	9.70	990	9.2	27 300	54 700	12.8	6.1	0.13	33.8	30.7	44.2	30.5	29.5	46.5	1	0.6	BNT205		
BNT206	30	62	16	1	0.6	19.5	9.65	1 990	985	13.9	1 420	9.2	22 900	45 900	14.3	8.3	0.20	40.6	36.6	52.6	35.5	34.5	56.5	1	0.6	BNT206		
BNT207	35	72	17	1.1	0.6	25.7	13.1	2 620	1 330	18.8	1 920	9.1	18 100	36 000	15.8	10	0.29	46.8	42.0	60.6	42	39.5	65	1	0.6	BNT207		
BNT208	40	80	18	1.1	0.6	31.0	16.5	3 150	1 680	23.8	2 430	9.3	16 200	32 100	17.2	13	0.38	53.0	47.7	67.0	47	44.5	73	1	0.6	BNT208		
BNT209	45	85	19	1.1	0.6	34.5	18.9	3 500	1 920	27.3	2 780	9.3	14 900	29 600	18.3	16	0.44	57.3	51.9	73.0	52	49.5	78	1	0.6	BNT209		
BNT210	50	90	20	1.1	0.6	36.5	20.8	3 700	2 120	30.0	3 050	9.5	13 900	27 500	19.5	20	0.46	62.2	56.8	78.0	57	54.5	83	1	0.6	BNT210		
BNT211	55	100	21	1.5	1	45.0	26.2	4 550	2 670	38.0	3 850	9.5	12 300	24 400	21.0	25	0.61	69.0	62.8	86.4	63.5	60.5	91.5	1.5	1	BNT211		
BNT212	60	110	22	1.5	1	54.0	32.5	5 550	3 300	47.0	4 800	9.5	11 000	21 800	22.8	32	0.78	77.0	70.2	96.4	68.5	65.5	101.5	1.5	1	BNT212		
BNT213	65	120	23	1.5	1	59.0	36.0	6 050	3 650	52.0	5 300	9.5	10 300	20 400	24.1	37	1.01	82.5	75.3	102.5	73.5	70.5	111.5	1.5	1	BNT213		
BNT214	70	125	24	1.5	1	64.5	39.5	6 550	4 000	57.0	5 800	9.6	9 700	19 400	25.2	47	1.08	87.0	79.5	108.0	78.5	75.5	116.5	1.5	1	BNT214		
BNT215	75	130	25	1.5	1	67.0	43.0	6 850	4 400	62.5	6 350	9.7	9 200	18 300	26.6	54	1.17	93.0	85.5	114.5	83.5	80.5	121.5	1.5	1	BNT215		
BNT216	80	140	26	2	1	78.5	50.5	8 000	5 150	73.5	7 500	9.7	8 600	17 200	27.9	58	1.45	98.1	90.4	122.0	90	85.5	130	2	1	BNT216		

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$


$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57			1.76	2.56
0.357	0.36				1.53			1.71	2.48
0.714	0.38				1.46			1.64	2.38
1.07	0.4				1.42			1.59	2.31
1.43	0.41	1	0	0.44	1.38	1	0.72	1.55	2.25
2.14	0.43				1.33			1.49	2.16
3.57	0.44				1.25			1.4	2.03
5.35	0.47				1.18			1.32	1.92
7.14	0.49				1.13			1.26	1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

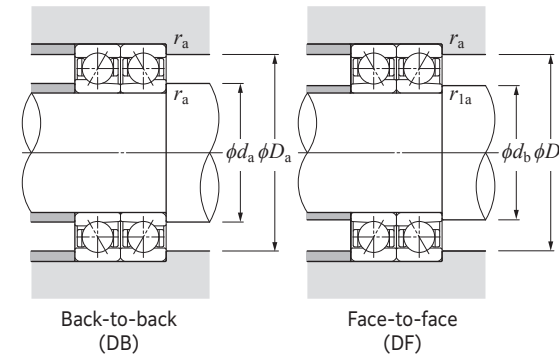


Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Angular contact ball bearings for grinding machines / motors
(ceramic ball spec.)
5S-BNT9 type



Contact angle 15° d 10–65 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center	Internal free space	Mass	Reference dimensions			Abutment and fillet dimensions					Part number		
	mm					dynamic	static	dynamic	static	kN	kgf		min ⁻¹	min ⁻¹				cm ³	kg	mm			mm					
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁻¹}	<i>r</i> _{1s min⁻¹}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀		grease lubrication	oil lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _{a min}	<i>d</i> _{b min}		<i>D</i> _{a max}	<i>r</i> _{as max}
5S-BNT900	10	22	6	0.3	0.15	2.55	0.69	260	70	0.905	92	6.4	72 500	145 600	5.2	0.3	0.009	14.0	12.7	18.0	12.2	11.2	20	0.3	0.15	5S-BNT900		
5S-BNT901	12	24	6	0.3	0.15	2.70	0.78	275	79	1.11	113	6.7	64 400	129 400	5.4	0.4	0.010	16.0	14.7	20.0	14.2	13.2	22	0.3	0.15	5S-BNT901		
5S-BNT902	15	28	7	0.3	0.15	4.10	1.22	415	124	1.60	163	6.6	54 000	108 400	6.4	0.6	0.014	19.0	17.4	24.0	17.2	16.2	26	0.3	0.15	5S-BNT902		
5S-BNT903	17	30	7	0.3	0.15	4.30	1.35	440	138	1.78	182	6.7	49 400	99 100	6.7	0.8	0.015	21.0	19.4	26.0	19.2	18.2	28	0.3	0.15	5S-BNT903		
5S-BNT904	20	37	9	0.3	0.15	6.20	2.07	630	211	2.74	279	6.8	40 700	81 800	8.4	1.4	0.033	25.5	23.5	31.4	22.5	21.5	34.5	0.3	0.15	5S-BNT904		
5S-BNT905	25	42	9	0.3	0.15	6.65	2.46	675	251	3.25	330	7.0	34 600	69 600	9.0	1.7	0.039	30.5	28.5	36.5	27.5	26.5	39.5	0.3	0.15	5S-BNT905		
5S-BNT906	30	47	9	0.3	0.15	7.05	2.84	715	290	3.80	385	7.2	30 100	60 500	9.7	1.9	0.044	35.5	33.5	41.5	32.5	31.5	44.5	0.3	0.15	5S-BNT906		
5S-BNT907	35	55	10	0.6	0.3	11.1	4.40	1 140	445	5.80	590	7.0	24 400	49 300	11.1	2.8	0.063	41.2	38.5	48.8	39.5	37.5	50.5	0.6	0.3	5S-BNT907		
5S-BNT908	40	62	12	0.6	0.3	11.8	5.05	1 210	515	6.70	685	7.2	21 600	43 500	12.9	4.5	0.100	47.0	44.4	55.0	44.5	42.5	57.5	0.6	0.3	5S-BNT908		
5S-BNT909	45	68	12	0.6	0.3	14.7	6.35	1 490	650	8.45	865	7.2	19 500	39 300	13.6	5.2	0.110	52.1	49.1	60.9	49.5	48	63.5	0.6	0.3	5S-BNT909		
5S-BNT910	50	72	12	0.6	0.3	15.5	7.15	1 580	730	9.55	975	7.3	18 000	36 400	14.2	6.2	0.110	56.6	53.6	65.4	54.5	52.5	67.5	0.6	0.3	5S-BNT910		
5S-BNT911	55	80	13	1	0.6	16.2	8.00	1 650	820	10.7	1 090	7.4	16 000	32 000	15.6	7.8	0.160	63.2	60.1	71.8	60.5	59.5	74.5	1	0.6	5S-BNT911		
5S-BNT912	60	85	13	1	0.6	16.9	8.85	1 730	900	11.8	1 200	7.5	14 900	29 800	16.3	8.3	0.170	68.1	65.1	76.9	65.5	64.5	79.5	1	0.6	5S-BNT912		
5S-BNT913	65	90	13	1	0.6	17.1	9.30	1 750	945	12.4	1 270	7.5	13 900	27 900	17.0	8.9	0.190	73.1	70.1	81.9	70.5	69.5	84.5	1	0.6	5S-BNT913		

1) Minimum allowable value for corner radius dimension r or r_1 .


Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$

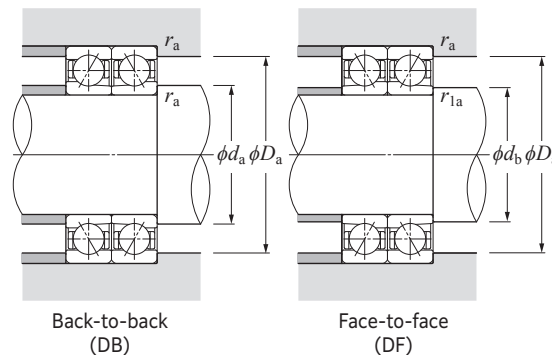

$i f_0 F_a$	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.35					1.57			1.76	2.56
0.357	0.36					1.53			1.71	2.48
0.714	0.38					1.46			1.64	2.38
1.07	0.4					1.42			1.59	2.31
1.43	0.41	1	0	0.44		1.38	1	1.55	0.72	2.25
2.14	0.43					1.33			1.49	2.16
3.57	0.44					1.25			1.4	2.03
5.35	0.47					1.18			1.32	1.92
7.14	0.49					1.13			1.26	1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08


When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

Angular Contact Ball Bearings for Radial Loads

Dimension Tables

NTN

Angular contact ball bearings for grinding machines / motors
(ceramic ball spec.)
5S-BNT0 type



Contact angle 15° d 10–70 mm

Part number	Boundary dimensions					Basic load ratings				Allowable		Factor	Allowable		Load center mm	Internal free space cm ³	Mass kg	Reference			Abutment and					Part number
	mm					dynamic	static	dynamic	static	axial load	speed		oil	dimensions				fillet dimensions								
						kN		kgf		kN	kgf		min ⁻¹	lubrication				lubrication	mm	Single-row	kg	mm	d _a	d _b	D _a	
	d	D	B	r _{s min} ¹⁾	r _{ls min} ¹⁾	C _r	C _{0r}	C _r	C _{0r}	(static)	f ₀		grease	oil	a	(approx.)	(approx.)	d ₁	d ₂	D ₁	min	min	max	max	max	
5S-BNT000	10	26	8	0.3	0.15	4.15	1.01	425	103	1.31	133	5.7	70 100	140 200	6.5	0.9	0.013	14.6	13.0	21.0	12.5	11.2	23.5	0.3	0.15	5S-BNT000
5S-BNT001	12	28	8	0.3	0.15	4.60	1.20	470	122	1.57	160	6.1	61 200	122 400	6.8	1.0	0.018	17.4	15.6	23.5	14.5	13.2	25.5	0.3	0.15	5S-BNT001
5S-BNT002	15	32	9	0.3	0.15	5.30	1.54	540	157	2.02	206	6.4	53 400	106 800	7.7	1.3	0.026	20.4	18.5	26.5	17.5	16.2	29.5	0.3	0.15	5S-BNT002
5S-BNT003	17	35	10	0.3	0.15	6.55	1.87	665	191	2.45	250	6.3	48 300	96 500	8.5	1.8	0.029	22.2	20.2	29.6	19.5	18.2	32.5	0.3	0.15	5S-BNT003
5S-BNT004	20	42	12	0.6	0.3	8.90	2.74	905	279	3.60	365	6.4	39 800	79 700	10.3	3.0	0.050	27.4	24.9	35.5	24.5	22.5	37.5	0.6	0.3	5S-BNT004
5S-BNT005	25	47	12	0.6	0.3	9.90	3.35	1 010	345	4.45	455	6.7	34 900	69 700	10.9	3.5	0.060	31.8	29.4	40.6	29.5	27.5	42.5	0.6	0.3	5S-BNT005
5S-BNT006	30	55	13	1	0.6	12.8	4.65	1 310	475	6.15	630	6.8	29 200	58 400	12.3	4.3	0.10	38.4	35.5	47.8	35.5	34.5	49.5	1	0.6	5S-BNT006
5S-BNT007	35	62	14	1	0.6	16.2	6.20	1 650	630	8.20	835	6.8	23 500	46 900	13.6	6.5	0.13	43.4	40.2	53.8	40.5	39.5	56.5	1	0.6	5S-BNT007
5S-BNT008	40	68	15	1	0.6	17.4	7.20	1 780	735	9.55	975	7.0	21 100	42 100	14.8	8.0	0.16	48.8	45.7	59.4	45.5	44.5	62.5	1	0.6	5S-BNT008
5S-BNT009	45	75	16	1	0.6	20.7	8.75	2 110	890	11.6	1 180	7.0	19 000	37 900	16.1	9.6	0.21	54.2	50.9	65.6	50.5	49.5	69.5	1	0.6	5S-BNT009
5S-BNT010	50	80	16	1	0.6	22.0	9.90	2 240	1 010	13.2	1 340	7.1	17 500	35 000	16.8	11	0.24	59.6	55.9	70.2	55.5	54.5	74.5	1	0.6	5S-BNT010
5S-BNT011	55	90	18	1.1	0.6	28.9	13.0	2 950	1 320	17.2	1 760	7.0	15 500	31 000	18.8	16	0.35	66.1	61.8	79.1	62	59.5	83	1	0.6	5S-BNT011
5S-BNT012	60	95	18	1.1	0.6	29.7	13.9	3 050	1 420	18.4	1 880	7.1	14 500	29 000	19.5	19	0.36	71.1	66.8	84.1	67	64.5	88	1	0.6	5S-BNT012
5S-BNT013	65	100	18	1.1	0.6	31.5	15.5	3 200	1 580	20.7	2 110	7.2	13 600	27 300	20.2	20	0.37	75.2	71.8	89.8	72	69.5	93	1	0.6	5S-BNT013
5S-BNT014	70	110	20	1.1	0.6	39.5	19.5	4 050	1 990	25.9	2 640	7.1	12 500	25 000	22.2	27	0.50	82.3	77.7	97.9	77	74.5	103	1	0.6	5S-BNT014

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension Tables

NTN

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$	C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
0.178	0.35					1.57			1.76	2.56
0.357	0.36					1.53			1.71	2.48
0.714	0.38					1.46			1.64	2.38
1.07	0.4					1.42			1.59	2.31
1.43	0.41	1	0	0.44		1.38	1	1.55	0.72	2.25
2.14	0.43					1.33			1.49	2.16
3.57	0.44					1.25			1.4	2.03
5.35	0.47					1.18			1.32	1.92
7.14	0.49					1.13			1.26	1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

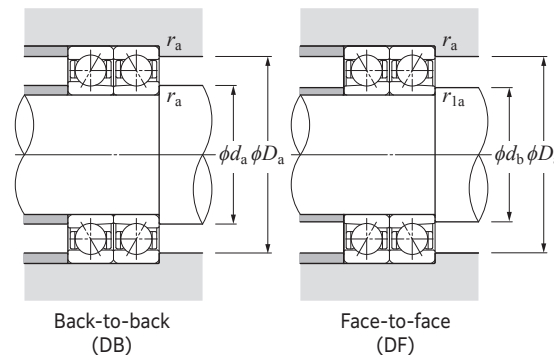


Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Angular contact ball bearings for grinding machines / motors
(ceramic ball spec.)
5S BNT2 type



Contact angle 15° d 10–80 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Factor	Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions			Abutment and fillet dimensions					Part number	
	mm					dynamic	static	dynamic	static	kN	kgf		min ⁻¹	oil				mm	kg	mm	mm	mm	mm	mm	mm		mm
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min} ⁻¹⁾	<i>r</i> _{1s min} ⁻¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}	(static)	<i>f</i> ₀		grease lubrication	lubrication				<i>a</i>	Single-row (approx.)	Single-row (approx.)	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>d</i> _{a min}	<i>d</i> _{b min}		<i>D</i> _{a max}
5S-BNT200	10	30	9	0.6	0.3	4.60	1.19	465	121	1.55	158	6.0	63 000	126 000	7.2	1.1	0.017	17.0	15.0	23.0	14.5	12.5	25.5	0.6	0.3	5S-BNT200	
5S-BNT201	12	32	10	0.6	0.3	6.00	1.58	610	161	2.05	209	5.9	57 300	114 500	8.0	1.5	0.021	18.4	16.2	26.0	16.5	14.5	27.5	0.6	0.3	5S-BNT201	
5S-BNT202	15	35	11	0.6	0.3	7.60	2.05	775	210	2.67	272	5.9	50 400	100 800	8.9	2.2	0.030	20.8	18.4	29.4	19.5	17.5	30.5	0.6	0.3	5S-BNT202	
5S-BNT203	17	40	12	0.6	0.3	9.45	2.63	965	268	3.40	350	5.9	43 800	87 500	9.9	2.9	0.046	24.2	21.4	33.6	21.5	19.5	35.5	0.6	0.3	5S-BNT203	
5S-BNT204	20	47	14	1	0.6	12.4	3.70	1 260	380	4.85	495	6.1	36 500	73 000	11.7	4.6	0.080	29.4	26.2	39.4	25.5	24.5	41.5	1	0.6	5S-BNT204	
5S-BNT205	25	52	15	1	0.6	14.1	4.65	1 430	475	6.10	625	6.4	32 300	64 600	12.8	6.1	0.11	33.8	30.7	44.2	30.5	29.5	46.5	1	0.6	5S-BNT205	
5S-BNT206	30	62	16	1	0.6	19.5	6.70	1 990	680	8.80	895	6.4	27 100	54 200	14.3	8.3	0.18	40.6	36.6	52.6	35.5	34.5	56.5	1	0.6	5S-BNT206	
5S-BNT207	35	72	17	1.1	0.6	25.7	9.05	2 620	925	11.9	1 210	6.3	21 300	42 500	15.8	10	0.25	46.8	42.0	60.6	42	39.5	65	1	0.6	5S-BNT207	
5S-BNT208	40	80	18	1.1	0.6	31.0	11.4	3 150	1 170	15.0	1 530	6.4	19 000	37 900	17.2	13	0.33	53.0	47.7	67.0	47	44.5	73	1	0.6	5S-BNT208	
5S-BNT209	45	85	19	1.1	0.6	34.5	13.1	3 500	1 330	17.2	1 750	6.5	17 500	35 000	18.3	16	0.37	57.3	51.9	73.0	52	49.5	78	1	0.6	5S-BNT209	
5S-BNT210	50	90	20	1.1	0.6	36.5	14.4	3 700	1 470	19.0	1 940	6.6	16 300	32 500	19.5	20	0.39	62.2	56.8	78.0	57	54.5	83	1	0.6	5S-BNT210	
5S-BNT211	55	100	21	1.5	1	45.0	18.1	4 550	1 850	23.9	2 440	6.6	14 500	28 900	21.0	25	0.52	69.0	62.8	86.4	63.5	60.5	91.5	1.5	1	5S-BNT211	
5S-BNT212	60	110	22	1.5	1	54.0	22.4	5 550	2 290	29.5	3 000	6.6	12 900	25 900	22.8	32	0.65	77.0	70.2	96.4	68.5	65.5	101.5	1.5	1	5S-BNT212	
5S-BNT213	65	120	23	1.5	1	59.0	24.9	6 050	2 530	33.0	3 350	6.6	12 100	24 200	24.1	37	0.86	82.5	75.3	102.5	73.5	70.5	111.5	1.5	1	5S-BNT213	
5S-BNT214	70	125	24	1.5	1	64.5	27.3	6 550	2 790	36.0	3 650	6.6	11 500	23 000	25.2	47	0.91	87.0	79.5	108.0	78.5	75.5	116.5	1.5	1	5S-BNT214	
5S-BNT215	75	130	25	1.5	1	67.0	29.8	6 850	3 050	39.5	4 000	6.7	10 800	21 600	26.6	54	0.98	93.0	85.5	114.5	83.5	80.5	121.5	1.5	1	5S-BNT215	
5S-BNT216	80	140	26	2	1	78.5	35.0	8 000	3 600	46.5	4 750	6.7	10 200	20 400	27.9	58	1.21	98.1	90.4	122.0	90	85.5	130	2	1	5S-BNT216	

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Radial Loads

Dimension
Tables

NTN

Dynamic equivalent radial load

$$P_r = X F_r + Y F_a$$


$i f_0 F_a$ C_{0r}	e	Single row / Tandem				Back-to-back / Face-to-face			
		$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
		X	Y	X	Y	X	Y	X	Y
0.178	0.35				1.57			1.76	2.56
0.357	0.36				1.53			1.71	2.48
0.714	0.38				1.46			1.64	2.38
1.07	0.4				1.42			1.59	2.31
1.43	0.41	1	0	0.44	1.38	1	0.72	1.55	2.25
2.14	0.43				1.33			1.49	2.16
3.57	0.44				1.25			1.4	2.03
5.35	0.47				1.18			1.32	1.92
7.14	0.49				1.13			1.26	1.83

Static equivalent radial load

$$P_{0r} = X_0 F_r + Y_0 F_a$$

Single row / Tandem		Back-to-back / Face-to-face	
X_0	Y_0	X_0	Y_0
0.52	0.54	1.04	1.08

When $P_{0r} < F_r$ with single-row or tandem arrangement, $P_{0r} = F_r$.

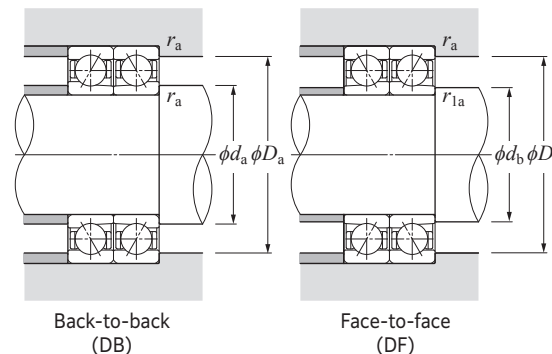



Main Spindle Bearings

10. Cylindrical Roller Bearings CONTENTS

10.1	Double-row cylindrical roller bearings	252
10.2	Single-row cylindrical roller bearings	253
10.3	Bearing designations	254
10.4	Accuracy of tapered bore	255
10.5	Accuracy of cylindrical roller bearings	256
10.6	Radial internal clearance of cylindrical roller bearings	258
10.7	Recommended fits of high-precision cylindrical roller bearings	260
10.8	Recommended lubrication specifications	261
10.9	Ultra high speed double-row cylindrical roller bearings NN30HSRT6 type	262
10.10	Ultra high speed single-row cylindrical roller bearings N10HSRT6 type	264
10.11	Eco-friendly air-oil lubricated ultra high speed single-row cylindrical roller bearings N10HSLT6 type	268
Dimension Tables		
	Double-row cylindrical roller bearings	270
	High speed single-row cylindrical roller bearings	276
	Ultra high speed single-row cylindrical roller bearings	280
	Eco-friendly ultra high speed single-row cylindrical roller bearings	282
10.12	Taper gauge and mounted internal clearance adjustment gauge for NTN precision cylindrical roller bearings	284
	Dimension table for taper gauge	284
	Dimension table for mounted internal clearance adjustment gauge	285

10. Cylindrical Roller Bearings

In a cylindrical roller bearing, the rollers and raceways are in line contact. Consequently this type of bearing can support a larger radial load than a point-contact ball bearing. Also, its design is suitable for high speed operation.

A cylindrical roller bearing used for the main spindle of a machine tool can have either a double- or single-row configuration, and certain variants have a tapered bore so the radial internal clearance can be adjusted.

10.1 Double-row cylindrical roller bearings

Double-row cylindrical roller bearings are available in two types, NN and NNU, and two series, 30 and 49. The rollers in the NN type bearing are guided by the ribs of the inner ring. The rollers in the NNU type bearing are guided by the ribs of the outer ring. Bearings are available with either a tapered bore (which allows adjustment of radial internal clearance of bearing) or a standard cylindrical bore.

The bearings come in two types, standard type and high speed HS type. Standard cage is machined brass.

The NN30 type bearing, with a bore diameter from 65 to 140 mm, has an optimized internal specification and PEEK resin cage. This allows for high speed and longer life, and is available as a high speed NN30HST6 and as an ultra high speed ULTAGE™ series NN30HSRT6 type.

All of these bearing types can be lubricated with either grease or air-oil.

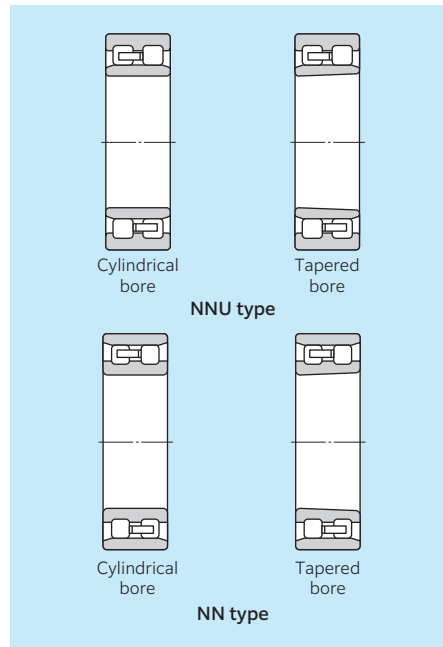


Fig. 10.1

10.2 Single-row cylindrical roller bearings

Single-row cylindrical roller bearings are available in two types, high speed N10HS type and ULTAGE™ series ultra high speed N10HSRT6 type. The N10HS type bearings have high strength machined brass cages, while the N10HSRT6 type bearings have PEEK resin cages, which can be used for both grease lubrication and air-oil lubrication. The ULTAGE™ series eco-friendly ultra high speed N10HSLT6 type is a variation from the ultra high speed N10HSRT6 type bearing and can be used with air-oil lubrication only.

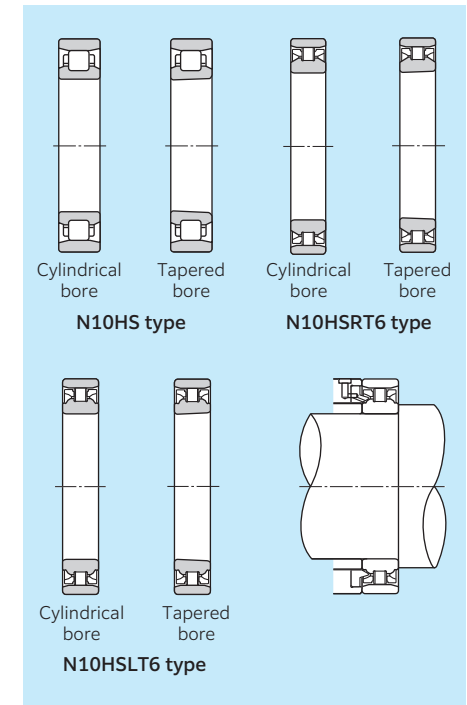


Fig. 10.2

10.3 Bearing designations

NN49, 30, NNU49 types

NN 30 20 HSR T6 K C0NA P4

- Precision class**
P5: JIS Class 5 P2: JIS Class 2
P4: JIS Class 4 UP: Special high precision
- Internal clearance code**
See Table 10.4 through Table 10.6
- External configuration code**
K: Bore diameter tapered bore, taper ratio 1/12
No code: Bore diameter cylindrical bore
- Cage code**
No code: Machined brass cage
T6: PEEK resin cage
- Internal modification code**
No code: Standard specification
HS: High speed specification
HSR: Ultra high speed specification
- Bore diameter code**
- Dimension series code**
- Bearing type code**
NN: Double-row, inner ring with rib
NNU: Double-row, outer ring with rib

N10HS, N10HSRT6 types

N 10 20 HSR T6 K C0NA P4

- Cage code**
T6: PEEK resin cage (HSR type)
No code: High strength machined brass cage
- Internal modification code**
HS: High speed specification
HSR: Ultra high speed specification
- Bearing type code**
N: Single-row, inner ring with rib

N10HSLT6 type

N 10 20 HSL T6 K C0NA P4 +TKZ

- Spacer code** (Eco- friendly nozzle)
- Cage code**
T6: PEEK resin cage
- Internal modification code**

(Note) N10HSL: Bearing series code
TKZ: Eco-friendly nozzle, or spacer with nozzle (for N10HSL)

10.4 Accuracy of tapered bore

NTN specifies the accuracies of tapered bores conforming with JIS Classes 4 and 2 as shown in Table 10.1. Poor accuracies of the tapered bore lead to misalignment of the inner ring, causing poor performance, premature seizure and spalling. Use of a taper gauge is


recommended for higher accuracy of the main bores. Refer to "6 Handling of Bearings, 6.8 Tapered bore cylindrical roller bearing and main spindle taper angle" in the Technical Data section for more information on taper angle.

Table 10.1 Tolerance of tapered bore bearings

Unit: μm

d (mm)		Δ_{dmp}		$\Delta_{d1mp} - \Delta_{dmp}$ (approx.)		V_{dsp}	
over	incl.	Class 4 high	Class 2 low	Class 4 high	Class 2 low	Class 4 max	Class 2 max
18	30	+10	0	+ 6	0	2.5	1.5
30	50	+12	0	+ 7	0	2.5	1.5
50	80	+15	0	+ 8	0	3	2
80	120	+20	0	+10	0	4	2.5
120	180	+25	0	+12	0	5	3.5
180	250	+29	0	+14	0	7	4.5
250	315	+32	0	—	—	8	—
315	400	+36	0	—	—	9	—
400	500	+40	0	—	—	10	—

Note: NTN standard

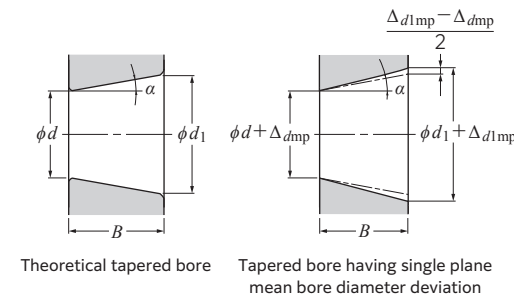

Theoretical tapered bore Tapered bore having single plane mean bore diameter deviation

Tolerance of 1/12 taper angle $4^{\circ}46'18.8'' \begin{smallmatrix} +24'' \\ 0 \end{smallmatrix}$
 $\alpha = 2^{\circ}23'9.4''$

$$d_1 = d + \frac{1}{12} B$$

Δ_{dmp} : Dimensional difference of the mean bore diameter within the flat surface at the theoretical small end of the tapered bore

Δ_{d1mp} : Dimensional difference of the mean bore diameter within the flat surface at the theoretical large end of the tapered bore

V_{dsp} : Variation of bore diameter in a single plane

B : Nominal inner ring width

Fig. 10.3

10.5 Accuracy of cylindrical roller bearings

Table 10.2 Inner rings

Nominal bore diameter d	mm over incl.	Deviation of mean bore diameter in a single plane Δ_{dmp}						Variation of bore diameter in a single plane V_{dsp}						Variation of mean bore diameter V_{dmp}						Radial runout of inner ring of assembled bearing K_{ia}					
		Class 5 high	Class 4 ¹⁾ low	Class 4 ¹⁾ high	Class 2 ¹⁾ low	Class 2 ¹⁾ high	Class 2 ¹⁾ low	Diameter series 9 Class 5 max	Diameter series 9 Class 4 max	Diameter series 0 Class 5 max	Diameter series 0 Class 4 max	Diameter series 0 Class 2 max	Diameter series 0 Class 2 max	Class 5 max	Class 4 max	Class 2 max	Class 5 max	Class 4 max	Class 2 max	Class 5 max	Class 4 max	Class 2 max	Class 5 max	Class 4 max	Class 2 max
18	30	0	-6	0	-5	0	-2.5	6	5	2.5	5	4	2.5	3	2.5	1.5	4	3	2.5						
30	50	0	-8	0	-6	0	-2.5	8	6	2.5	6	5	2.5	4	3	1.5	5	4	2.5						
50	80	0	-9	0	-7	0	-4	9	7	4	7	5	4	5	3.5	2	5	4	2.5						
80	120	0	-10	0	-8	0	-5	10	8	5	8	6	5	5	4	2.5	6	5	2.5						
120	150	0	-13	0	-10	0	-7	13	10	7	10	8	7	7	5	3.5	8	6	2.5						
150	180	0	-13	0	-10	0	-7	13	10	7	10	8	7	7	5	3.5	8	6	5						
180	250	0	-15	0	-12	0	-8	15	12	8	12	9	8	8	6	4	10	8	5						
250	315	0	-18	—	—	—	—	18	—	—	14	—	—	9	—	—	13	—	—						
315	400	0	-23	—	—	—	—	23	—	—	18	—	—	12	—	—	15	—	—						
400	500	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—						

1) The dimensional difference Δ_{ds} of the measured bore diameter applied to Classes 4 and 2 is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane.

Table 10.3 Outer rings

Nominal outside diameter D	mm over incl.	Deviation of mean outside diameter in a single plane Δ_{Dmp}						Variation of outside diameter in a single plane V_{Dsp}						Variation of mean outside diameter V_{Dmp}						Radial runout of outer ring of assembled bearing K_{ea}					
		Class 5 high	Class 4 ²⁾ low	Class 4 ²⁾ high	Class 2 ²⁾ low	Class 2 ²⁾ high	Class 2 ²⁾ low	Diameter series 9 Class 5 max	Diameter series 9 Class 4 max	Diameter series 0 Class 5 max	Diameter series 0 Class 4 max	Diameter series 0 Class 2 max	Diameter series 0 Class 2 max	Class 5 max	Class 4 max	Class 2 max	Class 5 max	Class 4 max	Class 2 max	Class 5 max	Class 4 max	Class 2 max	Class 5 max	Class 4 max	Class 2 max
30	50	0	-7	0	-6	0	-4	7	6	4	5	5	4	4	3	2	7	5	2.5						
50	80	0	-9	0	-7	0	-4	9	7	4	7	5	4	5	3.5	2	8	5	4						
80	120	0	-10	0	-8	0	-5	10	8	5	8	6	5	5	4	2.5	10	6	5						
120	150	0	-11	0	-9	0	-5	11	9	5	8	7	5	6	5	2.5	11	7	5						
150	180	0	-13	0	-10	0	-7	13	10	7	10	8	7	7	5	3.5	13	8	5						
180	250	0	-15	0	-11	0	-8	15	11	8	11	8	8	8	6	4	15	10	7						
250	315	0	-18	0	-13	0	-8	18	13	8	14	10	8	9	7	4	18	11	7						
315	400	0	-20	0	-15	0	-10	20	15	10	15	11	10	10	8	5	20	13	8						
400	500	0	-23	—	—	—	—	23	—	—	17	—	—	12	—	—	23	—	—						
500	630	0	-28	—	—	—	—	28	—	—	21	—	—	14	—	—	25	—	—						
630	800	0	-35	—	—	—	—	35	—	—	26	—	—	18	—	—	30	—	—						

2) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Classes 4 and 2 is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane.

Unit: μm

Perpendicularity of inner ring face with respect to the bore S_d			Deviation of a single inner ring width Δ_{Bs} Single bearing				Variation of inner ring width V_{Bs}		
Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	Class 2	Class 5	Class 4	Class 2
max	max	max	high	low	high	low	max	max	max
8	4	1.5	0	-120	0	-120	5	2.5	1.5
8	4	1.5	0	-120	0	-120	5	3	1.5
8	5	1.5	0	-150	0	-150	6	4	1.5
9	5	2.5	0	-200	0	-200	7	4	2.5
10	6	2.5	0	-250	0	-250	8	5	2.5
10	6	4	0	-250	0	-250	8	5	4
11	7	5	0	-300	0	-300	10	6	5
13	—	—	0	-350	—	—	13	—	—
15	—	—	0	-400	—	—	15	—	—
—	—	—	—	—	—	—	—	—	—

Unit: μm

Perpendicularity of outer ring outside surface with respect to the face S_D			Deviation of a single outer ring width Δ_{Cs}		Variation of outer ring width V_{Cs}		
Class 5	Class 4	Class 2	All classes		Class 5	Class 4	Class 2
max	max	max			max	max	max
8	4	1.5	Depends on tolerance of Δ_{Bs} in relation to d of the same bearing		5	2.5	1.5
8	4	1.5			6	3	1.5
9	5	2.5			8	4	2.5
10	5	2.5			8	5	2.5
10	5	2.5			8	5	2.5
11	7	4			10	7	4
13	8	5			11	7	5
13	10	7			13	8	7
15	—	—			15	—	—
18	—	—			18	—	—
20	—	—			20	—	—

10.6 Radial internal clearance of cylindrical roller bearings

■ Non-interchangeable radial internal clearance

Two types of radial internal clearance are available: non-interchangeable radial internal clearance for which the combination of outer ring and inner ring cannot be changed; and interchangeable radial internal clearance that allows for different outer ring and inner ring combinations. The clearances listed are common to both double-row and the single-row cylindrical roller bearings. For machine components including high-precision machine tool main spindle, bearings with

non-interchangeable radial internal clearance and a small clearance range are used. If a tapered bore bearing is used and the adjust required internal clearance is close to zero, use of clearance in the range C0NA and C1NA is recommended. Cylindrical bore bearings are also available in the form of a specialized product with non-interchangeable radial internal clearance, in which the internal clearance is further controlled over a small range after assembly. For details, contact **NTN** Engineering.

Table 10.4 Cylindrical bore bearings Unit: μm

Nominal bore diameter d (mm)		Cylindrical bore bearing					
		C1NA		C2NA		NA ¹⁾	
over	incl.	min	max	min	max	min	max
24	30	5	10	10	25	25	35
30	40	5	12	12	25	25	40
40	50	5	15	15	30	30	45
50	65	5	15	15	35	35	50
65	80	10	20	20	40	40	60
80	100	10	25	25	45	45	70
100	120	10	25	25	50	50	80
120	140	15	30	30	60	60	90
140	160	15	35	35	65	65	100
160	180	15	35	35	75	75	110
180	200	20	40	40	80	80	120
200	225	20	45	45	90	90	135
225	250	25	50	50	100	100	150
250	280	25	55	55	110	110	165
280	315	30	60	60	120	120	180
315	355	30	65	65	135	135	200
355	400	35	75	75	150	150	225
400	450	45	85	85	170	170	255
450	500	50	95	95	190	190	285

1) The code for normal clearance is "NA". Ex: N1006HSNA

Table 10.5 Tapered bore bearings Unit: μm

Nominal bore diameter d (mm)		Tapered bore bearing ¹⁾					
		C9NA		C0NA		C1NA	
		min	max	min	max	min	max
24	30	5	10	10	20	10	25
30	40	5	12	10	20	12	25
40	50	5	15	10	20	15	30
50	65	5	15	10	20	15	35
65	80	10	20	15	30	20	40
80	100	10	25	20	35	25	45
100	120	10	25	20	35	25	50
120	140	15	30	25	40	30	60
140	160	15	35	30	45	35	65
160	180	15	35	30	45	35	75
180	200	20	40	30	50	40	80
200	225	20	45	35	55	45	90
225	250	25	50	40	65	50	100
250	280	25	55	40	65	55	110
280	315	30	60	45	75	60	120
315	355	30	65	45	75	65	135
355	400	35	75	50	90	75	150
400	450	45	85	60	100	85	170
450	500	50	95	70	115	95	190

1) Applies to bearings of JIS Class 5 or higher.

■ Interchangeable radial internal clearance (cylindrical bore)

Table 10.6 Unit: μm

Nominal bore diameter d (mm)		C2		CN (Normal)		C3	
		min	max	min	max	min	max
24	30	0	25	20	45	35	60
30	40	5	30	25	50	45	70
40	50	5	35	30	60	50	80
50	65	10	40	40	70	60	90
65	80	10	45	40	75	65	100
80	100	15	50	50	85	75	110
100	120	15	55	50	90	85	125
120	140	15	60	60	105	100	145
140	160	20	70	70	120	115	165
160	180	25	75	75	125	120	170
180	200	35	90	90	145	140	195
200	225	45	105	105	165	160	220
225	250	45	110	110	175	170	235
250	280	55	125	125	195	190	260
280	315	55	130	130	205	200	275
315	355	65	145	145	225	225	305
355	400	100	190	190	280	280	370
400	450	110	210	210	310	310	410
450	500	110	220	220	330	330	440

■ Adjustment of clearance in tapered bore bearings

Mounted internal clearance of a tapered bore bearing can be adjusted by controlling the drive-up of the tapered bore onto the shaft. Two types of adjusting methods area available: repeated adjustment of spacer

width and adjustment with using a mounted internal clearance gauge. The clearance gauge is convenient for mass-production. Refer to "6. Handling of Bearings, 6.7 Clearance adjustment for cylindrical roller bearing" in the Technical Data section.

10.7 Recommended fits of high-precision cylindrical roller bearings

In order to maintain the high precision of the bearing at d_{mn} values less than 0.75×10^6 the fits listed in **Table 10.7** and **Table 10.8** are recommended [d_{mn} : pitch circle diameter across rolling elements (mm) multiplied by speed (min^{-1})].

Table 10.7 Shaft fits Unit: μm

Nominal bore diameter d (mm)		Fit between inner ring and shaft
over	incl.	
18	30	0– 4T
30	50	0– 5T
50	80	1T– 6T
80	120	1T– 6T
120	180	2T– 8T
180	250	2T– 8T
250	315	3T–10T
315	400	4T–11T

Note 1: Target the median value.
T: Tight (Interference) fit
Not applicable to tapered bore bearings

■ Fits of tapered bore bearings

When fitting a tapered bore bearing onto a shaft, carefully and thoroughly adjust the fit of the tapered bore to the shaft to maintain high precision of the bearing.

For details of taper angle adjustment refer to "6. Handling of Bearings, 6.8 Cylindrical roller bearing and main spindle taper angle" in the Technical Data section.

When the d_{mn} value is larger than 0.75×10^6 (d_{mn} value $\geq 0.75 \times 10^6$), consult **NTN Engineering** about the recommended fit. Expansion of the inner ring due to centrifugal force must be considered when determining shaft fit.

Table 10.8 Housing fits Unit: μm

Nominal outside diameter D (mm)		Fit between outer ring and housing
over	incl.	
30	50	0–3T
50	80	0–4T
80	120	0–4T
120	150	0–5T
150	180	0–5T
180	250	0–6T
250	315	0–7T
315	400	0–8T
400	500	0–9T

Note 1: Target the median value.
T: Tight (Interference) fit

10.8 Recommended lubrication specifications

Cylindrical roller bearings are usually used with grease lubrication or air-oil lubrication. Recommended lubrication specifications are described below.

■ Grease lubrication

● Recommended brand of grease

Refer to "7. Lubrication of Bearings, 7.1 Grease lubrication" in the Technical Data section.

● Recommended grease fill

10 to 15 % of the internal free space shown in the dimension tables
It is recommended to aim for the lower limit to reduce the running-in operation time.

● Recommended grease packing method

Refer to "6. Handling of Bearings, 6.1 Cleaning and filling with grease" in the Technical Data section.

■ Air-oil lubrication

● Recommended location of nozzle

Refer to "7. Lubrication of Bearings, 7.2 Air-oil lubrication" in the Technical Data section.

● Recommended specifications of nozzle

Nozzle bore diameter.: From 1 to 1.5 mm
Number of nozzles: One nozzle for each bearing, depth of nozzle bore should be three to six times the nozzle diameter.

● Recommended specifications of air-oil

Oil type: Spindle oil
Viscosity grade: ISO VG from 10 to 32 (32 is preferable)

Table 10.9 Air and oil amount

Bearing type	d_{mn} value ($\times 10^6$)		Oil amount per shot cm^3	Lubrication interval min	Oil consumption cm^3/h	Recommended air consumption $\text{NL}/\text{min}^{1)}$
	Over	Incl.				
NN30	—	1.0	0.02	8	0.15	30 to 40
NN30HS	1.0	1.5		5	0.24	
N10HS	1.5	2.3		5	0.24	
N10HSRT6	—	1.7		15	0.08	
NN30HST6	—	1.7		15	0.08	20 to 40
NN30HSRT6	—	1.7		15	0.08	
N10HSLT6	—	2.3		10	0.12	20 to 40

1) NL/min (Normal liter/minute) -- NL means the volume of air at 0 °C and 1 atmosphere.


10.9 **ULTAGE** Ultra high speed double-row cylindrical roller bearings NN30HSRT6 type

NN30HSRT6 ultra high speed double-row cylindrical roller bearings have higher operating speeds with the same level of rigidity and capacity as the conventional series.

■ Features

1. Optimized internal design to realize high speed and low temperature rise.
2. PEEK resin cage is used for high speed under grease & air-oil lubrication and grease life.

■ Permissible speed range

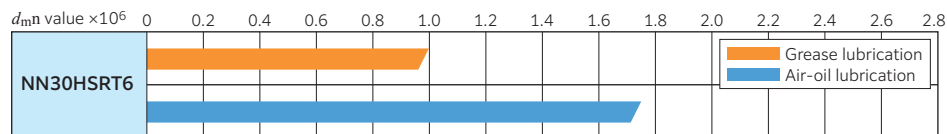

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine for which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline, and then, contact **NTN** Engineering for technical assistance.

■ Cage design

Cage is made of PEEK which is very light and strong (see **Photo 10.1**).

By using a proven cage design made of PEEK material, less deformation of the cage is seen due to centrifugal force. As a result, the high speed operation of the bearing is improved. The grease life of the bearing is improved by including a pocket for grease in the cage.



Photo 10.1 PEEK resin cage

■ Bearing specification

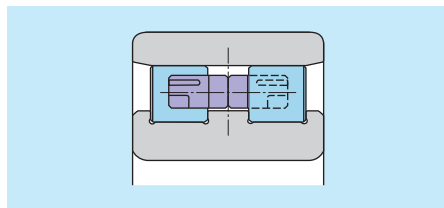


Fig. 10.4 NN30HSRT6 type

■ Data/Operation test

d_{mn} value of 1.0×10^6 under grease lubrication and 1.75×10^6 under air-oil lubrication are realized by the optimized internal design (see **Fig. 10.5** and **Fig. 10.6**).

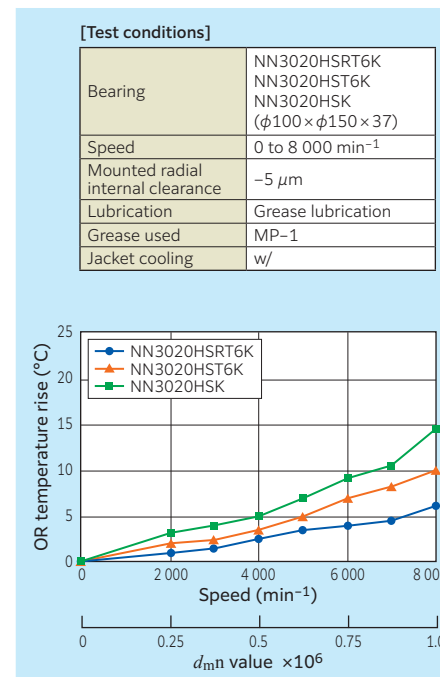


Fig. 10.5 Operation test results (grease lubrication with jacket cooling)

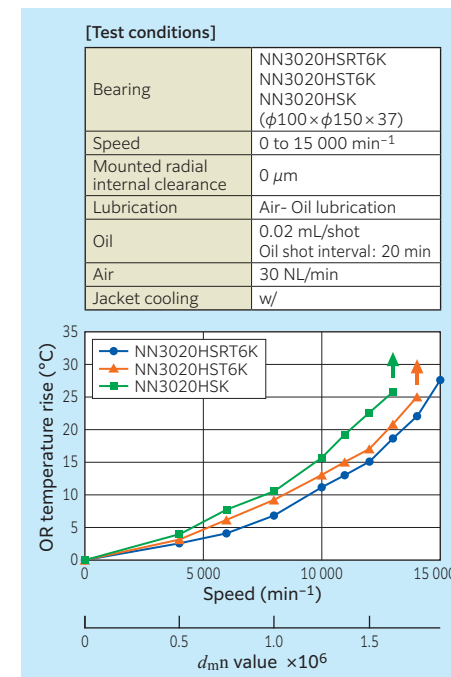


Fig. 10.6 Operation test results (air-oil lubrication with jacket cooling)

■ Data/Durability test

By including a pocket for grease in the cage, the NN30HSRT6K type is capable operating for 13 800 hours under a d_{mn} value of 1.0×10^6 (see **Fig. 10.7**).

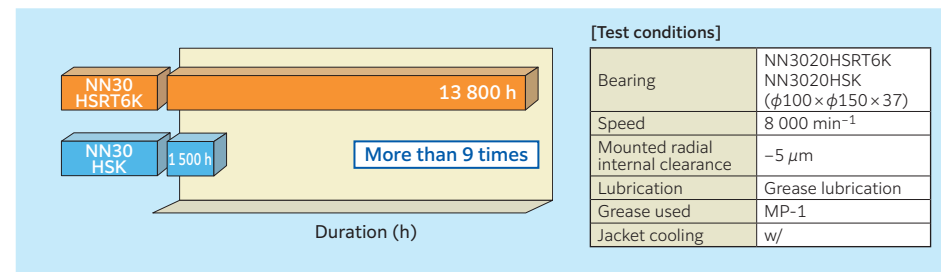


Fig. 10.7 Durability test results

10.10 **ULTAGE** Ultra high speed single-row cylindrical roller bearings N10HSRT6 type

N10HSRT6 type cylindrical roller bearings have been designed for high speed operation.

■ Features

1. Optimized internal design allows high speed operation and limits temperature rise.
2. PEEK resin cage is suitable for high speed operation.

■ Bearing specification


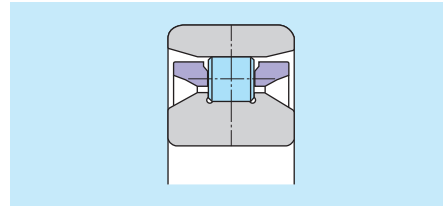


Fig. 10.8 N10HSRT6 type


■ Permissible speed range

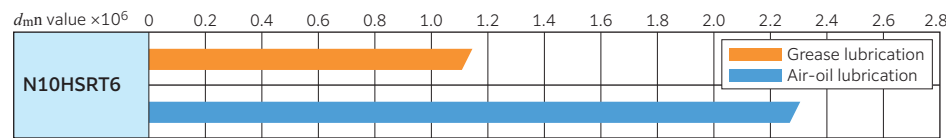

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine for which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline, and then, contact **NTN** Engineering for technical assistance.

■ Simplified main spindle configuration / adoption of simplified lubrication system

Due to an optimized internal structure, the N10HSR type bearings can reliably run at a higher speed with grease lubrication. The grease lubrication system greatly contributes to reduction in pollution of the surrounding environments by virtually eliminating oil mist (see Fig. 10.9).

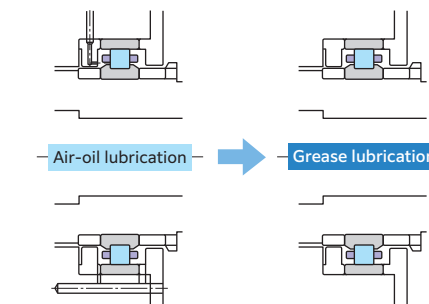


Capable of replacing air-oil lubricated bearings up to d_{mn} value of 1.15×10^6 .

Fig. 10.9 Modification of lubrication system

■ Simplified main spindle configuration / simplified main spindle rear structure

N10HSR (N10HSL) type bearings can replace angular contact ball bearings on the rear side of the main spindle. This arrangement decreases the number of bearing rows (two rows to one row) and eliminates the ball slide mechanism, greatly contributing to simplification of the rear structure (see Fig. 10.10).

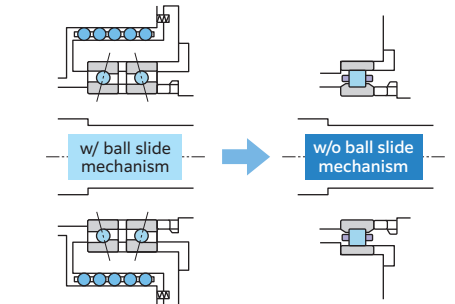

Capable of replacing angular contact ball bearings up to d_{mn} value of 2.3×10^6 [air-oil lubrication] or 1.15×10^6 [grease lubrication].

Fig. 10.10 Simplified main spindle rear structure

Data/High speed operation test

Due to an optimized internal design, the N10HSR type is capable of high speed operation with d_{mn} value of 1.15×10^6 [grease lubrication] or 2.3×10^6 [air-oil lubrication] (see Fig. 10.11 through Fig. 10.14).

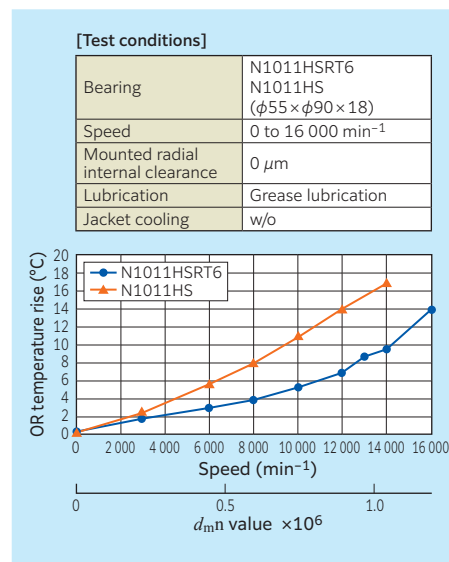


Fig. 10.11 High speed test results (grease lubrication without jacket cooling)

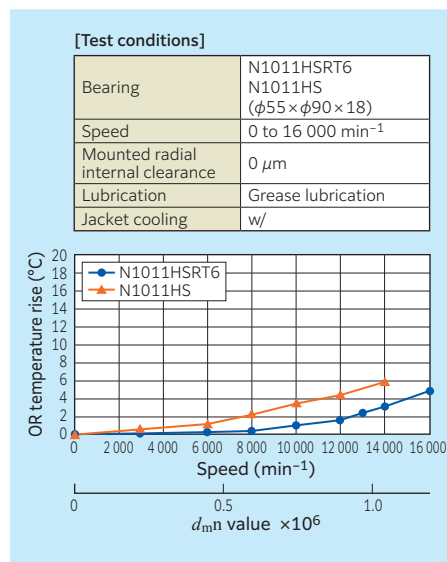


Fig. 10.12 High speed test results (grease lubrication with jacket cooling)

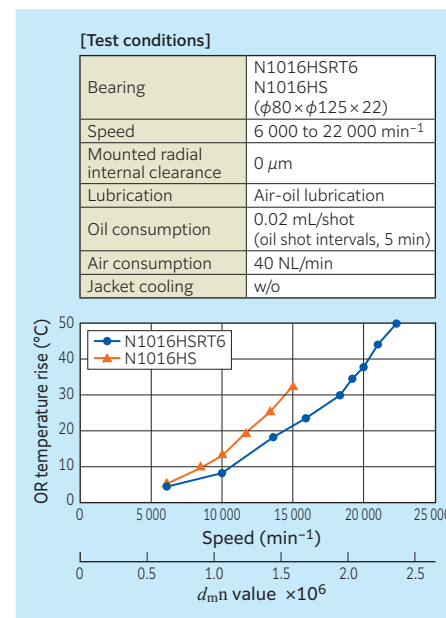


Fig. 10.13 High speed test results (air-oil lubrication without jacket cooling)

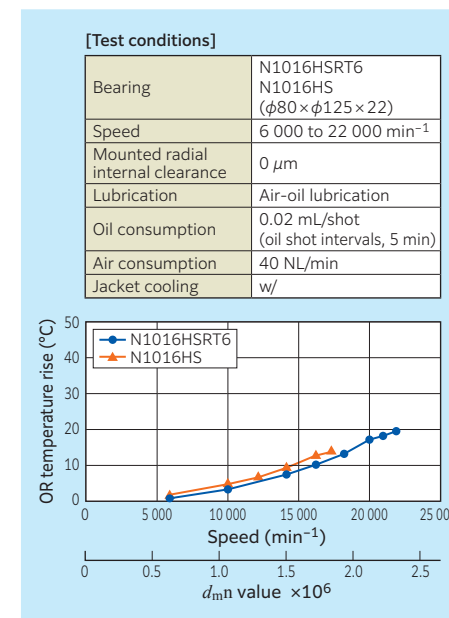


Fig. 10.14 High speed test results (air-oil lubrication with jacket cooling)


10.11 **ULTAGE** Eco-friendly air-oil lubricated ultra high speed single-row cylindrical roller bearings N10HSLT6 type

The eco-friendly air-oil lubricated N10HSLT6 type was developed by applying NTN's unique eco-conscious technology to the proven N10HSRT6 type bearing design. The N10HSLT6 type boasts limited emission of oil mist and reduced air and oil consumption. This improves operating environments, saves energy while allowing higher speed machining operation.

■ Features

1. Optimized internal design allows high speed operation and limits temperature rise.
2. Adoption of the eco-friendly nozzle design has led to:
 - Lower noise level (up to 7 dBA reduction)
 - 50 % reduction in air consumption
 - 50 % reduction in oil consumption.

■ Permissible speed range



Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine for which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline, and then, contact **NTN** Engineering for technical assistance.

■ Bearing specification

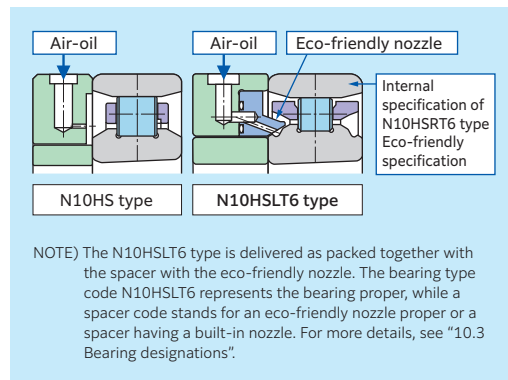


Fig. 10.15 N10HSLT6 type

■ Data/High speed operation test

Even with decreased air consumption and oil consumption, the N10HSL type bearings can reliably operate at high speed of d_{mn} value 2.3×10^6 (see Fig. 10.16 and Fig. 10.17).

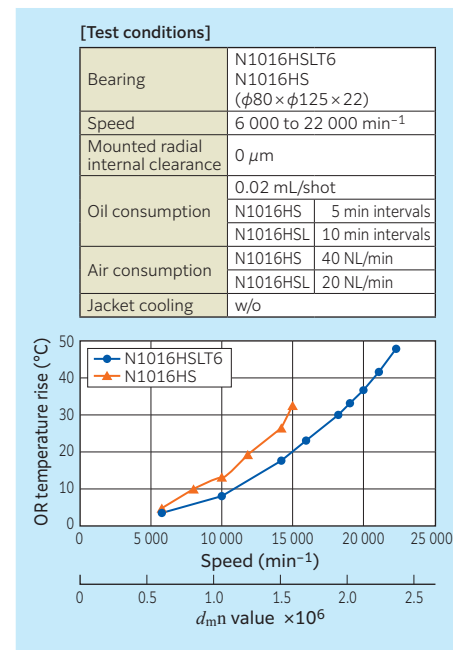


Fig. 10.16 High speed test results (without Jacket cooling)



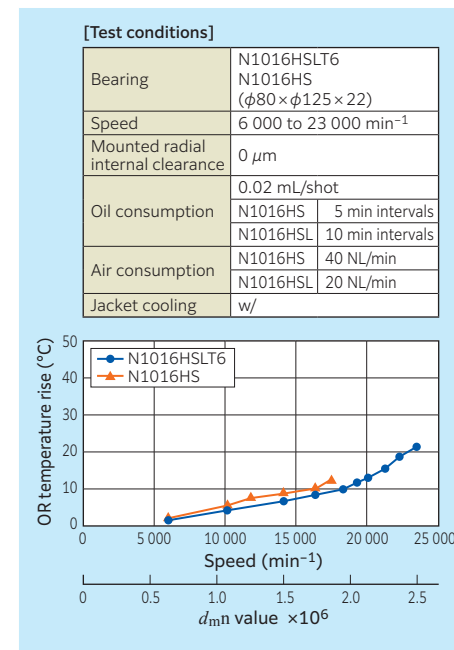


Fig. 10.17 High speed test results (with Jacket cooling)

ULTAGE Double-row cylindrical roller bearings

Dynamic equivalent radial load
 $P_r = F_r$

Static equivalent radial load
 $P_{0r} = F_r$

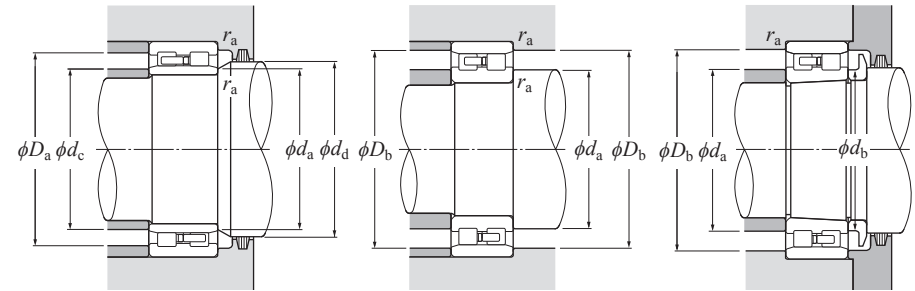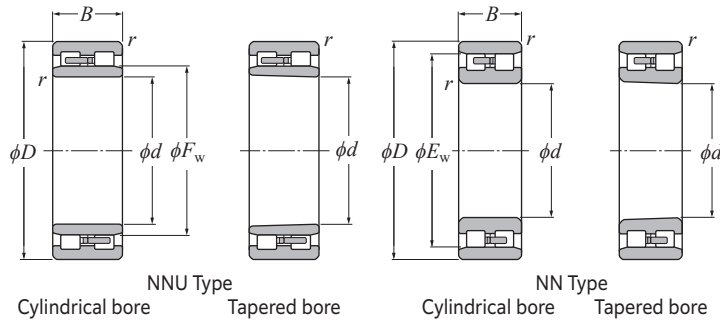

d 25–95 mm



Part number				Boundary dimensions				Basic load ratings				Allowable speed		Dimensions		Abutment and fillet dimensions								Mass				Internal free space
NNU Type		NN Type		mm				dynamic	static	dynamic	static	grease	oil	mm		mm								kg (approx.)		NN Type		cm ³
cylindrical bore	tapered bore ¹⁾	cylindrical bore	tapered bore ¹⁾	d	D	B	r _{s min} ²⁾	C _r	C _{0r}	C _r	C _{0r}	lubrication	lubrication	F _w	E _w	d _a	d _b	d _c	d _d	D _a	D _b	r _{as}	cylindrical bore	tapered bore	cylindrical bore	tapered bore	NN Type	
—	—	NN3005	NN3005K	25	47	16	0.6	28.6	30.0	2 910	3 050	19 300	23 400	—	41.3	29	30	—	—	—	43	42	0.6	—	—	0.124	0.121	3.72
—	—	NN3005HS	NN3005HSK	25	47	16	0.6	28.6	30.0	2 910	3 050	22 600	31 100	—	41.3	29	30	—	—	—	43	42	0.6	—	—	0.124	0.121	3.72
—	—	NN3006	NN3006K	30	55	19	1	34.0	37.0	3 500	3 800	16 300	19 800	—	48.5	35	36.5	—	—	—	50	49	1	—	—	0.199	0.193	6.38
—	—	NN3006HS	NN3006HSK	30	55	19	1	34.0	37.0	3 500	3 800	19 100	26 300	—	48.5	35	36.5	—	—	—	50	49	1	—	—	0.199	0.193	6.38
—	—	NN3007	NN3007K	35	62	20	1	42.0	47.5	4 250	4 850	14 300	17 300	—	55	40	41.5	—	—	—	57	56	1	—	—	0.242	0.235	8.09
—	—	NN3007HS	NN3007HSK	35	62	20	1	42.0	47.5	4 250	4 850	16 700	23 100	—	55	40	41.5	—	—	—	57	56	1	—	—	0.242	0.235	8.09
—	—	NN3008	NN3008K	40	68	21	1	48.0	55.5	4 900	5 650	12 800	15 600	—	61	45	47	—	—	—	63	62	1	—	—	0.312	0.303	9.68
—	—	NN3008HS	NN3008HSK	40	68	21	1	48.0	55.5	4 900	5 650	15 000	20 700	—	61	45	47	—	—	—	63	62	1	—	—	0.312	0.303	9.68
—	—	NN3009	NN3009K	45	75	23	1	57.5	68.5	5 850	7 000	11 600	14 000	—	67.5	50	52	—	—	—	70	69	1	—	—	0.405	0.393	13.3
—	—	NN3009HS	NN3009HSK	45	75	23	1	57.5	68.5	5 850	7 000	13 600	18 700	—	67.5	50	52	—	—	—	70	69	1	—	—	0.405	0.393	13.3
—	—	NN3010	NN3010K	50	80	23	1	59.0	72.5	6 000	7 400	10 700	13 000	—	72.5	55	57	—	—	—	75	74	1	—	—	0.433	0.419	14.6
—	—	NN3010HS	NN3010HSK	50	80	23	1	59.0	72.5	6 000	7 400	12 500	17 300	—	72.5	55	57	—	—	—	75	74	1	—	—	0.433	0.419	14.6
—	—	NN3011	NN3011K	55	90	26	1.1	77.0	96.5	7 850	9 850	9 600	11 600	—	81	61.5	63.5	—	—	—	83.5	82	1	—	—	0.651	0.631	20.5
—	—	NN3011HS	NN3011HSK	55	90	26	1.1	77.0	96.5	7 850	9 850	11 200	15 500	—	81	61.5	63.5	—	—	—	83.5	82	1	—	—	0.651	0.631	20.5
—	—	NN3012	NN3012K	60	95	26	1.1	78.5	102	8 050	10 400	9 000	10 900	—	86.1	66.5	68.5	—	—	—	88.5	87	1	—	—	0.704	0.683	21.1
—	—	NN3012HS	NN3012HSK	60	95	26	1.1	78.5	102	8 050	10 400	10 500	14 500	—	86.1	66.5	68.5	—	—	—	88.5	87	1	—	—	0.704	0.683	21.1
—	—	NN3013	NN3013K	65	100	26	1.1	83.0	111	8 450	11 400	8 400	10 200	—	91	71.5	73.5	—	—	—	93.5	92	1	—	—	0.76	0.74	22.2
—	—	NN3013HSRT6	NN3013HSRT6K	65	100	26	1.1	80.5	107	8 200	10 900	9 900	13 600	—	91	71.5	73.5	—	—	—	93.5	92	1	—	—	0.69	0.66	21.4
—	—	NN3013HSRT6	NN3013HSRT6K	65	100	26	1.1	80.5	107	8 200	10 900	12 100	21 200	—	91	71.5	73.5	—	—	—	93.5	92	1	—	—	0.69	0.66	21.4
—	—	NN3014	NN3014K	70	110	30	1.1	105	143	10 700	14 600	7 700	9 300	—	100	76.5	79	—	—	—	103.5	101	1	—	—	1.04	1.01	33.0
—	—	NN3014HSRT6	NN3014HSRT6K	70	110	30	1.1	102	137	10 400	14 000	9 000	12 400	—	100	76.5	79	—	—	—	103.5	101	1	—	—	0.99	0.96	30.4
—	—	NN3014HSRT6	NN3014HSRT6K	70	110	30	1.1	102	137	10 400	14 000	11 000	19 300	—	100	76.5	79	—	—	—	103.5	101	1	—	—	0.99	0.96	30.4
—	—	NN3015	NN3015K	75	115	30	1.1	107	149	10 900	15 200	7 300	8 900	—	105	81.5	84	—	—	—	108.5	106	1	—	—	1.14	1.11	35.0
—	—	NN3015HSRT6	NN3015HSRT6K	75	115	30	1.1	107	149	10 900	15 200	8 500	11 800	—	105	81.5	84	—	—	—	108.5	106	1	—	—	1.05	1.02	31.2
—	—	NN3015HSRT6	NN3015HSRT6K	75	115	30	1.1	107	149	10 900	15 200	10 400	18 300	—	105	81.5	84	—	—	—	108.5	106	1	—	—	1.05	1.02	31.2
—	—	NN3016	NN3016K	80	125	34	1.1	128	179	13 100	18 200	6 800	8 300	—	113	86.5	89.5	—	—	—	118.5	114	1	—	—	1.52	1.47	45.0
—	—	NN3016HSRT6	NN3016HSRT6K	80	125	34	1.1	125	172	12 700	17 500	8 000	11 000	—	113	86.5	89.5	—	—	—	118.5	114	1	—	—	1.43	1.38	43.0
—	—	NN3016HSRT6	NN3016HSRT6K	80	125	34	1.1	125	172	12 700	17 500	9 700	17 100	—	113	86.5	89.5	—	—	—	118.5	114	1	—	—	1.43	1.38	43.0
—	—	NN3017	NN3017K	85	130	34	1.1	135	194	13 800	19 800	6 500	7 900	—	118	91.5	94.5	—	—	—	123.5	119	1	—	—	1.61	1.56	48.8
—	—	NN3017HSRT6	NN3017HSRT6K	85	130	34	1.1	131	187	13 400	19 100	7 600	10 500	—	118	91.5	94.5	—	—	—	123.5	119	1	—	—	1.51	1.46	44.4
—	—	NN3017HSRT6	NN3017HSRT6K	85	130	34	1.1	131	187	13 400	19 100	9 300	16 300	—	118	91.5	94.5	—	—	—	123.5	119	1	—	—	1.51	1.46	44.4
—	—	NN3018	NN3018K	90	140	37	1.5	158	228	16 200	23 200	6 000	7 300	—	127	98	101	—	—	—	132	129	1.5	—	—	2.07	2.01	64.1
—	—	NN3018HSRT6	NN3018HSRT6K	90	140	37	1.5	158	228	16 200	23 200	7 100	9 700	—	127	98	101	—	—	—	132	129	1.5	—	—	1.97	1.91	57.6
—	—	NN3018HSRT6	NN3018HSRT6K	90	140	37	1.5	158	228	16 200	23 200	8 600	15 200	—	127	98	101	—	—	—	132	129	1.5	—	—	1.97	1.91	57.6
—	—	NN3019	NN3019K	95	145	37	1.5	162	238	16 500	24 200	5 800	7 000	—	132	103	106	—	—	—	137	134	1.5	—	—	2.17	2.10	67.0

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12). 2) Minimum allowable value for corner radius dimension r.

Remarks: A part number containing a suffix HSRT6 means an ULTAGE™ series.

Dynamic equivalent radial load
 $P_r = F_r$

Static equivalent radial load
 $P_{0r} = F_r$

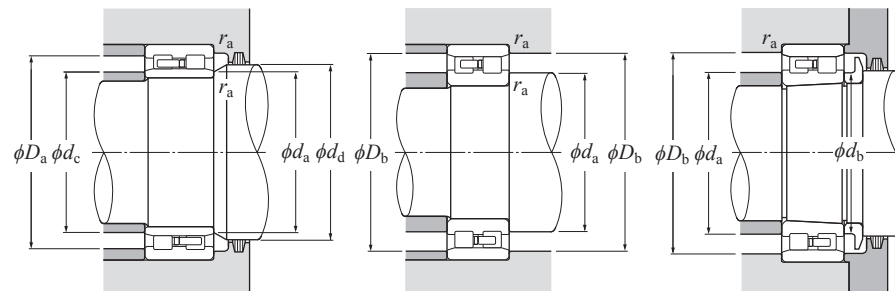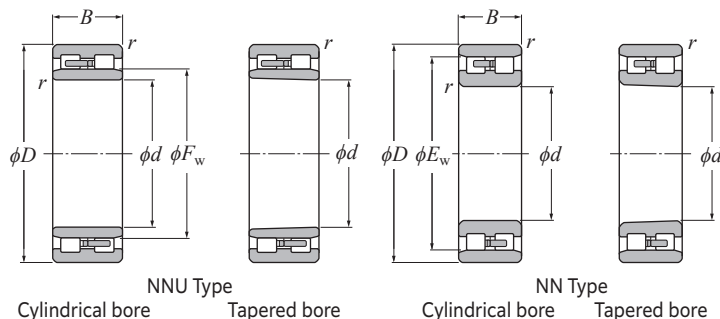

d 100–180 mm

Part number				Boundary dimensions			Basic load ratings					Allowable speed	Dimensions		Abutment and fillet dimensions							Mass				Internal free space		
NNU Type		NN Type		mm			dynamic	static	dynamic	static	min ⁻¹	mm		mm							kg (approx.)		NN Type		cm ³			
cylindrical bore	tapered bore ¹⁾	cylindrical bore	tapered bore ¹⁾	d	D	B	r _{s min} ²⁾	C _r	C _{0r}	C _r	C _{0r}	grease lubrication	oil lubrication	F _w	E _w	d _a min	d _b min	d _c max	d _d min	D _a max	D _b max	r _{as} max	NNU Type cylindrical bore	tapered bore	NN Type cylindrical bore	tapered bore	NN Type	
NNU4920	NNU4920K	NN4920	NN4920K	100	140	40	1.1	145	260	14 800	26 500	6 000	7 200	113	129	106.5	110	111	115	133.5	133.5	131	1	1.83	1.75	1.75	1.67	49.8
—	—	NN3020	NN3020K	100	150	37	1.5	170	256	17 300	26 100	5 600	6 700	—	137	108	111	—	—	—	142	139	1.5	—	—	2.26	2.19	67.5
—	—	NN3020HST6	NN3020HST6K	100	150	37	1.5	165	247	16 900	25 200	6 500	9 000	—	137	108	111	—	—	—	142	139	1.5	—	—	2.14	2.07	61.6
—	—	NN3020HSRT6	NN3020HSRT6K	100	150	37	1.5	165	247	16 900	25 200	8 000	14 000	—	137	108	111	—	—	—	142	139	1.5	—	—	2.14	2.07	61.6
NNU4921	NNU4921K	NN4921	NN4921K	105	145	40	1.1	147	268	15 000	27 400	5 700	6 900	118	134	111.5	115	116	120	138.5	138.5	136	1	1.91	1.82	1.82	1.73	50.2
—	—	NN3021	NN3021K	105	160	41	2	220	320	22 400	33 000	5 300	6 400	—	146	114	117	—	—	—	151	148	2	—	—	2.89	2.80	91.9
—	—	NN3021HST6	NN3021HST6K	105	160	41	2	220	320	22 400	33 000	6 200	8 500	—	146	114	117	—	—	—	151	148	2	—	—	2.75	2.66	82.7
—	—	NN3021HSRT6	NN3021HSRT6K	105	160	41	2	220	320	22 400	33 000	7 100	11 300	—	146	114	117	—	—	—	151	148	2	—	—	2.75	2.66	82.7
NNU4922	NNU4922K	NN4922	NN4922K	110	150	40	1.1	152	284	15 500	28 900	5 500	6 600	123	139	116.5	120	121	125	143.5	143.5	141	1	1.99	1.90	1.90	1.81	53.9
—	—	NN3022	NN3022K	110	170	45	2	254	375	25 900	38 000	5 000	6 000	—	155	119	123	—	—	—	161	157	2	—	—	3.69	3.56	115
—	—	NN3022HST6	NN3022HST6K	110	170	45	2	254	375	25 900	38 000	5 800	8 000	—	155	119	123	—	—	—	161	157	2	—	—	3.50	3.37	103
—	—	NN3022HSRT6	NN3022HSRT6K	110	170	45	2	254	375	25 900	38 000	6 700	10 600	—	155	119	123	—	—	—	161	157	2	—	—	3.50	3.37	103
NNU4924	NNU4924K	NN4924	NN4924K	120	165	45	1.1	203	360	20 700	37 000	5 000	6 000	134.5	154.5	126.5	130	133	137	158.5	158.5	156.5	1	2.75	2.62	2.63	2.51	82.5
—	—	NN3024	NN3024K	120	180	46	2	258	390	26 300	40 000	4 600	5 600	—	165	129	133	—	—	—	171	167	2	—	—	3.98	3.83	130
—	—	NN3024HST6	NN3024HST6K	120	180	46	2	251	380	25 600	38 500	5 400	7 500	—	165	129	133	—	—	—	171	167	2	—	—	3.76	3.61	117
—	—	NN3024HSRT6	NN3024HSRT6K	120	180	46	2	251	380	25 600	38 500	6 200	9 900	—	165	129	133	—	—	—	171	167	2	—	—	3.76	3.61	117
NNU4926	NNU4926K	NN4926	NN4926K	130	180	50	1.5	244	440	24 900	45 000	4 600	5 500	146	168	138	142	144	148	172	172	170	1.5	3.69	3.52	3.52	3.35	112
—	—	NN3026	NN3026K	130	200	52	2	315	475	32 000	48 500	4 200	5 100	—	182	139	143	—	—	—	191	183	2	—	—	5.92	5.71	182
—	—	NN3026HST6	NN3026HST6K	130	200	52	2	315	475	32 000	48 500	4 900	6 800	—	182	139	143	—	—	—	191	183	2	—	—	5.55	5.34	164
—	—	NN3026HSRT6	NN3026HSRT6K	130	200	52	2	315	475	32 000	48 500	5 700	9 000	—	182	139	143	—	—	—	191	183	2	—	—	5.55	5.34	164
NNU4928	NNU4928K	NN4928	NN4928K	140	190	50	1.5	251	470	25 600	48 000	4 300	5 200	156	178	148	152	154	158	182	182	180	1.5	3.94	3.76	3.76	3.58	117
—	—	NN3028	NN3028K	140	210	53	2	330	515	33 500	52 500	4 000	4 800	—	192	149	153	—	—	—	201	194	2	—	—	6.44	6.21	199
—	—	NN3028HST6	NN3028HST6K	140	210	53	2	330	515	33 500	52 500	4 700	6 400	—	192	149	153	—	—	—	201	194	2	—	—	6.11	5.91	176
—	—	NN3028HSRT6	NN3028HSRT6K	140	210	53	2	330	515	33 500	52 500	5 400	8 500	—	192	149	153	—	—	—	201	194	2	—	—	6.11	5.91	176
NNU4930	NNU4930K	NN4930	NN4930K	150	210	60	2	380	690	39 000	70 500	3 900	4 800	168.5	196.5	159	164	166	171	201	201	198.5	2	6.18	5.90	5.90	5.62	192
—	—	NN3030	NN3030K	150	225	56	2.1	370	585	38 000	60 000	3 700	4 500	—	206	161	166	—	—	—	214	208	2	—	—	7.81	7.53	237
—	—	NN3030HS	NN3030HSK	150	225	56	2.1	370	585	38 000	60 000	4 300	6 000	—	206	161	166	—	—	—	214	208	2	—	—	7.81	7.53	237
NNU4932	NNU4932K	NN4932	NN4932K	160	220	60	2	395	740	40 500	75 500	3 700	4 500	178.5	206.5	169	174	176	182	211	211	208.5	2	6.53	6.23	6.24	5.94	199
—	—	NN3032	NN3032K	160	240	60	2.1	415	660	42 000	67 500	3 500	4 200	—	219	171	176	—	—	—	229	221	2	—	—	8.92	8.59	287
—	—	NN3032HS	NN3032HSK	160	240	60	2.1	415	660	42 000	67 500	4 100	5 600	—	219	171	176	—	—	—	229	221	2	—	—	8.92	8.59	287
NNU4934	NNU4934K	NN4934	NN4934K	170	230	60	2	400	765	41 000	78 000	3 600	4 300	188.5	216.5	179	184	186	192	221	221	218.5	2	6.87	6.55	6.56	6.24	212
—	—	NN3034	NN3034K	170	260	67	2.1	490	775	49 500	79 000	3 200	3 900	—	236	181	187	—	—	—	249	238	2	—	—	12.6	12.2	379
NNU4936	NNU4936K	NN4936	NN4936K	180	250	69	2	510	965	52 000	98 500	3 200	3 800	202	234	189	195	199	205	241	241	236	2	9.90	9.46	9.45	9.01	299
—	—	NN3036	NN3036K	180	280	74	2.1	630	995	64 000	102 000	3 000	3 600	—	255	191	197	—	—	—	269	257	2	—	—	16.6	16.0	478

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12).



2) Minimum allowable value for corner radius dimension r.

Remarks: A part number containing a suffix HSRT6 means an ULTAGE™ series.

Double-row cylindrical roller bearings

Dynamic equivalent radial load
 $P_r = F_r$

Static equivalent radial load
 $P_{0r} = F_r$

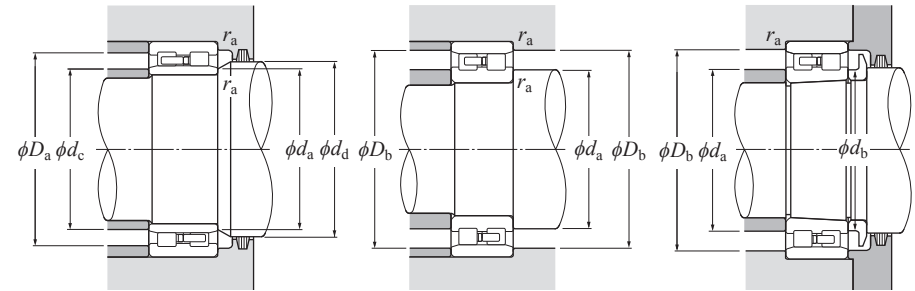
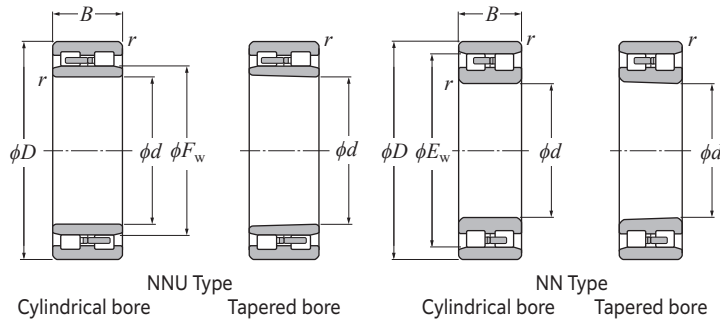


d 190–500 mm

Part number				Boundary dimensions				Basic load ratings				Allowable		Dimensions		Abutment and fillet dimensions								Mass				Internal free space cm ³
NNU Type		NN Type		mm				dynamic	static	dynamic	static	grease lubrication	oil lubrication	mm		mm								kg (approx.)		NN Type		
cylindrical bore	tapered bore ¹⁾	cylindrical bore	tapered bore ¹⁾	d	D	B	r _{s min} ²⁾	C _r	C _{0r}	C _r	C _{0r}			F _w	E _w	d _a min	d _b min	d _c max	d _d min	D _a max	D _b max	r _{as} min	r _{as} max	cylindrical bore	tapered bore	cylindrical bore	tapered bore	
NNU4938	NNU4938K	NN4938	NN4938K	190	260	69	2	525	1 030	53 500	105 000	3 000	3 600	212	244	199	205	209	215	251	251	246	2	10.4	9.94	9.93	9.47	303
—	—	NN3038	NN3038K	190	290	75	2.1	640	1 040	65 500	106 000	2 800	3 300	—	265	201	207	—	—	—	279	267	2	—	—	18.0	17.4	504
NNU4940	NNU4940K	NN4940	NN4940K	200	280	80	2.1	615	1 180	63 000	120 000	2 900	3 500	225	261	211	218	222	228	269	269	264	2	14.7	14.0	14.0	13.3	437
—	—	NN3040	NN3040K	200	310	82	2.1	725	1 170	74 000	119 000	2 600	3 100	—	282	211	218	—	—	—	299	285	2	—	—	21.6	20.8	649
NNU4944	NNU4944K	NN4944	NN4944K	220	300	80	2.1	650	1 300	66 000	132 000	2 600	3 100	245	281	231	238	242	248	289	289	284	2	15.9	15.2	15.2	14.5	485
—	—	NN3044	NN3044K	220	340	90	3	905	1 480	92 000	151 000	2 300	2 800	—	310	233	240	—	—	—	327	313	2.5	—	—	29.3	28.2	877
NNU4948	NNU4948K	NN4948	NN4948K	240	320	80	2.1	680	1 410	69 500	144 000	2 300	2 800	265	301	251	258	262	269	309	309	304	2	17.2	16.4	16.4	15.6	518
—	—	NN3048	NN3048K	240	360	92	3	945	1 600	96 500	163 000	2 200	2 600	—	330	253	261	—	—	—	347	333	2.5	—	—	32.8	31.6	973
NNU4952	NNU4952K	NN4952	NN4952K	260	360	100	2.1	1 000	2 070	102 000	211 000	2 200	2 600	292	336	271	279	288	296	349	349	339	2	29.6	28.3	28.3	27.0	850
—	—	NN3052	NN3052K	260	400	104	4	1 180	1 990	120 000	203 000	2 100	2 500	—	364	276	285	—	—	—	384	367	3	—	—	47.4	45.8	1 370
NNU4956	NNU4956K	NN4956	NN4956K	280	380	100	2.1	1 030	2 200	105 000	224 000	1 900	2 300	312	356	291	299	308	316	369	369	359	2	31.6	30.2	30.2	28.8	897
—	—	NN3056	NN3056K	280	420	106	4	1 200	2 080	122 000	212 000	1 800	2 100	—	384	296	305	—	—	—	404	387	3	—	—	51.1	49.3	1 500
NNU4960	NNU4960K	NN4960	NN4960K	300	420	118	3	1 330	2 800	136 000	285 000	1 800	2 100	339	391	313	323	335	343	407	407	394	2.5	48.6	46.4	46.4	44.2	1 360
—	—	NN3060	NN3060K	300	460	118	4	1 470	2 560	150 000	261 000	1 600	2 000	—	418	316	326	—	—	—	444	421	3	—	—	70.8	68.6	2 000
NNU4964	NNU4964K	NN4964	NN4964K	320	440	118	3	1 370	2 970	140 000	305 000	1 600	2 000	359	411	333	343	355	363	427	427	414	2.5	51.4	49.1	49.0	46.7	1 450
—	—	NN3064	NN3064K	320	480	121	4	1 500	2 670	153 000	272 000	1 500	1 800	—	438	336	346	—	—	—	464	441	3	—	—	76.2	73.5	2 200
NNU4968	NNU4968K	—	—	340	460	118	3	1 410	3 150	144 000	320 000	1 500	1 800	379	—	353	363	375	383	447	—	—	2.5	54.2	51.7	—	—	—
—	—	NN3068	NN3068K	340	520	133	5	1 800	3 200	183 000	325 000	1 500	1 800	—	473	360	371	—	—	—	500	477	4	—	—	102	98.5	2 950
NNU4972	NNU4972K	—	—	360	480	118	3	1 430	3 250	146 000	330 000	1 500	1 800	398	—	373	383	394	402	467	—	—	2.5	57.0	54.4	—	—	—
—	—	NN3072	NN3072K	360	540	134	5	1 830	3 300	187 000	340 000	1 400	1 600	—	493	380	391	—	—	—	520	497	4	—	—	107	103	3 600
NNU4976	NNU4976K	—	—	380	520	140	4	1 810	4 050	185 000	415 000	1 400	1 600	425	—	396	408	420	430	504	—	—	3	84.5	80.6	—	—	—
—	—	NN3076	NN3076K	380	560	135	5	1 870	3 450	191 000	355 000	1 300	1 500	—	512	400	411	—	—	—	540	516	4	—	—	113	109	3 340
NNU4980	NNU4980K	—	—	400	540	140	4	1 870	4 300	191 000	435 000	1 300	1 500	445	—	416	428	440	450	524	—	—	3	88.2	84.1	—	—	—
—	—	NN3080	NN3080K	400	600	148	5	2 260	4 150	230 000	420 000	1 200	1 400	—	547	420	432	—	—	—	580	551	4	—	—	146	141	4 230
NNU4984	NNU4984K	—	—	420	560	140	4	1 930	4 500	197 000	460 000	1 200	1 500	465	—	436	448	460	470	544	—	—	3	92.0	87.7	—	—	—
—	—	NN3084	NN3084K	420	620	150	5	2 300	4 300	235 000	440 000	1 100	1 400	—	567	440	452	—	—	—	600	571	4	—	—	154	148	4 520
NNU4988	NNU4988K	—	—	440	600	160	4	2 380	5 550	243 000	565 000	1 100	1 400	492	—	456	469	487	497	584	—	—	3	127	121	—	—	—
—	—	NN3088	NN3088K	440	650	157	6	2 680	5 100	274 000	520 000	1 100	1 300	—	596	464	477	—	—	—	626	601	5	—	—	178	172	5 000
NNU4992	NNU4992K	—	—	460	620	160	4	2 460	5 850	251 000	595 000	1 100	1 300	512	—	476	489	507	517	604	—	—	3	132	126	—	—	—
—	—	NN3092	NN3092K	460	680	163	6	2 830	5 350	288 000	545 000	1 000	1 200	—	622	484	498	—	—	—	656	627	5	—	—	202	195	6 030
NNU4996	NNU4996K	—	—	480	650	170	5	2 530	5 900	258 000	600 000	1 000	1 200	534	—	500	514	531	541	630	—	—	4	156	149	—	—	—
NNU49/500	NNU49/500K	—	—	500	670	170	5	2 670	6 400	272 000	650 000	1 000	1 200	556	—	520	534	551	561	650	—	—	4	162	155	—	—	—

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12).
2) Minimum allowable value for corner radius dimension r .

High speed single-row cylindrical roller bearings



Dynamic equivalent radial load
 $P_r = F_r$

Static equivalent radial load
 $P_{0r} = F_r$

d 30–80 mm



Part number ^{1) 3)}		Boundary dimensions						Basic load ratings				Allowable speed		Abutment and fillet dimensions						Mass	Internal	Part number ^{1) 3)}	
cylindrical bore	tapered bore	mm						dynamic kN	static	dynamic	static	min ⁻¹		mm						(approx.) kg	free space cm ³	cylindrical bore	tapered bore
		<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁽²⁾}	<i>r</i> _{ls min⁽²⁾}	<i>E</i> _w	<i>C</i> _τ	<i>C</i> _{0r}	<i>C</i> _τ	<i>C</i> _{0r}	grease lubrication	oil lubrication	<i>d</i> _a min	<i>D</i> _b max	min	<i>r</i> _{as} max	<i>r</i> _{las} max	cylindrical bore				
N1006HS	N1006HSK	30	55	13	1	0.6	48.5	19.1	17.6	1 950	1 790	20 500	32 100	35	50	49	1	0.6	0.143	4.33	N1006HS	N1006HSK	
N1007HS	N1007HSK	35	62	14	1	0.6	55	23.5	22.5	2 390	2 300	18 000	28 200	40	57	56	1	0.6	0.190	5.06	N1007HS	N1007HSK	
N1008HS	N1008HSK	40	68	15	1	0.6	61	26.9	26.3	2 750	2 680	16 100	25 300	45	63	62	1	0.6	0.235	7.10	N1008HS	N1008HSK	
N1009HS	N1009HSK	45	75	16	1	0.6	67.5	32.5	32.5	3 300	3 350	14 500	22 800	50	70	69	1	0.6	0.298	8.85	N1009HS	N1009HSK	
N1010HS	N1010HSK	50	80	16	1	0.6	72.5	33.0	34.5	3 400	3 550	13 400	21 100	55	75	74	1	0.6	0.323	10.8	N1010HS	N1010HSK	
N1011HS	N1011HSK	55	90	18	1.1	1	81	43.5	46.0	4 400	4 700	12 100	18 900	61.5	83.5	82	1	1	0.473	15.0	N1011HS	N1011HSK	
N1012HS	N1012HSK	60	95	18	1.1	1	86.1	44.5	48.5	4 550	4 950	11 300	17 700	66.5	88.5	87	1	1	0.505	15.3	N1012HS	N1012HSK	
N1013HS	N1013HSK	65	100	18	1.1	1	91	47.0	53.5	4 800	5 450	10 600	16 600	71.5	93.5	92	1	1	0.538	19.0	N1013HS	N1013HSK	
N1014HS	N1014HSK	70	110	20	1.1	1	100	57.5	65.5	5 850	6 700	9 700	15 200	76.5	103.5	101	1	1	0.745	22.0	N1014HS	N1014HSK	
N1015HS	N1015HSK	75	115	20	1.1	1	105	59.0	69.0	6 000	7 050	9 200	14 400	81.5	108.5	106	1	1	0.787	26.5	N1015HS	N1015HSK	
N1016HS	N1016HSK	80	125	22	1.1	1	113	70.5	82.0	7 200	8 400	8 500	13 400	86.5	118.5	114	1	1	1.05	31.1	N1016HS	N1016HSK	

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12).

2) Minimum allowable value for corner radius dimension r or r_1 .

3) N10HS differs from standard N10 in internal construction.

High speed single-row cylindrical roller bearings



Dynamic equivalent
radial load
 $P_r = F_r$

Static equivalent
radial load
 $P_{0r} = F_r$


d 85–160 mm

Part number ^{1) 3)}		Boundary dimensions						Basic load ratings				Allowable speed		Abutment and fillet dimensions						Mass	Internal	Part number ^{1) 3)}	
cylindrical bore	tapered bore	mm						dynamic kN	static	dynamic	static	grease lubrication	oil lubrication	min ⁻¹	min	mm				kg	cm ³	cylindrical bore	tapered bore
		<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{s min⁽²⁾}	<i>r</i> _{1s min⁽²⁾}	<i>E</i> _w	<i>C</i> _τ	<i>C</i> _{0r}	<i>C</i> _τ	<i>C</i> _{0r}					<i>d</i> _a min	<i>D</i> _b max	<i>r</i> _{as} min	<i>r</i> _{1as} max				
N1017HS	N1017HSK	85	130	22	1.1	1	118	72.0	86.0	7 350	8 800	8 100	12 800	91.5	123.5	119	1	1	1.10	33.4	N1017HS	N1017HSK	
N1018HS	N1018HSK	90	140	24	1.5	1.1	127	87.0	105	8 900	10 700	7 600	11 900	98	132	129	1.5	1	1.43	40.0	N1018HS	N1018HSK	
N1019HS	N1019HSK	95	145	24	1.5	1.1	132	89.0	110	9 100	11 200	7 300	11 400	103	137	134	1.5	1	1.50	46.5	N1019HS	N1019HSK	
N1020HS	N1020HSK	100	150	24	1.5	1.1	137	91.0	115	9 300	11 700	7 000	11 000	108	142	139	1.5	1	1.55	53.5	N1020HS	N1020HSK	
N1021HS	N1021HSK	105	160	26	2	1.1	146	121	149	12 300	15 200	6 600	10 400	114	151	148	2	1	1.96	56.2	N1021HS	N1021HSK	
N1022HS	N1022HSK	110	170	28	2	1.1	155	139	173	14 200	17 700	6 200	9 800	119	161	157	2	1	2.44	68.8	N1022HS	N1022HSK	
N1024HS	N1024HSK	120	180	28	2	1.1	165	142	182	14 500	18 500	5 800	9 100	129	171	167	2	1	2.61	87.5	N1024HS	N1024HSK	
N1026HS	N1026HSK	130	200	33	2	1.1	182	173	220	17 700	22 400	5 300	8 300	139	191	183	2	1	3.95	118	N1026HS	N1026HSK	
N1028HS	N1028HSK	140	210	33	2	1.1	192	182	240	18 600	24 400	5 000	7 800	149	201	194	2	1	4.19	130	N1028HS	N1028HSK	
N1030HS	N1030HSK	150	225	35	2.1	1.5	206	205	273	20 900	27 800	4 700	7 300	161	214	208	2	1.5	5.10	151	N1030HS	N1030HSK	
N1032HS	N1032HSK	160	240	38	2.1	1.5	219	228	305	23 300	31 500	4 400	6 900	171	229	221	2	1.5	6.30	172	N1032HS	N1032HSK	

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12).

2) Minimum allowable value for corner radius dimension r or r_1 .

3) N10HS differs from standard N10 in internal construction.



Cylindrical bore


Tapered bore

d 45–100 mm

Part number ¹⁾		Boundary dimensions						Basic load ratings				Allowable speed		Abutment and fillet dimensions					Internal free space	Part number ¹⁾	
cylindrical bore	tapered bore	mm						dynamic kN	static kN	dynamic kgf	static kgf	min ⁻¹		mm					cm ³	cylindrical bore	tapered bore
		d	D	B	r _{s min} ²⁾	r _{1s min} ²⁾	E _w	C _r	C _{0r}	C _r	C _{0r}	grease lubrication	oil lubrication	d _{a min}	D _{b max}	d _{b min}	r _{as max}	r _{1as max}			
N1009HSRT6	N1009HSRT6K	45	75	16	1	0.6	67.5	23.3	22.5	2 380	2 290	18 900	37 700	50	70	69	1	0.6	9.2	N1009HSRT6	N1009HSRT6K
N1011HSRT6	N1011HSRT6K	55	90	18	1.1	1	81	26.7	28.7	2 730	2 930	15 400	30 900	61.5	83.5	82	1	1	15.7	N1011HSRT6	N1011HSRT6K
N1012HSRT6	N1012HSRT6K	60	95	18	1.1	1	86.1	26.4	28.9	2 700	2 950	14 400	28 900	66.5	88.5	87	1	1	17.0	N1012HSRT6	N1012HSRT6K
N1013HSRT6	N1013HSRT6K	65	100	18	1.1	1	91	28.1	32.0	2 860	3 250	13 600	27 200	71.5	93.5	92	1	1	17.9	N1013HSRT6	N1013HSRT6K
N1014HSRT6	N1014HSRT6K	70	110	20	1.1	1	100	32.5	37.5	3 300	3 850	12 400	24 700	76.5	103.5	101	1	1	23.3	N1014HSRT6	N1014HSRT6K
N1016HSRT6	N1016HSRT6K	80	125	22	1.1	1	113	42.5	50.0	4 300	5 100	11 000	21 900	86.5	118.5	114	1	1	31.6	N1016HSRT6	N1016HSRT6K
N1018HSRT6	N1018HSRT6K	90	140	24	1.5	1.1	127	53.0	64.5	5 450	6 550	9 700	19 500	98	132	129	1.5	1	41.1	N1018HSRT6	N1018HSRT6K
N1020HSRT6	N1020HSRT6K	100	150	24	1.5	1.1	137	56.0	70.5	5 700	7 200	9 000	18 000	108	142	139	1.5	1	45.1	N1020HSRT6	N1020HSRT6K

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12).

2) Minimum allowable value for corner radius dimension r or r₁.



Dynamic equivalent radial load
 $P_r = F_r$


Static equivalent radial load
 $P_{0r} = F_r$

Cylindrical Roller Bearings

Dimension Tables

ULTAGE Eco-friendly ultra high speed single-row cylindrical roller bearings
Air-oil lubrication only

NTN



Cylindrical bore

Tapered bore

d 55–100 mm

Part number ¹⁾		Boundary dimensions						Basic load ratings				Allowable speed min ⁻¹ oil lubrication	Abutment and fillet dimensions						Part number ¹⁾	
cylindrical bore	tapered bore	mm						dynamic kN	static	dynamic kgf	static		mm						cylindrical bore	tapered bore
		<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _s min ²⁾	<i>r</i> _{1s} min ²⁾	<i>E</i> _w	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}		<i>d</i> _a min	<i>D</i> _b max	<i>r</i> _{as} max	<i>r</i> _{1as} max	<i>l</i> ³⁾ min			
N1011HSLT6	N1011HSLT6K	55	90	18	1.1	1	81	26.7	28.7	2 730	2 930	30 900	61.5	83.5	82	1	1	8.5	N1011HSLT6	N1011HSLT6K
N1012HSLT6	N1012HSLT6K	60	95	18	1.1	1	86.1	26.4	28.9	2 700	2 950	28 900	66.5	88.5	87	1	1	8.5	N1012HSLT6	N1012HSLT6K
N1013HSLT6	N1013HSLT6K	65	100	18	1.1	1	91	28.1	32.0	2 860	3 250	27 200	71.5	93.5	92	1	1	8.5	N1013HSLT6	N1013HSLT6K
N1014HSLT6	N1014HSLT6K	70	110	20	1.1	1	100	32.5	37.5	3 300	3 850	24 700	76.5	103.5	101	1	1	10	N1014HSLT6	N1014HSLT6K
N1016HSLT6	N1016HSLT6K	80	125	22	1.1	1	113	42.5	50.0	4 300	5 100	21 900	86.5	118.5	114	1	1	10	N1016HSLT6	N1016HSLT6K
N1018HSLT6	N1018HSLT6K	90	140	24	1.5	1.1	127	53.0	64.5	5 450	6 550	19 500	98	132	129	1.5	1	10	N1018HSLT6	N1018HSLT6K
N1020HSLT6	N1020HSLT6K	100	150	24	1.5	1.1	137	56.0	70.5	5 700	7 200	18 000	108	142	139	1.5	1	10	N1020HSLT6	N1020HSLT6K

1) A bearing number with suffix K indicates a tapered bore bearing (taper ratio 1/12).


2) Minimum allowable value for corner radius dimension r or r₁.

3) For the details of spacer dimensions, please contact NTN Engineering.

Cylindrical Roller Bearings

Dimension Tables

NTN




Dynamic equivalent
radial load
 $P_r = F_r$

Static equivalent
radial load
 $P_{0r} = F_r$

10.12 Taper gauge and mounted internal clearance adjustment gauge for NTN precision cylindrical roller bearings

As the need increases for machine tools of higher speed and precision, a higher degree of precision is required of machine tool bearings. For a precision bearing to exhibit its full performance, it must be installed correctly. In particular, when a tapered bore bearing is used, the corresponding taper on the shaft must be finished to a high degree of precision. **NTN** recommends the ring gauge for the tapered

Dimension table for taper gauge

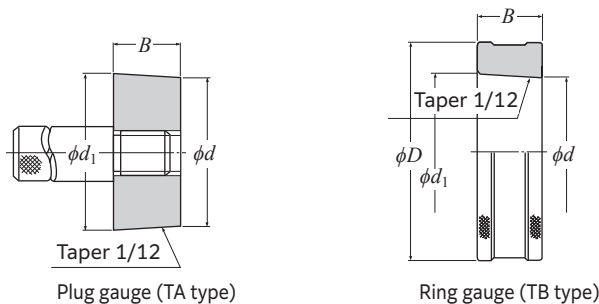


Part number		Applicable bearing		Boundary dimensions				Mass (approx.) kg	
Plug gauge	Ring gauge			mm				TA type	TB type
				d	d ₁	D	B		
TANN3006K	TBNN3006K	N1006HSK	NN3006K	30	31.583	70	19	0.5	0.2
TANN3007K	TBNN3007K	N1007HSK	NN3007K	35	36.667	75	20	0.6	0.3
TANN3008K	TBNN3008K	N1008HSK	NN3008K	40	41.750	80	21	0.7	0.3
TANN3009K	TBNN3009K	N1009HSK	NN3009K	45	46.917	85	23	0.7	0.4
TANN3010K	TBNN3010K	N1010HSK	NN3010K	50	51.917	90	23	0.8	0.5
TANN3011K	TBNN3011K	N1011HSK	NN3011K	55	57.167	95	26	0.9	0.7
TANN3012K	TBNN3012K	N1012HSK	NN3012K	60	62.167	100	26	1.0	0.8
TANN3013K	TBNN3013K	N1013HSK	NN3013K	65	67.167	105	26	1.1	0.9
TANN3014K	TBNN3014K	N1014HSK	NN3014K	70	72.500	110	30	1.3	1.3
TANN3015K	TBNN3015K	N1015HSK	NN3015K	75	77.500	115	30	1.4	1.4
TANN3016K	TBNN3016K	N1016HSK	NN3016K	80	82.833	125	34	1.9	1.7
TANN3017K	TBNN3017K	N1017HSK	NN3017K	85	87.833	130	34	2.0	1.9
TANN3018K	TBNN3018K	N1018HSK	NN3018K	90	93.083	140	37	2.6	2.4
TANN3019K	TBNN3019K	N1019HSK	NN3019K	95	98.083	145	37	2.7	2.6
TANN3020K	TBNN3020K	N1020HSK	NN3020K	100	103.083	150	37	2.8	2.8
TANN3021K	TBNN3021K	N1021HSK	NN3021K	105	108.417	160	41	3.6	3.5
TANN3022K	TBNN3022K	N1022HSK	NN3022K	110	113.750	165	45	4.1	4.0
TANN3024K	TBNN3024K	N1024HSK	NN3024K	120	123.833	170	46	4.1	4.7
TANN3026K	TBNN3026K	N1026HSK	NN3026K	130	134.333	180	52	4.8	6.4
TANN3028K	TBNN3028K	N1028HSK	NN3028K	140	144.417	190	53	5.2	7.4
TANN3030K	TBNN3030K	N1030HSK	NN3030K	150	154.667	210	56	7.2	8.4
TANN3032K	TBNN3032K	N1032HSK	NN3032K	160	165.000	220	60	8.1	10

shaft be finished to the same precision as for bearings. Note that the contact area between tapered faces should be 80 % or greater.

NTN also offers a plug gauge that permits verification of the precision of the ring gauge. Remember that the radial internal clearance of a cylindrical roller bearing needs to be correctly adjusted. Too large a radial clearance can diminish the precision of the main spindle, while too small a radial clearance can lead to abnormal heat generation and premature spalling of the bearing. To ensure adequate internal clearance, use a mounted internal clearance adjustment gauge.

Dimension table for mounted internal clearance adjustment gauge

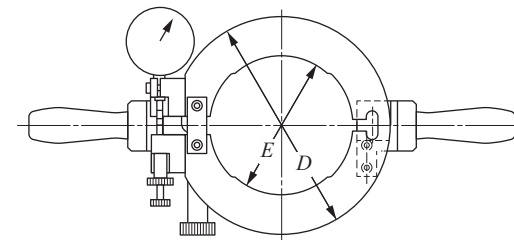

Part number		Applicable bearing		Boundary dimensions		
				mm		
				E	D	width B
SBNN3007-2	N1007HSK	NN3007K		55	101	23
SBNN3008-2	N1008HSK	NN3008K		61	107	23
SBNN3009-2	N1009HSK	NN3009K		67.5	114	23
SBNN3010-2	N1010HSK	NN3010K		72.5	120	23
SBNN3011-2	N1011HSK	NN3011K		81	131	25
SBNN3012-2	N1012HSK	NN3012K		86.1	138	25
SBNN3013-2	N1013HSK	NN3013K		91	145	25
SBNN3014-2	N1014HSK	NN3014K		100	156	28
SBNN3015-2	N1015HSK	NN3015K		105	161	28
SBNN3016-2	N1016HSK	NN3016K		113	175	30
SBNN3017-2	N1017HSK	NN3017K		118	185	30
SBNN3018-2	N1018HSK	NN3018K		127	195	33
SBNN3019-2	N1019HSK	NN3019K		132	204	33
SBNN3020-2	N1020HSK	NN3020K		137	210	33
SBNN3021-2	N1021HSK	NN3021K		146	220	36
SBNN3022-2	N1022HSK	NN3022K		155	235	40
SBNN3024-2	N1024HSK	NN3024K		165	250	40
SBNN3026-2	N1026HSK	NN3026K		182	275	45
SBNN3028-2	N1028HSK	NN3028K		192	285	45
SBNN3030-2	N1030HSK	NN3030K		206	305	50
SBNN3032-2	N1032HSK	NN3032K		219	320	50



Main Spindle Bearings

11. Angular Contact Ball Bearings for Axial Loads CONTENTS

11.1 Types and features	288
11.2 Standard cage types	289
11.3 Bearing designations	289
11.4 Accuracy of double-direction angular contact thrust ball bearings	290
11.5 Accuracy of duplex angular contact ball bearings for axial loads	291
11.6 Standard preload	292
11.7 Fits of angular contact ball bearings for axial loads	293
11.8 Recommended lubrication specifications	294
11.9 Angular contact ball bearings for axial loads HTA U type	295

Dimension Tables

Double-direction angular contact thrust ball bearings	298
Angular contact ball bearings for axial loads	302




11. Angular Contact Ball Bearings for Axial Loads

11.1 Types and features

NTN provides a range of thrust bearings for the main spindles. This includes 5629 and 5620 types for high axial rigidity (contact angle 60°) and ULTAGE™ series HTA U (A) types high speed duplex angular contact ball bearings for axial loads with optimized

internal design (contact angle 40°, 30°). These bearings are used in conjunction with NN30, NN49, or NNU49 type double-row cylindrical roller bearings (matched bearings must have the same bore and outside diameter).

Table 11.1 Types of angular contact ball bearings for axial loads

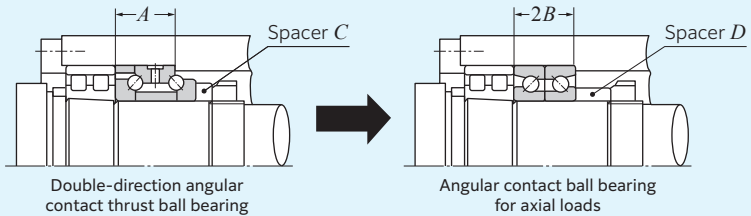	Double-direction thrust type 5629 and 5620	ULTAGE™ series duplex type HTA0U (A) DB, HTA9U (A) DB
Cross section		
Contact angle	60°	40°, 30°
Cage type	High strength machined brass	Machined phenol resin, polyamide resin, high strength machined brass
Features	These bearings can withstand axial loads in both directions. Due to a larger contact angle, rigidity in axial directions is enhanced. The structure of these bearings is not suitable for grease-lubricated vertical shaft applications.	These duplex angular contact ball bearings have similar designs as the double-direction angular contact thrust ball bearings, but differ in terms on their inner ring widths (see the diagrams below). Since their contact angles are lower at 40° and 30°, the series boast high speed capability. However, their axial rigidity is less than double-direction angular contact thrust ball bearings with 60° contact angle.
Interchangeability	A double-direction angular contact thrust ball bearing can be readily interchanged with a duplex angular contact ball bearing simply by replacing spacer C with spacer D; the dimensions of the shaft and housing remain unchanged.  Dimension A = Dimension 2B	

11.2 Standard cage types

Table 11.2 Standard cage of angular contact ball bearing for axial loads

Bearing types	Machined phenol resin cage	High strength machined brass cage
5629 5620	—	562920 to 562944 562005 to 562040
HTA9U (A) HTA0U (A)	HTA920U to HTA938U HTA010U to HTA038U ¹⁾	HTA940U to HTA964U HTA040U to HTA064U

1) Some varieties use polyamide resin cages, so please contact NTN Engineering.

Notes: Cage types may be subjected to change without notice. For details, contact NTN Engineering.

11.3 Bearing designations

562 0 20M / GN P4

Tolerance class code P5: NTN Class 5
P4: NTN Class 4
Preload code GN: Normal preload
GM: Medium preload
Bore code (refer to the dimensions tables)
without M: Tapered shaft small side diameter type (Ex.: 562020→φ100 mm bore)
with M: Tapered shaft large side diameter type (Ex.: 562020→φ103 mm bore)
Dimension series code
Bearing type

5S- HTA 0 20 U A T2 DB / GN P4L

Tolerance class code P5: NTN Class 5 P4: NTN Class 4
L: Outer ring outside diameter tolerance for axial load
Preload code GN: Normal preload
GM: Medium preload
Duplex arrangement code DB: back-to-back (double-row)
DTBT: tandem back-to-back (four-row)
Cage code No code: Standard cage
T2: Polyamide resin cage
L1: High strength machined brass cage
Contact angle code No code: 40°
A: 30°
Bearing series: ULTAGE™
Nominal bore diameter (see the dimension tables)
Dimension series code
Bearing type
Material code 5S: Material of rolling element is ceramics
No code: Bearing steel

11.4 Accuracy of double-direction angular contact thrust ball bearings

Table 11.3 Inner rings

Unit: μm

Nominal bore diameter		Deviation of mean bore diameter in a single plane				Perpendicularity of inner ring face with respect to the bore		Axial runout		Width variation		Deviation of the bearing height	
d		Δ_{dmp}				S_d		S_{ia}		V_{Bs}		Δ_{Ts}	
mm		Class 5		Class 4 ¹⁾		Class 5	Class 4	Class 5	Class 4	Class 5	Class 4	Class 5	Class 4
over	incl.	high	low	high	low	max		max		max		high	low
18	30	0	-6	0	-5	8	4	5	3	5	2.5	0	-300
30	50	0	-8	0	-6	8	4	5	3	5	3	0	-400
50	80	0	-9	0	-7	8	5	6	5	6	4	0	-500
80	120	0	-10	0	-8	9	5	6	5	7	4	0	-600
120	180	0	-13	0	-10	10	6	8	6	8	5	0	-700
180	250	0	-15	0	-12	11	7	8	6	10	6	0	-800

1) The dimensional difference Δ_{ds} of the measured bore diameter applied to Class 4 is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane. The applied to diameter series 0.

Table 11.4 Outer rings

Unit: μm

Nominal outside diameter		Deviation of mean outside diameter in a single plane		Perpendicularity of outer ring outside surface with respect to the face		Axial runout		Width variation	
D		Δ_{Dmp}		S_D		S_{ea}		V_{Cs}	
mm		Class 5	Class 4 ²⁾	Class 5	Class 4	Class 5	Class 4	Class 5	Class 4
over	incl.	high	low	max		max		max	
30	50	-30	-40	8	4	Depends on tolerance of S_{ia} in relation to d of the same bearing		5	2.5
50	80	-40	-50	8	4			6	3
80	120	-50	-60	9	5			8	4
120	150	-60	-75	10	5			8	5
150	180	-60	-75	10	5			8	5
180	250	-75	-90	11	7			10	7
250	315	-90	-105	13	8			11	7

2) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Class 4 is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane. The applied to diameter series 0.
Note: This standard is the **NTN** standard.

11.5 Accuracy of angular contact ball bearings for axial loads

Table 11.5 Inner rings

Unit: μm

Nominal bore diameter		Deviation of mean bore diameter in a single plane				Variation of bore diameter in a single plane		Variation of mean bore diameter		Perpendicularity of inner ring face with respect to the bore		Axial runout	
d		Δ_{dmp}				V_{dsp}		V_{dmp}		S_d		S_{ia}	
mm		Class 5		Class 4 ¹⁾		Diameter series 9 Class 5 max		Diameter series 0 Class 5 max		Class 5	Class 4	Class 5L	Class 4L
over	incl.	high	low	high	low	max		max		max		max	max
18	30	0	-6	0	-5	6	5	5	4	3	2.5	5	3
30	50	0	-8	0	-6	8	6	6	5	4	3	5	3
50	80	0	-9	0	-7	9	7	7	5	5	3.5	6	5
80	120	0	-10	0	-8	10	8	8	6	5	4	6	5
120	150	0	-13	0	-10	13	10	10	8	7	5	8	6
150	180	0	-13	0	-10	13	10	10	8	7	5	8	6
180	250	0	-15	0	-12	15	12	12	9	8	6	8	6
250	315	0	-18	0	-14	18	14	14	11	9	8	10	8
315	400	0	-23	0	-16	23	17	18	12	12	9	13	10

1) The dimensional difference Δ_{ds} of the measured bore diameter applied to Class 4 is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane. The applied to diameter series 0.

Overall width variation of assembled bearing		Width variation		Nominal bore diameter	
Δ_{Bs}		V_{Bs}		d	
Class 5	Class 4	Class 5	Class 4	over	incl.
high	low	max			
0	-240	5	2.5	18	30
0	-240	5	3	30	50
0	-300	6	4	50	80
0	-400	7	4	80	120
0	-500	8	5	120	150
0	-500	8	5	150	180
0	-600	10	6	180	250
0	-700	13	8	250	315
0	-800	15	10	315	400

Table 11.6 Outer rings

Unit: μm

Nominal outside diameter		Deviation of mean outside diameter in a single plane				Axial runout		Overall width variation of assembled bearing		Width variation	
D		Δ_{Dmp}				S_{ea}		Δ_{Cs}		V_{Cs}	
mm		Class 5L	Class 4L	Class 5	Class 4 ²⁾	Class 5	Class 4	All classes		Class 5	Class 4
over	incl.	high	low	high	low	max				max	
30	50	-25	-36	0	-7	8	5	Depends on tolerance of Δ_{Bs} in relation to d of the same bearing		5	2.5
50	80	-30	-43	0	-9	10	5			6	3
80	120	-36	-51	0	-10	11	6			8	4
120	150	-43	-61	0	-11	13	7			8	5
150	180	-43	-61	0	-13	14	8			8	5
180	250	-50	-70	0	-15	15	10			10	7
250	315	-56	-79	0	-18	18	10			11	7
315	400	-62	-87	0	-20	20	13			13	8
400	500	-68	-95	0	-23	23	15			15	10

2) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Class 4 is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane. The applied to diameter series 0.
Note: This standard is the **NTN** standard.

11.6 Standard preload

The initial internal clearance or initial preload must be selected with consideration of the lubricating method, maximum speed, and required axial rigidity. Although usage with normal preload (GN) within the allowable speed range is possible for both grease

lubrication and air-oil lubrication, ask **NTN Engineering** to recommend the appropriate preload if axial rigidity is required and you want to inhibit temperature rise of the main spindle. The standard preloads are summarized in **Table 11.7**.

Table 11.7 Standard preload

Unit: N {kgf}

Bore number	5629		5620		HTA9UDB		HTA9UADB		HTA0UDB		HTA0UADB		Bore number
	Normal GN	Medium GM	Normal GN	Medium GM	Normal GN	Medium GM	Normal GN	Medium GM	Normal GN	Medium GM	Normal GN	Medium GM	
05			294 {30}	685 {70}					390 {40}	685 {70}	147 {15}	294 {30}	05
06													06
07			490 {50}	785 {80}							294 {30}	590 {60}	07
08									685 {70}	1 270 {130}			08
09											490 {50}	885 {90}	09
10			980 {100}	1 670 {170}									10
11													11
12									980 {100}	1 570 {160}	590 {60}	1 470 {150}	12
13											1 960 {200}		13
14			1 470 {150}	2 450 {250}									14
15									1 470 {150}	2 450 {250}	885 {90}	1 960 {200}	15
16													16
17													17
18													18
19													19
20	1 470 {150}	2 450 {250}			980 {100}	1 670 {170}	685 {70}	1 270 {130}					20
21									1 960 {200}	3 450 {350}	980 {100}	2 450 {250}	21
22													22
24			1 960 {200}	3 250 {330}	1 270 {130}	2 450 {250}	885 {90}	1 770 {180}					24
26													26
28	1 960 {200}	2 940 {300}					980 {100}	1 960 {200}	2 940 {300}	5 400 {550}	1 470 {150}	3 450 {350}	28
30					1 960 {200}	3 450 {350}	1 270 {130}	2 450 {250}					30
32									3 900 {400}	7 350 {750}	2 450 {250}	4 900 {500}	32
34													34
36					3 450 {350}	5 900 {600}	1 770 {180}	3 450 {350}	4 900 {500}	9 300 {950}	3 450 {350}	6 850 {700}	36
38	2 450 {250}	3 900 {400}	2 450 {250}	3 900 {400}									38
40					3 900 {400}	6 850 {700}	2 450 {250}	4 900 {500}	6 850 {700}	12 700 {1 300}	3 900 {400}	7 850 {800}	40
44	2 940 {300}	4 400 {450}											44
48					4 900 {500}	8 850 {900}	3 450 {350}	6 850 {700}	8 850 {900}	15 700 {1 600}			48
52													52
56					5 900 {600}	11 800 {1 200}	4 400 {450}	8 850 {900}	10 800 {1 100}	17 700 {1 800}	5 900 {600}	11 800 {1 200}	56
60													60
64													64

11.7 Fits of angular contact ball bearings for axial loads

Fits given in **Table 11.8** are recommended for angular contact ball bearings for axial loads. To maintain high accuracy, provision of interference between the shaft and the bore of inner ring is essential. The fit of the housing and bearing should be same as that for cylindrical roller bearings, since an angular contact ball bearing is normally used together with a cylindrical roller bearing.

Table 11.8 Shaft fits

Unit: μm

Nominal bore diameter d (mm)		Fits of inner ring to shaft
over	incl.	
2.5	10	0-2T
10	18	0-2T
18	30	0-2.5T
30	50	0-3T
50	80	0-3.5T
80	120	0-4T
120	180	0-5T
180	250	0-6T

Note 1: Target the median value.

2: For high speed applications where d_{min} value exceeds 0.75×10^6 , the fit should be increased. For such an arrangement, consult **NTN Engineering**.

T: Tight (Interference) fit

■ Checking concentricity of outside diameter of outer ring after bearing

Controlling concentricity of outer ring assembly is necessary for reduction of axial runout of the main spindle. Measure and control the concentricity of outer ring shown in **Fig. 11.1** and "6. Handling of Bearings, 6.2 Mounting" in the Technical Data section.

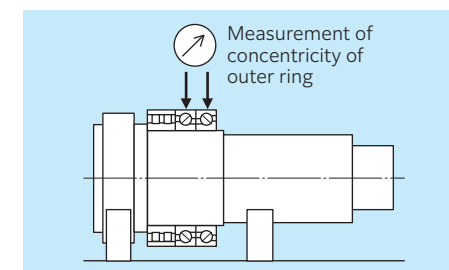


Fig. 11.1 Concentricity

11.8 Recommended lubrication specifications

Angular contact ball bearings for axial loads are usually used with grease lubrication or air-oil lubrication. Recommended specifications of the lubrication methods are described below.

■ Grease lubrication

● Recommended brand of grease

Refer to "7. Lubrication of Bearings, 7.1 Grease lubrication" in the Technical Data section.

● Recommended grease filling amount

d_{mn} value $\leq 0.65 \times 10^6$

15 to 20 % of the capacity shown in the dimensions tables

d_{mn} value $> 0.65 \times 10^6$

12 to 17 % of the capacity shown in the dimensions tables

● Recommended grease filling method

Refer to "6. Handling of Bearings, 6.1 Cleaning and filling with grease" in the Technical Data section.

Notes: High-strength machined brass cages are used for 5629/5620 types. Thus, if they are used for grease-lubricated vertical shafts, the cage on one side may hang onto the rolling elements, possibly causing seizure. Use of the HTA U type with resin cages or oil lubrication (including feeding of lubricating oil) is recommended.

■ Air-oil lubrication

● Recommended location of nozzle

Refer to "7. Lubrication of Bearings 7.2 Recommended location of nozzle for air-oil lubrication" in the Technical Data section.

● Recommended specifications of nozzle

Nozzle bore diameter : From 1 to 1.5 mm
Number of nozzles: One nozzle for each bearing, depth of nozzle bore should be three to six times of nozzle bore diameter.

● Recommended specifications of air-oil

Oil type: Spindle oil
Viscosity grade: ISO VG from 10 to 32 (32 is preferable)

Table 11.9 Air and oil amount

Bearing types	d_{mn} value ($\times 10^6$) Over Incl.	Oil amount per shot mL	Lubrication intervals min	Oil consumption mL/h	Recommended air consumption NL/min ¹⁾
HTA9U (A)	— 1.0	0.03	8	0.23	20 to 40
HTA0U (A)	1.0 1.25		5	0.36	
SS-HTA0U (A)					

1) NL/min (Normal liter/minute) ... NL means the volume of air at 0 °C and 1 atmosphere.


11.9 **ULTAGE** Angular contact ball bearings for axial loads HTA U type

The HTA U type is an angular contact ball bearing for axial loads. It maintains rigidity and load bearing capacity, and features improved high speed performance.

■ Features

1. Optimized internal design to minimize the temperature rise especially at high speed range.
2. Improved polyamide resin cage pocket design where the ball contacts to have improved lubrication performance under grease or air-oil lubrication.

■ Permissible speed range

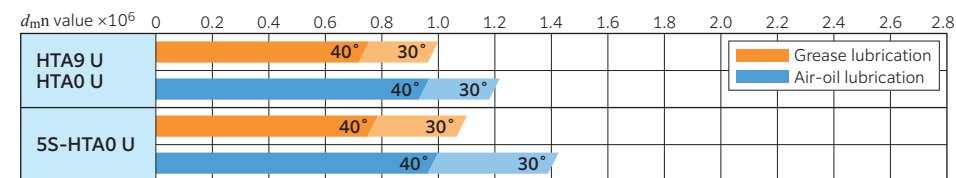

Notes) Permissible speed of each bearing (d_{mn} value) varies depending on the specifications of the machine for which the bearing is used (motor drive system, cooling system, and construction around the bearing). Consider the optimal choice referring to the above guideline, and then, contact **NTN** Engineering for technical assistance.

■ Data/Axial rigidity

Minimizes drops in axial rigidity while supporting faster speeds (see Fig. 11.3).

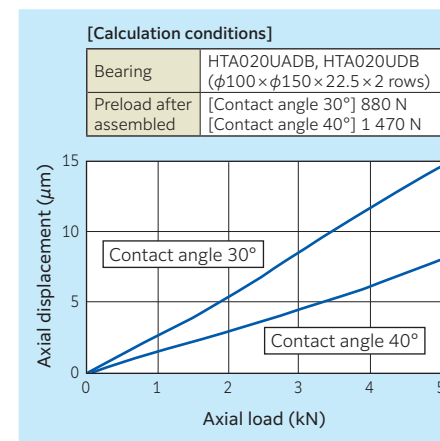


Fig. 11.3 Axial rigidity diagram

■ Bearings specification

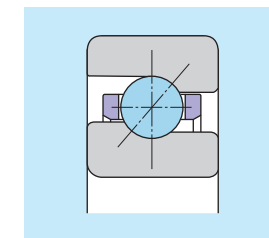


Fig. 11.2 HTA U type

■ Data/Allowable axial load

A contact angle of 30° has a larger allowable axial load, compared to a contact angle of 40° (see Fig. 11.4).

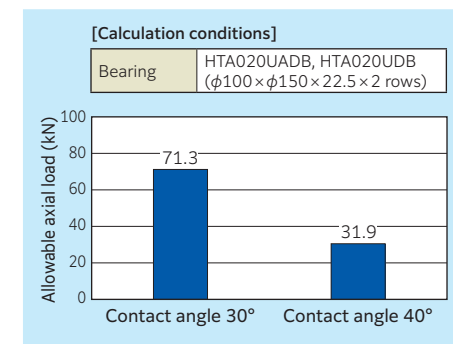


Fig. 11.4 Comparison of allowable axial load

Data/Operation test

d_{mn} value of 1.0×10^6 under grease lubrication and 1.25×10^6 under air-oil lubrication are realized by the optimized internal design (Both specification: steel ball, contact angle 30°) (see Fig. 11.5 and Fig. 11.6).

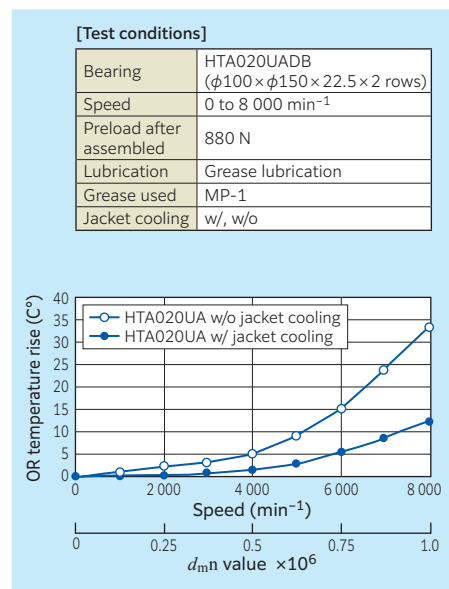


Fig. 11.5 Operation test results (contact angle 30° , grease lubrication)

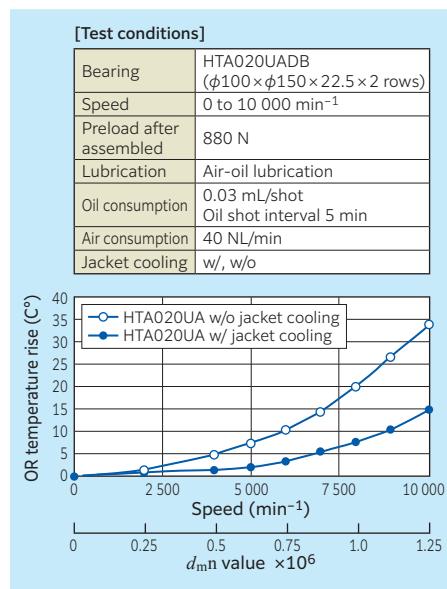


Fig. 11.6 Operation test results (contact angle 30° , air-oil lubrication)

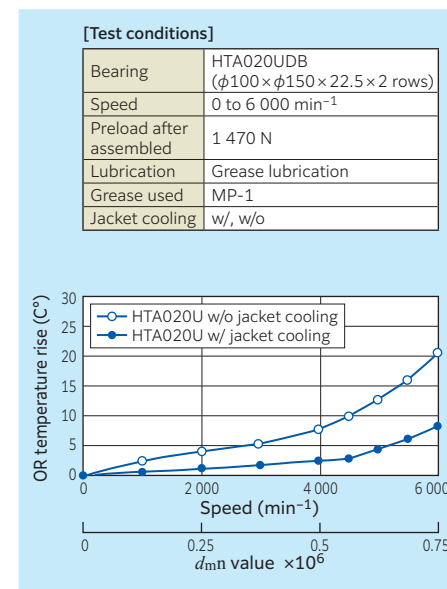


Fig. 11.7 Operation test results (contact angle 40° , grease lubrication)

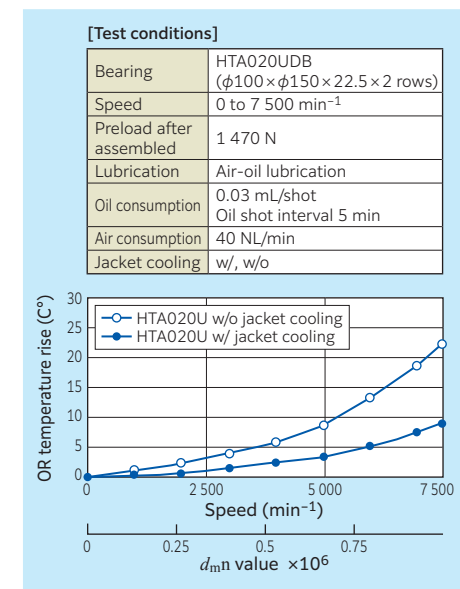



Fig. 11.8 Operation test results (contact angle 40° , air-oil lubrication)

Angular Contact Ball Bearings for Axial Loads

Dimension
Tables

NTN

Double-direction angular contact thrust ball bearings 5629 type



Contact angle 60° d 100–220 mm


Part number		Boundary dimensions								Basic load ratings				Allowable speed		Mass (approx.) kg		Reference dimensions mm		Abutment and fillet dimensions				Part number	
		mm								dynamic kN	static kgf	dynamic kgf	static kgf							mm					
small size	large size	small size	large size	<i>D</i>	<i>T</i> ₁	<i>C</i>	<i>r</i> _{s min} ¹⁾	<i>r</i> _{1s min} ¹⁾	<i>C</i> _a	<i>C</i> _{0a}	<i>C</i> _a	<i>C</i> _{0a}	grease lubrication	oil lubrication	small size	large size	<i>J</i>	<i>E</i> _w ²⁾	<i>d</i> _{a min}	<i>D</i> _{b max}	<i>r</i> _{as max}	<i>r</i> _{1as max}	small size	large size	
562920	562920M	100	104	140	48	24	1.1	0.6	58.0	179	5 900	18 200	3 200	4 200	2.04	1.8	126	129	114	134.5	1	0.6	562920	562920M	
562921	562921M	105	109	145	48	24	1.1	0.6	59.5	188	6 050	19 200	3 000	4 100	2.12	1.87	131	134	119	139.5	1	0.6	562921	562921M	
562922	562922M	110	114	150	48	24	1.1	0.6	59.5	193	6 100	19 700	2 900	3 900	2.21	1.95	136	139	124	144.5	1	0.6	562922	562922M	
562924	562924M	120	124	165	54	27	1.1	0.6	72.0	242	7 350	24 700	2 600	3 500	3.06	2.75	150	154.5	138	159.5	1	0.6	562924	562924M	
562926	562926M	130	134	180	60	30	1.5	1	83.0	284	8 450	28 900	2 400	3 200	4.11	3.7	163	168	150	173.5	1.5	1	562926	562926M	
562928	562928M	140	144	190	60	30	1.5	1	84.0	297	8 600	30 500	2 300	3 100	4.38	3.94	173	178	160	183.5	1.5	1	562928	562928M	
562930	562930M	150	155	210	72	36	2	1	118	410	12 100	41 500	2 100	2 800	6.88	6.2	190	196.5	174	202	2	1	562930	562930M	
562932	562932M	160	165	220	72	36	2	1	121	430	12 300	44 000	2 000	2 600	7.26	6.53	200	206.5	184	212	2	1	562932	562932M	
562934	562934M	170	175	230	72	36	2	1	123	450	12 500	46 000	1 900	2 500	7.64	6.88	210	216.5	194	222	2	1	562934	562934M	
562936	562936M	180	186	250	84	42	2	1	173	605	17 600	62 000	1 700	2 300	11.2	10	227	234	207	242	2	1	562936	562936M	
562938	562938M	190	196	260	84	42	2	1	174	625	17 700	63 500	1 700	2 200	11.7	10.5	237	244	217	252	2	1	562938	562938M	
562940	562940M	200	207	280	96	48	2.1	1.1	205	735	20 900	75 000	1 600	2 100	16.3	14.7	252	261	231	270	2	1	562940	562940M	
562944	562944M	220	227	300	96	48	2.1	1.1	211	795	21 500	81 000	1 400	1 900	17.7	16	272	281	251	290	2	1	562944	562944M	

1) Minimum allowable value for corner radius dimension r or r_1 .
2) Maximum circumscribed circle diameter of balls.

Angular Contact Ball Bearings for Axial Loads

Dimension
Tables

NTN




Dynamic equivalent axial load

$$P_a = F_a$$

Static equivalent axial load

$$P_{0a} = F_a$$



Dimensions of oil hole and oil groove unit: mm


Nominal outside diameter D		Oil groove width W_o	Oil hole diameter d_o
over	incl.		
140	190	8	4
190	260	12	6
260	320	14	6

Angular Contact Ball Bearings for Axial Loads

Dimension Tables

NTN

Double-direction angular contact thrust ball bearings 5620 type



Contact angle 60° d 25–200 mm


Part number		Boundary dimensions								Basic load ratings				Allowable speed		Mass (approx.)		Reference dimensions		Abutment and fillet dimensions				Part number	
small size	large size	d		mm				dynamic		static	dynamic	static	C_{0a}	grease lubrication	oil lubrication	small size	large size	J	$E_w^{(2)}$	d_a min	D_b max	r_{as} max	r_{1as} max	small size	large size
		small size	large size	D	T_1	C	$r_s \text{ min}^{(1)}$	$r_{1s} \text{ min}^{(1)}$	C_a	C_{0a}	C_a	C_{0a}													
562005	562005M	25	27	47	28	14	0.6	0.3	14.6	28.3	1 490	2 890	10 400	14 000		0.197	0.177	40	41.3	33	44	0.6	0.3	562005	562005M
562006	562006M	30	32	55	32	16	1	0.6	15.5	32.5	1 580	3 350	8 700	11 700		0.301	0.28	47	48.5	40	50.5	1	0.6	562006	562006M
562007	562007M	35	37	62	34	17	1	0.6	21.8	48.5	2 230	4 950	7 700	10 300		0.394	0.35	53	55	45.5	57.5	1	0.6	562007	562007M
562008	562008M	40	42	68	36	18	1	0.6	26.4	58.5	2 690	5 950	7 000	9 400		0.482	0.44	58.5	61	50	63.5	1	0.6	562008	562008M
562009	562009M	45	47	75	38	19	1	0.6	28.8	69.0	2 930	7 000	6 200	8 300		0.605	0.54	65	67.5	56.5	70.5	1	0.6	562009	562009M
562010	562010M	50	52	80	38	19	1	0.6	29.6	74.0	3 000	7 550	5 700	7 700		0.638	0.59	70	72.5	61.5	75.5	1	0.6	562010	562010M
562011	562011M	55	57	90	44	22	1.1	0.6	41.0	99.0	4 200	10 100	5 200	7 000		0.988	0.9	78	81	67.5	84	1	0.6	562011	562011M
562012	562012M	60	62	95	44	22	1.1	0.6	41.5	103	4 250	10 500	4 900	6 500		1.06	0.96	83	86.1	72.5	89	1	0.6	562012	562012M
562013	562013M	65	67	100	44	22	1.1	0.6	43.0	111	4 400	11 300	4 600	6 100		1.08	1	88	91	77.5	94	1	0.6	562013	562013M
562014	562014M	70	73	110	48	24	1.1	0.6	52.5	140	5 350	14 300	4 200	5 600		1.53	1.4	97	100	85	104	1	0.6	562014	562014M
562015	562015M	75	78	115	48	24	1.1	0.6	54.5	150	5 550	15 300	3 900	5 300		1.61	1.5	102	105	90	109	1	0.6	562015	562015M
562016	562016M	80	83	125	54	27	1.1	0.6	63.5	178	6 500	18 200	3 700	4 900		2.2	2	110	113	96.5	119	1	0.6	562016	562016M
562017	562017M	85	88	130	54	27	1.1	0.6	64.5	184	6 550	18 800	3 500	4 700		2.31	2.1	115	118	102	124	1	0.6	562017	562017M
562018	562018M	90	93	140	60	30	1.5	1	74.5	216	7 600	22 000	3 300	4 400		3.05	2.7	123	127	109	133.5	1.5	1	562018	562018M
562019	562019M	95	98	145	60	30	1.5	1	75.0	223	7 650	22 700	3 100	4 200		3.18	2.9	128	132	114	138.5	1.5	1	562019	562019M
562020	562020M	100	103	150	60	30	1.5	1	76.0	229	7 750	23 400	3 000	4 000		3.32	3	133	137	119	143.5	1.5	1	562020	562020M
562021	562021M	105	109	160	66	33	2	1	87.0	266	8 900	27 100	2 800	3 800		4.19	3.7	142	146	127	152	2	1	562021	562021M
562022	562022M	110	114	170	72	36	2	1	106	315	10 800	32 500	2 700	3 600		5.35	4.9	150	155	133	162	2	1	562022	562022M
562024	562024M	120	124	180	72	36	2	1	109	335	11 100	34 500	2 500	3 300		5.73	5.2	160	165	143	172	2	1	562024	562024M
562026	562026M	130	135	200	84	42	2	1	154	460	15 700	47 000	2 300	3 100		8.58	7.6	177	182	155	192	2	1	562026	562026M
562028	562028M	140	144	210	84	42	2	1	159	495	16 200	50 500	2 200	2 900		9.1	8.1	187	192	165	202	2	1	562028	562028M
562030	562030M	150	155	225	90	45	2.1	1.1	163	525	16 600	53 500	2 000	2 700		11.2	10	200	206	178	215	2	1	562030	562030M
562032	562032M	160	165	240	96	48	2.1	1.1	191	620	19 500	63 000	1 900	2 500		13.6	11.9	212	219	189	230	2	1	562032	562032M
562034	562034M	170	175	260	108	54	2.1	1.1	224	735	22 900	75 000	1 800	2 400		18.5	16.5	230	236	203	250	2	1	562034	562034M
562036	562036M	180	186	280	120	60	2.1	1.1	259	865	26 400	88 000	1 600	2 200		24.7	21.8	248	255	219	270	2	1	562036	562036M
562038	562038M	190	196	290	120	60	2.1	1.1	262	890	26 700	91 000	1 600	2 100		25.5	23	258	265	229	280	2	1	562038	562038M
562040	562040M	200	207	310	132	66	2.1	1.1	300	1 030	30 500	105 000	1 500	2 000		32.7	29.7	274	282	243	300	2	1	562040	562040M

1) Minimum allowable value for corner radius dimension r or r_1 .
2) Maximum circumscribed circle diameter of balls.

Angular Contact Ball Bearings for Axial Loads


Dimension Tables

NTN



Dynamic equivalent axial load
 $P_a = F_a$

Static equivalent axial load
 $P_{0a} = F_a$




Dimensions of oil hole and oil groove unit: mm

Nominal outside diameter D		Oil groove width W_o	Oil hole diameter d_o
over	incl.		
50	80	4.5	2
80	150	6	3
150	210	8	4
210	260	12	6
260	320	16	8

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (steel ball spec.)
HTA9UA type




Contact angle 30° d 100–320 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center	Internal free space	Mass	Reference dimensions		Abutment and fillet dimensions				Part number
	mm					dynamic	static	dynamic	static	kN	kgf	min ⁻¹	oil	mm	cm ³	kg	d ₁	D ₂	d _a	D _b	r _{as}	r _{las}	
	d	D	2B	r _s min ¹⁾	r _{ls} min ¹⁾	C _a	C _{0a}	C _a	C _{0a}	(static)	(static)	grease	lubrication	2a	Two row (approx.)	Two row (approx.)	d ₁	D ₂	d _a min	D _b max	r _{as} max	r _{las} max	
HTA920UADB	100	140	36	1.1	0.6	44.0	109	4 500	11 100	66.0	6 750	8 300	10 400	87.6	24	0.81	115.3	129.0	110	134	1	0.6	HTA920UADB
HTA921UADB	105	145	36	1.1	0.6	45.5	115	4 650	11 700	70.0	7 150	8 000	10 000	90.5	24	0.85	120.3	134.0	115	139	1	0.6	HTA921UADB
HTA922UADB	110	150	36	1.1	0.6	46.0	118	4 650	12 000	72.0	7 350	7 700	9 600	93.4	26	0.88	125.3	139.0	120	144	1	0.6	HTA922UADB
HTA924UADB	120	165	40.5	1.1	0.6	53.5	140	5 450	14 300	87.5	8 900	7 000	8 800	102.9	36	1.23	137.4	152.4	130	159	1	0.6	HTA924UADB
HTA926UADB	130	180	45	1.5	1	64.0	173	6 500	17 600	103	10 500	6 500	8 100	112.4	50	1.65	149.4	165.8	142	172.5	1.5	1	HTA926UADB
HTA928UADB	140	190	45	1.5	1	64.0	177	6 500	18 000	106	10 800	6 100	7 600	118.1	53	1.75	159.4	175.7	152	182.5	1.5	1	HTA928UADB
HTA930UADB	150	210	54	2	1	89.5	243	9 100	24 800	143	14 600	5 600	6 900	131.4	85	2.74	173.1	193.2	164	202.5	2	1	HTA930UADB
HTA932UADB	160	220	54	2	1	91.5	256	9 300	26 100	151	15 400	5 300	6 600	137.1	90	2.89	183.1	203.2	174	212.5	2	1	HTA932UADB
HTA934UADB	170	230	54	2	1	93.0	268	9 500	27 300	159	16 200	5 000	6 300	142.9	94	3.05	193.1	213.2	184	222.5	2	1	HTA934UADB
HTA936UADB	180	250	63	2	1	140	400	14 300	41 000	239	24 400	4 700	5 800	156.2	138	4.78	206.4	231.5	194	242.5	2	1	HTA936UADB
HTA938UADB	190	260	63	2	1	143	420	14 600	43 000	252	25 700	4 400	5 600	162.0	144	5.00	216.4	241.5	204	252.5	2	1	HTA938UADB
HTA940UADB	200	280	72	2.1	1.1	169	500	17 200	51 000	305	31 000	4 200	5 200	175.2	197	7.00	230.6	258.2	217	270	2	1	HTA940UADB
HTA944UADB	220	300	72	2.1	1.1	173	535	17 700	54 500	330	33 500	3 800	4 800	186.7	213	7.60	250.6	277.9	237	290	2	1	HTA944UADB
HTA948UADB	240	320	72	2.1	1.1	178	570	18 100	58 000	350	35 500	3 600	4 500	198.3	229	8.15	270.6	297.9	257	310	2	1	HTA948UADB
HTA952UADB	260	360	90	2.1	1.1	234	745	23 800	76 000	460	47 000	3 200	4 000	224.7	378	14.3	298.9	331.5	277	350	2	1	HTA952UADB
HTA956UADB	280	380	90	2.1	1.1	241	795	24 500	81 000	490	50 000	3 000	3 800	236.3	403	15.2	318.9	351.4	297	370	2	1	HTA956UADB
HTA960UADB	300	420	108	3	1.1	305	1 020	31 500	104 000	610	62 000	2 800	3 500	262.7	675	23.5	347.1	385.2	320	410	2.5	1	HTA960UADB
HTA964UADB	320	440	108	3	1.1	310	1 060	32 000	108 000	635	65 000	2 600	3 300	274.2	715	24.8	367.1	405.0	340	430	2.5	1	HTA964UADB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Axial Loads




Dynamic equivalent axial load
 $P_a = F_a$

Static equivalent axial load
 $P_{0a} = F_a$

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (steel ball spec.)
HTA9U type

NTN



Contact angle 40° d 100–320 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm 2a	Internal free space cm ³ Two row (approx.)	Mass kg Two row (approx.)	Reference dimensions		Abutment and fillet dimensions				Part number
	mm					dynamic kN	static kN	dynamic kgf	static kgf	kN	kgf	min ⁻¹	oil lubrication				d ₁	D ₂	d _a min	D _b max	r _{as} max	r _{las} max	
	d	D	2B	r _s min ¹⁾	r _{ls} min ¹⁾	C _a	C _{0a}	C _a	C _{0a}	(static)		grease lubrication											
HTA920UDB	100	140	36	1.1	0.6	52.5	121	5 350	12 300	29.3	2 990	6 300	7 900	119.1	24	0.81	115.3	129.0	110	134	1	0.6	HTA920UDB
HTA921UDB	105	145	36	1.1	0.6	53.5	128	5 500	13 000	31.0	3 150	6 000	7 600	123.3	24	0.85	120.3	134.0	115	139	1	0.6	HTA921UDB
HTA922UDB	110	150	36	1.1	0.6	54.0	131	5 500	13 400	32.0	3 250	5 800	7 300	127.5	26	0.88	125.3	139.0	120	144	1	0.6	HTA922UDB
HTA924UDB	120	165	40.5	1.1	0.6	63.0	156	6 450	15 900	39.0	4 000	5 300	6 700	140.3	36	1.23	137.4	152.3	130	159	1	0.6	HTA924UDB
HTA926UDB	130	180	45	1.5	1	75.5	193	7 700	19 600	44.5	4 550	4 800	6 100	153.1	50	1.65	149.4	165.7	142	172.5	1.5	1	HTA926UDB
HTA928UDB	140	190	45	1.5	1	75.5	197	7 700	20 100	46.0	4 700	4 500	5 800	161.5	53	1.75	159.4	175.7	152	182.5	1.5	1	HTA928UDB
HTA930UDB	150	210	54	2	1	106	270	10 800	27 600	62.5	6 350	4 200	5 300	178.7	85	2.74	173.1	193.1	164	202.5	2	1	HTA930UDB
HTA932UDB	160	220	54	2	1	108	284	11 000	29 000	65.5	6 700	3 900	5 000	187.1	90	2.89	183.1	203.1	174	212.5	2	1	HTA932UDB
HTA934UDB	170	230	54	2	1	110	298	11 200	30 500	69.0	7 050	3 800	4 800	195.5	94	3.05	193.1	213.1	184	222.5	2	1	HTA934UDB
HTA936UDB	180	250	63	2	1	166	445	16 900	45 500	104	10 600	3 500	4 400	212.7	138	4.78	206.4	231.4	194	242.5	2	1	HTA936UDB
HTA938UDB	190	260	63	2	1	170	470	17 300	48 000	110	11 200	3 300	4 200	221.1	144	5.00	216.4	241.4	204	252.5	2	1	HTA938UDB
HTA940UDB	200	280	72	2.1	1.1	200	555	20 400	56 500	134	13 700	3 100	4 000	238.3	197	7.00	230.6	258.2	217	270	2	1	HTA940UDB
HTA944UDB	220	300	72	2.1	1.1	205	595	20 900	60 500	145	14 800	2 900	3 700	255.1	213	7.60	250.6	278.2	237	290	2	1	HTA944UDB
HTA948UDB	240	320	72	2.1	1.1	210	635	21 500	64 500	155	15 800	2 700	3 400	271.8	229	8.15	270.6	298.0	257	310	2	1	HTA948UDB
HTA952UDB	260	360	90	2.1	1.1	276	830	28 200	84 500	203	20 700	2 400	3 100	306.2	378	14.3	298.9	331.5	277	350	2	1	HTA952UDB
HTA956UDB	280	380	90	2.1	1.1	284	885	29 000	90 500	218	22 200	2 300	2 900	323.0	403	15.2	318.9	351.6	297	370	2	1	HTA956UDB
HTA960UDB	300	420	108	3	1.1	365	1 130	37 000	115 000	266	27 100	2 100	2 600	357.3	675	23.5	347.1	385.0	320	410	2.5	1	HTA960UDB
HTA964UDB	320	440	108	3	1.1	370	1 180	37 500	120 000	279	28 400	2 000	2 500	374.1	715	24.8	367.1	405.0	340	430	2.5	1	HTA964UDB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (steel ball spec.)
HTA9U type

NTN



Dynamic equivalent axial load
 $P_a = F_a$


Static equivalent axial load
 $P_{0a} = F_a$

Main Spindle Bearings

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (steel ball spec.)
HTA0UA type

NTN



Contact angle 30° d 50–320 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm 2a	Internal free space cm ³ Two row (approx.)	Mass kg Two row (approx.)	Reference dimensions mm		Abutment and fillet dimensions mm				Part number
	mm					dynamic kN	static	dynamic	static	kN	kgf	min ⁻¹					d _a min	D _b max	r _{as} max	r _{1as} max			
												grease lubrication	oil lubrication										
	d	D	2B	r _{s min} ¹⁾	r _{1s min} ¹⁾	C _a	C _{0a}	C _a	C _{0a}	(static)								d ₁	D ₂				
HTA010UADB	50	80	28.5	1	0.6	27.5	48.5	2 810	4 950	23.2	2 370	15 400	19 200	52.1	9	0.24	60.7	73.2	57.5	74.0	1	0.6	HTA010UADB
HTA011UADB	55	90	33	1.1	0.6	29.8	57.5	3 050	5 850	27.7	2 820	13 800	17 200	58.6	13	0.39	68.2	80.8	65.0	84.0	1	0.6	HTA011UADB
HTA012UADB	60	95	33	1.1	0.6	31.0	63.0	3 200	6 400	30.5	3 100	12 900	16 100	61.5	13	0.41	73.2	85.8	70.0	89.0	1	0.6	HTA012UADB
HTA013UADB	65	100	33	1.1	0.6	31.5	65.0	3 250	6 650	32.0	3 250	12 100	15 200	64.4	14	0.44	78.2	90.8	75.0	94.0	1	0.6	HTA013UADB
HTA014UADB	70	110	36	1.1	0.6	38.5	82.0	3 950	8 350	40.0	4 100	11 100	13 900	70.3	18	0.61	85.3	99.1	80.0	104	1	0.6	HTA014UADB
HTA015UADB	75	115	36	1.1	0.6	41.0	91.5	4 200	9 300	45.5	4 650	10 500	13 200	73.2	19	0.65	90.3	104.1	85.0	109	1	0.6	HTA015UADB
HTA016UADB	80	125	40.5	1.1	0.6	47.0	105	4 800	10 700	52.0	5 300	9 800	12 200	79.8	26	0.88	97.4	112.5	90.0	119	1	0.6	HTA016UADB
HTA017UADB	85	130	40.5	1.1	0.6	48.0	108	4 850	11 100	54.5	5 550	9 300	11 600	82.7	28	0.93	102.4	117.5	95.0	124	1	0.6	HTA017UADB
HTA018UADB	90	140	45	1.5	1	55.5	127	5 650	13 000	63.5	6 500	8 700	10 900	89.3	38	1.22	109.4	125.8	102	132.5	1.5	1	HTA018UADB
HTA019UADB	95	145	45	1.5	1	56.0	131	5 700	13 400	66.0	6 750	8 300	10 400	92.1	39	1.27	114.4	130.8	107	137.5	1.5	1	HTA019UADB
HTA020UADB	100	150	45	1.5	1	58.0	140	5 900	14 300	71.0	7 250	8 000	10 000	95.1	39	1.34	119.5	135.9	112	142.5	1.5	1	HTA020UADB
HTA021UADB	105	160	49.5	2	1	66.5	163	6 800	16 600	82.5	8 400	7 500	9 400	101.6	49	1.74	126.5	144.2	119	152.5	2	1	HTA021UADB
HTA022UADB	110	170	54	2	1	82.5	200	8 400	20 400	100	10 200	7 100	8 900	108.3	66	2.14	133.1	153.3	124	162.5	2	1	HTA022UADB
HTA024UADB	120	180	54	2	1	83.0	206	8 450	21 000	104	10 600	6 700	8 300	114.1	67	2.32	143.3	163.4	134	172.5	2	1	HTA024UADB
HTA026UADB	130	200	63	2	1	119	293	12 200	29 900	144	14 700	6 100	7 600	127.3	108	3.39	156.4	181.6	144	192.5	2	1	HTA026UADB
HTA028UADB	140	210	63	2	1	123	315	12 600	32 000	156	15 900	5 700	7 100	133.1	114	3.60	166.4	191.5	154	202.5	2	1	HTA028UADB
HTA030UADB	150	225	67.5	2.1	1.1	127	330	12 900	34 000	169	17 200	5 300	6 700	142.6	141	4.46	178.9	204.1	167	215	2	1	HTA030UADB
HTA032UADB	160	240	72	2.1	1.1	148	390	15 100	40 000	196	20 000	5 000	6 300	152.1	168	5.40	190.6	218.3	177	230	2	1	HTA032UADB
HTA034UADB	170	260	81	2.1	1.1	170	450	17 400	46 000	226	23 000	4 700	5 800	165.3	238	7.20	204.7	235.0	187	250	2	1	HTA034UADB
HTA036UADB	180	280	90	2.1	1.1	197	530	20 100	54 000	265	27 000	4 300	5 400	178.5	285	10.6	218.9	251.7	197	270	2	1	HTA036UADB
HTA038UADB	190	290	91	2.1	1.1	200	545	20 400	55 500	275	28 000	4 200	5 200	184.3	300	11.0	228.9	261.7	207	280	2	1	HTA038UADB
HTA040UADB	200	310	99	2.1	1.1	224	610	22 800	62 500	310	31 500	3 900	4 900	197.5	436	13.8	243.0	278.5	217	300	2	1	HTA040UADB
HTA044UADB	220	340	108	3	1.1	281	775	28 600	79 000	385	39 500	3 600	4 500	216.6	550	18.1	266.3	306.9	240	330	2.5	1	HTA044UADB
HTA048UADB	240	360	108	3	1.1	289	825	29 500	84 000	415	42 500	3 300	4 200	228.1	650	18.9	286.3	326.8	260	350	2.5	1	HTA048UADB
HTA052UADB	260	400	123	4	1.5	345	1 040	35 000	106 000	520	53 500	3 000	3 800	253.0	850	28.4	314.6	360.3	283	388	3	1.5	HTA052UADB
HTA056UADB	280	420	123	4	1.5	350	1 110	36 000	113 000	565	57 500	2 900	3 600	264.6	900	30.2	334.6	380.3	303	408	3	1.5	HTA056UADB
HTA060UADB	300	460	142.5	4	1.5	400	1 330	41 000	135 000	670	68 500	2 600	3 300	291.8	1 265	43.6	362.9	414.0	323	448	3	1.5	HTA060UADB
HTA064UADB	320	480	142.5	4	1.5	405	1 360	41 500	139 000	700	71 500	2 500	3 100	303.3	1 340	45.8	382.9	433.9	343	468	3	1.5	HTA064UADB

1) Minimum allowable value for corner radius dimension r or r₁.

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (steel ball spec.)
HTA0UA type

NTN



Dynamic equivalent axial load
 $P_a = F_a$


Static equivalent axial load
 $P_{0a} = F_a$

Main Spindle Bearings

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (steel ball spec.)
HTA0U type

NTN




Contact angle 40° d 50–320 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center mm	Internal free space cm ³	Mass kg	Reference dimensions mm		Abutment and fillet dimensions mm				Part number
	mm					dynamic kN	static	dynamic	static	kN	kgf	min ⁻¹					d _a min	D _b max	r _{as} max	r _{las} max			
	d	D	2B	r _s min ⁻¹	r _{ls} min ⁻¹	C _a	C _{0a}	C _a	C _{0a}	(static)	grease lubrication	oil lubrication	2a				Two row (approx.)	Two row (approx.)	d ₁	D ₂			
HTA010UDB	50	80	28.5	1	0.6	33.0	55.5	3 350	5 650	12.3	1 250	11 500	14 600	69.2	9	0.24	60.7	73.1	57.5	74.0	1	0.6	HTA010UDB
HTA011UDB	55	90	33	1.1	0.6	35.5	64.0	3 600	6 500	14.3	1 460	10 300	13 100	77.7	13	0.39	68.2	80.7	65.0	84.0	1	0.6	HTA011UDB
HTA012UDB	60	95	33	1.1	0.6	37.0	69.5	3 800	7 100	15.7	1 600	9 700	12 300	81.9	13	0.41	73.2	85.7	70.0	89.0	1	0.6	HTA012UDB
HTA013UDB	65	100	33	1.1	0.6	37.5	72.0	3 850	7 350	16.4	1 670	9 100	11 500	86.1	14	0.44	78.2	90.7	75.0	94.0	1	0.6	HTA013UDB
HTA014UDB	70	110	36	1.1	0.6	46.0	91.0	4 700	9 300	21.5	2 190	8 300	10 600	94.0	18	0.61	85.3	99.0	80.0	104	1	0.6	HTA014UDB
HTA015UDB	75	115	36	1.1	0.6	49.0	101	5 000	10 300	24.0	2 450	7 900	10 000	98.2	19	0.65	90.3	104.0	85.0	109	1	0.6	HTA015UDB
HTA016UDB	80	125	40.5	1.1	0.6	56.0	117	5 700	11 900	28.4	2 900	7 300	9 300	106.7	26	0.88	97.4	112.4	90.0	119	1	0.6	HTA016UDB
HTA017UDB	85	130	40.5	1.1	0.6	56.5	120	5 800	12 300	29.4	3 000	7 000	8 800	110.9	28	0.93	102.4	117.4	95.0	124	1	0.6	HTA017UDB
HTA018UDB	90	140	45	1.5	1	65.5	141	6 700	14 400	32.0	3 250	6 500	8 300	119.5	38	1.22	109.4	125.7	102	132.5	1.5	1	HTA018UDB
HTA019UDB	95	145	45	1.5	1	66.5	146	6 800	14 900	33.5	3 400	6 300	7 900	123.7	39	1.27	114.4	130.7	107	137.5	1.5	1	HTA019UDB
HTA020UDB	100	150	45	1.5	1	68.5	156	7 000	15 900	35.5	3 600	6 000	7 600	128.0	39	1.34	119.5	135.8	112	142.5	1.5	1	HTA020UDB
HTA021UDB	105	160	49.5	2	1	79.0	181	8 050	18 400	42.5	4 350	5 700	7 200	136.5	49	1.74	126.5	144.1	119	152.5	2	1	HTA021UDB
HTA022UDB	110	170	54	2	1	98.0	222	10 000	22 700	50.0	5 100	5 400	6 800	145.1	66	2.14	133.1	153.2	124	162.5	2	1	HTA022UDB
HTA024UDB	120	180	54	2	1	98.5	228	10 000	23 300	52.0	5 300	5 000	6 300	153.6	67	2.32	143.3	163.3	134	172.5	2	1	HTA024UDB
HTA026UDB	130	200	63	2	1	142	325	14 400	33 000	74.0	7 550	4 500	5 800	170.8	108	3.39	156.4	181.5	144	192.5	2	1	HTA026UDB
HTA028UDB	140	210	63	2	1	146	345	14 900	35 500	79.5	8 100	4 300	5 400	179.2	114	3.60	166.4	191.4	154	202.5	2	1	HTA028UDB
HTA030UDB	150	225	67.5	2.1	1.1	150	370	15 300	37 500	85.0	8 650	4 000	5 200	191.9	141	4.46	178.9	204.0	167	215	2	1	HTA030UDB
HTA032UDB	160	240	72	2.1	1.1	176	435	17 900	44 000	103	10 500	3 800	4 800	204.7	168	5.40	190.6	218.2	177	230	2	1	HTA032UDB
HTA034UDB	170	260	81	2.1	1.1	202	500	20 600	51 000	116	11 800	3 500	4 400	221.9	238	7.20	204.7	234.9	187	250	2	1	HTA034UDB
HTA036UDB	180	280	90	2.1	1.1	234	585	23 900	60 000	140	14 300	3 300	4 100	239.1	285	10.6	218.9	251.6	197	270	2	1	HTA036UDB
HTA038UDB	190	290	91	2.1	1.1	237	605	24 100	61 500	145	14 800	3 100	4 000	247.4	300	11.0	228.9	261.6	207	280	2	1	HTA038UDB
HTA040UDB	200	310	99	2.1	1.1	265	680	27 100	69 000	159	16 200	2 900	3 700	264.6	436	13.8	243.0	278.4	217	300	2	1	HTA040UDB
HTA044UDB	220	340	108	3	1.1	335	860	34 000	87 500	201	20 500	2 700	3 400	290.3	550	18.1	266.3	306.7	240	330	2.5	1	HTA044UDB
HTA048UDB	240	360	108	3	1.1	345	915	35 000	93 000	216	22 000	2 500	3 200	307.0	650	18.9	286.3	326.6	260	350	2.5	1	HTA048UDB
HTA052UDB	260	400	123	4	1.5	405	1 160	41 500	118 000	275	28 000	2 300	2 900	339.9	850	28.4	314.6	360.1	283	388	3	1.5	HTA052UDB
HTA056UDB	280	420	123	4	1.5	420	1 230	42 500	125 000	293	29 900	2 100	2 700	356.7	900	30.2	334.6	380.1	303	408	3	1.5	HTA056UDB
HTA060UDB	300	460	142.5	4	1.5	475	1 470	48 500	150 000	355	36 000	2 000	2 500	391.7	1 265	43.6	362.9	413.7	323	448	3	1.5	HTA060UDB
HTA064UDB	320	480	142.5	4	1.5	480	1 520	49 000	155 000	365	37 000	1 900	2 400	408.5	1 340	45.8	382.9	433.7	343	468	3	1.5	HTA064UDB

1) Minimum allowable value for corner radius dimension r or r₁.

Angular Contact Ball Bearings for Axial Loads


Dynamic equivalent axial load
 $P_a = F_a$
Static equivalent axial load
 $P_{0a} = F_a$



Main Spindle Bearings

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (ceramic ball spec.)
5S-HTA0UA type




Contact angle 30° d 50–130 mm

Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center	Internal free space	Mass	Reference dimensions		Abutment and fillet dimensions				Part number
	mm					dynamic	static	dynamic	static	kN	kgf	min ⁻¹	min ⁻¹	mm	cm ³	kg	d ₁	D ₂	d _a	D _b	r _{as}	r _{las}	
	d	D	2B	r _s min ¹⁾	r _{ls} min ¹⁾	C _a	C _{0a}	C _a	C _{0a}	(static)	(static)	grease lubrication	oil lubrication	2a	Two row (approx.)	Two row (approx.)	mm	mm	min	max	max	max	
5S-HTA010UADB	50	80	28.5	1	0.6	27.5	33.5	2 810	3 400	15.7	1 600	17 300	22 200	52.1	9	0.22	60.7	73.2	57.5	74.0	1	0.6	5S-HTA010UADB
5S-HTA011UADB	55	90	33	1.1	0.6	29.8	39.5	3 050	4 050	18.6	1 900	15 500	19 900	58.6	13	0.36	68.2	80.8	65.0	84.0	1	0.6	5S-HTA011UADB
5S-HTA012UADB	60	95	33	1.1	0.6	31.0	43.5	3 200	4 450	20.5	2 090	14 500	18 600	61.5	13	0.39	73.2	85.8	70.0	89.0	1	0.6	5S-HTA012UADB
5S-HTA013UADB	65	100	33	1.1	0.6	31.5	45.0	3 250	4 600	21.6	2 200	13 600	17 500	64.4	14	0.41	78.2	90.8	75.0	94.0	1	0.6	5S-HTA013UADB
5S-HTA014UADB	70	110	36	1.1	0.6	38.5	57.0	3 950	5 800	27.2	2 770	12 500	16 000	70.3	18	0.57	85.3	99.1	80.0	104	1	0.6	5S-HTA014UADB
5S-HTA015UADB	75	115	36	1.1	0.6	41.0	63.5	4 200	6 450	30.5	3 150	11 800	15 200	73.2	19	0.60	90.3	104.1	85.0	109	1	0.6	5S-HTA015UADB
5S-HTA016UADB	80	125	40.5	1.1	0.6	47.0	73.0	4 800	7 400	35.0	3 600	11 000	14 100	79.8	26	0.83	97.4	112.5	90.0	119	1	0.6	5S-HTA016UADB
5S-HTA017UADB	85	130	40.5	1.1	0.6	48.0	75.0	4 850	7 650	36.5	3 750	10 500	13 400	82.7	28	0.87	102.4	117.5	95.0	124	1	0.6	5S-HTA017UADB
5S-HTA018UADB	90	140	45	1.5	1	55.5	88.5	5 650	9 000	43.0	4 400	9 800	12 500	89.3	38	1.15	109.4	125.8	102	132.5	1.5	1	5S-HTA018UADB
5S-HTA019UADB	95	145	45	1.5	1	56.0	91.0	5 700	9 300	44.5	4 550	9 400	12 000	92.1	39	1.20	114.4	130.8	107	137.5	1.5	1	5S-HTA019UADB
5S-HTA020UADB	100	150	45	1.5	1	58.0	97.0	5 900	9 900	48.0	4 900	9 000	11 500	95.1	39	1.26	119.5	135.9	112	142.5	1.5	1	5S-HTA020UADB
5S-HTA021UADB	105	160	49.5	2	1	66.5	113	6 800	11 500	55.5	5 650	8 500	10 900	101.6	49	1.64	126.5	144.2	119	152.5	2	1	5S-HTA021UADB
5S-HTA022UADB	110	170	54	2	1	82.5	139	8 400	14 100	67.0	6 850	8 000	10 300	108.3	66	2.00	133.1	153.3	124	162.5	2	1	5S-HTA022UADB
5S-HTA024UADB	120	180	54	2	1	83.0	143	8 450	14 500	70.0	7 150	7 500	9 600	114.1	67	2.17	143.3	163.4	134	172.5	2	1	5S-HTA024UADB
5S-HTA026UADB	130	200	63	2	1	119	203	12 200	20 700	97.0	9 900	6 800	8 700	127.3	108	3.13	156.4	181.6	144	192.5	2	1	5S-HTA026UADB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Axial Loads




Dynamic equivalent axial load
 $P_a = F_a$

Static equivalent axial load
 $P_{0a} = F_a$

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (ceramic ball spec.)
5S-HTA0U type

NTN



Contact angle 40° d 50–130 mm


Part number	Boundary dimensions					Basic load ratings				Allowable axial load		Allowable speed		Load center	Internal free space	Mass	Reference dimensions		Abutment and fillet dimensions				Part number
						dynamic	static	dynamic	static			min ⁻¹	mm						cm ³	kg	mm		
	mm					kN		kgf	kN	kgf	grease lubrication	oil lubrication	Two row (approx.)	Two row (approx.)	d _a	D _b	r _{as}	r _{las}					
	d	D	2B	r _s min ⁽¹⁾	r _{ls} min ⁽¹⁾	C _a	C _{0a}	C _a	C _{0a}	(static)			2a		d ₁	D ₂	min	max	max	max			
5S-HTA010UDB	50	80	28.5	1	0.6	33.0	38.5	3 350	3 900	14.6	1 490	12 200	15 400	69.2	9	0.22	60.7	73.1	57.5	74.0	1	0.6	5S-HTA010UDB
5S-HTA011UDB	55	90	33	1.1	0.6	35.5	44.5	3 600	4 500	17.1	1 740	10 900	13 800	77.7	13	0.36	68.2	80.7	65.0	84.0	1	0.6	5S-HTA011UDB
5S-HTA012UDB	60	95	33	1.1	0.6	37.0	48.0	3 800	4 900	18.7	1 910	10 200	12 900	81.9	13	0.39	73.2	85.7	70.0	89.0	1	0.6	5S-HTA012UDB
5S-HTA013UDB	65	100	33	1.1	0.6	37.5	50.0	3 850	5 100	19.6	2 000	9 600	12 100	86.1	14	0.41	78.2	90.7	75.0	94.0	1	0.6	5S-HTA013UDB
5S-HTA014UDB	70	110	36	1.1	0.6	46.0	63.0	4 700	6 450	25.6	2 610	8 800	11 100	94.0	18	0.57	85.3	99.0	80.0	104	1	0.6	5S-HTA014UDB
5S-HTA015UDB	75	115	36	1.1	0.6	49.0	70.5	5 000	7 150	28.7	2 930	8 300	10 500	98.2	19	0.60	90.3	104.0	85.0	109	1	0.6	5S-HTA015UDB
5S-HTA016UDB	80	125	40.5	1.1	0.6	56.0	81.0	5 700	8 250	34.0	3 450	7 700	9 800	106.7	26	0.83	97.4	112.4	90.0	119	1	0.6	5S-HTA016UDB
5S-HTA017UDB	85	130	40.5	1.1	0.6	56.5	83.5	5 800	8 500	35.0	3 600	7 300	9 300	110.9	28	0.87	102.4	117.4	95.0	124	1	0.6	5S-HTA017UDB
5S-HTA018UDB	90	140	45	1.5	1	65.5	98.0	6 700	10 000	38.0	3 900	6 900	8 700	119.5	38	1.15	109.4	125.7	102	132.5	1.5	1	5S-HTA018UDB
5S-HTA019UDB	95	145	45	1.5	1	66.5	101	6 800	10 300	39.5	4 050	6 600	8 300	123.7	39	1.20	114.4	130.7	107	137.5	1.5	1	5S-HTA019UDB
5S-HTA020UDB	100	150	45	1.5	1	68.5	108	7 000	11 000	42.5	4 300	6 300	8 000	128.0	39	1.26	119.5	135.8	112	142.5	1.5	1	5S-HTA020UDB
5S-HTA021UDB	105	160	49.5	2	1	79.0	125	8 050	12 800	50.5	5 150	6 000	7 500	136.5	49	1.64	126.5	144.1	119	152.5	2	1	5S-HTA021UDB
5S-HTA022UDB	110	170	54	2	1	98.0	154	10 000	15 700	59.5	6 100	5 600	7 100	145.1	66	2.00	133.1	153.2	124	162.5	2	1	5S-HTA022UDB
5S-HTA024UDB	120	180	54	2	1	98.5	158	10 000	16 100	61.5	6 300	5 300	6 700	153.6	67	2.17	143.3	163.3	134	172.5	2	1	5S-HTA024UDB
5S-HTA026UDB	130	200	63	2	1	142	225	14 400	23 000	88.0	9 000	4 800	6 100	170.8	108	3.13	156.4	181.5	144	192.5	2	1	5S-HTA026UDB

1) Minimum allowable value for corner radius dimension r or r_1 .

Angular Contact Ball Bearings for Axial Loads

ULTAGE Angular contact ball bearings for axial loads (ceramic ball spec.)
5S-HTA0U type

NTN



Dynamic equivalent axial load
 $P_a = F_a$

Static equivalent axial load
 $P_{0a} = F_a$

Main Spindle Bearings



Main Spindle Bearings

12. Tapered Roller Bearings CONTENTS

12.1 Load calculation	316
12.2 Bearing designation	316
12.3 Accuracy	317
12.4 Recommended fits for high-precision tapered roller bearings	317
Dimension Tables	318

12. Tapered Roller Bearings

Tapered roller bearings are designed so the tapered vertex of the raceway surfaces of the inner and outer rings and rollers converge at one point on the centerline of the bearing. Accordingly, the rollers roll on the raceway surfaces and slide along the back rib of the inner ring cone, guided by the combined force from the inner ring and outer ring raceways.

This bearing is suitable for handling a radial load, an axial load in one direction, and the combined load. Also, it has a large load capacity.

In general, pressed cages are used in tapered roller bearings. Care must be taken when designing the shaft and housing for such a bearing, because the cage protrudes from the side of the raceway surface.

12.1 Load calculation

Tapered roller bearings are generally used in pairs, so their dynamic equivalent load can be calculated according to Table 12.1.

Table 12.1 Bearing arrangement and equivalent load

Bearing arrangement	Load condition	Axial load	Equivalent radial load
DB arrangement 	$\frac{0.5F_{rI}}{Y_I} \leq \frac{0.5F_{rII}}{Y_{II}} + F_a$	$F_{aI} = \frac{0.5F_{rII}}{Y_{II}} + F_a$ $F_{aII} = \frac{0.5F_{rII}}{Y_{II}}$	$P_{rI} = XF_{rI} + Y_I \left[\frac{0.5F_{rII}}{Y_{II}} + F_a \right]$ $P_{rII} = F_{rII}$
DF arrangement 	$\frac{0.5F_{rI}}{Y_I} > \frac{0.5F_{rII}}{Y_{II}} + F_a$	$F_{aI} = \frac{0.5F_{rI}}{Y_I}$ $F_{aII} = \frac{0.5F_{rI}}{Y_I} - F_a$	$P_{rI} = F_{rI}$ $P_{rII} = XF_{rII} + Y_{II} \left[\frac{0.5F_{rI}}{Y_I} - F_a \right]$
DB arrangement 	$\frac{0.5F_{rII}}{Y_{II}} \leq \frac{0.5F_{rI}}{Y_I} + F_a$	$F_{aI} = \frac{0.5F_{rI}}{Y_I}$ $F_{aII} = \frac{0.5F_{rI}}{Y_I} + F_a$	$P_{rI} = F_{rI}$ $P_{rII} = XF_{rII} + Y_{II} \left[\frac{0.5F_{rI}}{Y_I} + F_a \right]$
DF arrangement 	$\frac{0.5F_{rII}}{Y_{II}} > \frac{0.5F_{rI}}{Y_I} + F_a$	$F_{aI} = \frac{0.5F_{rII}}{Y_{II}} - F_a$ $F_{aII} = \frac{0.5F_{rII}}{Y_{II}}$	$P_{rI} = XF_{rI} + Y_I \left[\frac{0.5F_{rII}}{Y_{II}} - F_a \right]$ $P_{rII} = F_{rII}$

Note 1: The above are valid when the bearing internal clearance and preload are zero.

2: Radial load in the opposite direction to the arrow in the above illustration are also regarded as positive.

12.2 Bearing designations

329 18 X U DB +xx P5	
329	Nominal bore diameter
18	Bearing series code
X	Internal modification code
U	Duplex arrangement code
DB	DB: Back-to-back DF: Face-to-face
+xx	Spacer width dimension
P5	Tolerance class code P5: JIS Class 5 P4: JIS Class 4

12.3 Accuracy

Table 12.2 Inner rings

Unit: μm

Nominal bore diameter d mm over incl.	Deviation of mean bore diameter in a single plane Δ_{dmp}				Variation of bore diameter in a single plane V_{dsp}		Variation of mean bore diameter V_{dmp}		Radial runout of inner ring of assembled bearing K_{ia}		Perpendicularity of inner ring face with respect to the bore S_d		Axial runout of inner ring of assembled bearing S_{ia}		Deviation of a single inner ring width Δ_{Bs}				Deviation of the actual assembled bearing width Δ_{Ts}			
	Class 5		Class 4 ¹⁾		Class 5		Class 4		Class 5		Class 4		Class 4		Class 5		Class 4		Class 5		Class 4	
	high	low	high	low	max		max		max		max		max		high	low	high	low	high	low	high	low
18 30	0	- 8	0	- 6	6	5	5	4	5	3	8	4	4		0	-200	0	-200	+200	-200	+200	-200
30 50	0	-10	0	- 8	8	6	5	5	6	4	8	4	4		0	-240	0	-240	+200	-200	+200	-200
50 80	0	-12	0	- 9	9	7	6	5	7	4	8	5	4		0	-300	0	-300	+200	-200	+200	-200
80 120	0	-15	0	-10	11	8	8	5	8	5	9	5	5		0	-400	0	-400	+200	-200	+200	-200
120 180	0	-18	—	—	14	—	9	—	11	—	10	—	—		0	-500	—	—	+350	-250	—	—
180 250	0	-22	—	—	17	—	11	—	13	—	11	—	—		0	-600	—	—	+350	-250	—	—

1) The dimensional difference Δ_{ds} of the measured bore diameter applied to Class 4 is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane.

Table 12.3 Outer rings

Unit: μm

Nominal outside diameter	Deviation of mean outside diameter in a single plane				Variation of outside diameter in a single plane		Variation of mean outside diameter		Radial runout of outer ring of assembled bearing		Perpendicularity of outer ring outside surface with respect to the face		Axial runout of outer ring of assembled bearing		Deviation of a single outer ring width	
D	Δ_{Dmp}				V_{Dsp}		V_{Dmp}		K_{ea}		S_D		S_{ea}		Δ_{Cs}	
mm over incl.	Class 5 high	Class 4 low	Class 5 high	Class 4 low	Class 5 max	Class 4 max	Class 5 max	Class 4 max	Class 5 max	Class 4 max	Class 5 max	Class 4 max	Class 5 max	Class 4 max	Class 5 high	Class 4 low
30 50	0	- 9	0	- 7	7	5	5	5	7	5	8	4	5	5	Depends on tolerance of Δ_{B_3} in relation to d of the same bearing	
50 80	0	-11	0	- 9	8	7	6	5	8	5	8	4	5	5		
80 120	0	-13	0	-10	10	8	7	5	10	6	9	5	6	6		
120 150	0	-15	0	-11	11	8	8	6	11	7	10	5	7	7		
150 180	0	-18	0	-13	14	10	9	7	13	8	10	5	8	8		
180 250	0	-20	—	—	15	—	10	—	15	—	11	—	—	—		
250 315	0	-25	—	—	19	—	13	—	18	—	13	—	—	—		

2) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Class 4 is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane.

12.4 Recommended fits for high-precision tapered roller bearings

Table 12.4 Shaft fits

Unit: μm

Nominal bore diameter <i>d</i> (mm) over incl.	Fits between inner ring and shaft	
	Fixed side	Floating side
	Targeted ¹⁾ interference	Targeted ¹⁾ interference
18 30	0- 5T	0-1T
30 50	0- 6T	0-2T
50 80	0- 7T	0-3T
80 120	0- 8T	0-4T
120 180	0-10T	0-5T
180 250	0-13T	0-6T
250 315	0-15T	0-6T
315 400	0-18T	0-8T


1) It is recommended to use the median value.
T: Tight (Interference) fit

Table 12.5 Housing fits

Unit: μm

Nominal outside diameter <i>D</i> (mm) over incl.	Fits between outer ring and housing	
	Targeted interference ¹⁾	
	3L-3T	4L-4T
30 50	3L-3T	4L-4T
50 80	3L-3T	4L-4T
80 120	3L-3T	4L-4T
120 150	5L-5T	6L-6T
150 180	5L-5T	6L-6T
180 250	5L-5T	6L-6T
250 315	7L-7T	8L-8T
315 400	8L-8T	9L-9T
400 500	9L-9T	—

1) For high precision main spindles, the tight (interference) fit side of the targeted interference is recommended for the main spindle tool side.
L: Loose fit T: Tight (Interference) fit




d 20–90 mm

Part number	ISO Dimension series	Boundary dimensions								Basic load ratings				Allowable speed		Abutment and fillet dimensions								Load center mm	Factor	Axial load factor		Internal free space cm ³	Mass kg				
		mm								dynamic kN	static	dynamic	static	grease lubrication	oil lubrication	<i>d</i> _a min	<i>d</i> _b max	<i>D</i> _a max	mm <i>D</i> _b min	<i>S</i> _a min	<i>S</i> _b min	<i>r</i> _{as} max	<i>r</i> _{las} max			<i>a</i>	<i>e</i>			<i>Y</i> ₂	<i>Y</i> ₀	(approx.)	(approx.)
		<i>d</i>	<i>D</i>	<i>T</i>	<i>B</i>	<i>C</i>	<i>r</i> _{s min¹⁾}	<i>r</i> _{ls min¹⁾}	<i>r</i> _{2s min¹⁾}	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}																				
4T-32004X	3CC	20	42	15	15	12	0.6	0.6	0.15	27.6	27.9	2 820	2 840	9 500	13 000	24.5	25	37.5	33.5	39.5	3	3	0.6	0.6	10.5	0.37	1.6	0.88	4.5	0.097			
4T-32005X	4CC	25	47	15	15	11.5	0.6	0.6	0.15	31	33.5	3 150	3 450	7 900	11 000	29.5	29.5	42.5	38.5	44.5	3	3.5	0.6	0.6	12	0.43	1.39	0.77	5.2	0.113			
4T-32006X	4CC	30	55	17	17	13	1	1	0.3	41.5	46	4 200	4 700	6 900	9 200	35.5	35.5	49.5	45.5	52.5	3	4	1	1	13.5	0.43	1.39	0.77	7.9	0.172			
4T-32007X	4CC	35	62	18	18	14	1	1	0.3	46	52.5	4 700	5 350	6 100	8 100	40.5	40.5	56.5	51.5	59.5	4	4	1	1	15.5	0.45	1.32	0.73	10.3	0.223			
4T-32008X	3CD	40	68	19	19	14.5	1	1	0.3	55.5	65.5	5 700	6 650	5 300	7 100	45.5	45.5	62.5	58	65	4	4.5	1	1	15	0.38	1.58	0.87	12.5	0.272			
4T-32009X	3CC	45	75	20	20	15.5	1	1	0.3	64	76.5	6 500	7 800	4 800	6 400	50.5	51	69.5	64	72.5	4	4.5	1	1	16.5	0.39	1.53	0.84	15.7	0.341			
32910XU	2BC	50	72	15	15	12	0.6	0.6	0.15	39.5	57	4 050	5 800	4 700	6 300	54.5	55	67.5	63.5	69	3	3	0.6	0.6	13.5	0.34	1.76	0.97	8.8	0.192			
32010XU	3CC	50	80	20	20	15.5	1	1	0.3	69.5	88	7 100	9 000	4 400	5 800	55.5	55.5	74.5	68.5	77.5	4	4.5	1	1	17.5	0.42	1.42	0.78	17.2	0.373			
32911XU	2BC	55	80	17	17	14	1	1	0.3	49.5	73.5	5 050	7 500	4 300	5 700	60.5	61	74.5	70.5	76.5	3	3	1	1	14.5	0.31	1.94	1.07	12.6	0.274			
4T-32011X	3CC	55	90	23	23	17.5	1.5	1.5	0.6	89	118	9 100	12 000	4 000	5 400	63.5	63	81.5	77.5	87	4	5.5	1.5	1.5	20	0.41	1.48	0.81	25.8	0.56			
32912XA ²⁾		60	85	17	17	14	1	1	0.3	56.5	83	5 750	8 450	4 000	5 300	65.5	66	79.5	76.5	82.5	3	3	1	1	15.5	0.33	1.8	0.99	12.9	0.281			
32012XU	4CC	60	95	23	23	17.5	1.5	1.5	0.6	91	123	9 250	12 500	3 700	4 900	68.5	67.5	86.5	81.5	91.5	4	5.5	1.5	1.5	21	0.43	1.39	0.77	27.4	0.596			
32913XU	2BC	65	90	17	17	14	1	1	0.3	53.5	85	5 450	8 700	3 700	4 900	70.5	70.5	84.5	80	86	3	3	1	1	16.5	0.35	1.7	0.93	14.5	0.315			
32013XU	4CC	65	100	23	23	17.5	1.5	1.5	0.6	92	128	9 400	13 000	3 400	4 600	73.5	72.5	91.5	86	97	4	5.5	1.5	1.5	22.5	0.46	1.31	0.72	29	0.631			
32914XU	2BC	70	100	20	20	16	1	1	0.3	76	110	7 750	11 200	3 400	4 600	75.5	76.5	94.5	90	96.5	4	4	1	1	18	0.32	1.9	1.05	21.9	0.475			
32014XU	4CC	70	110	25	25	19	1.5	1.5	0.6	116	160	11 800	16 400	3 200	4 200	78.5	78	101.5	94.5	105.5	5	6	1.5	1.5	24	0.43	1.38	0.76	39.7	0.863			
32915XU	2BC	75	105	20	20	16	1	1	0.3	77	114	7 850	11 600	3 200	4 300	80.5	81	99.5	94	101	4	4	1	1	19	0.33	1.8	0.99	23.4	0.508			
32015XU	4CC	75	115	25	25	19	1.5	1.5	0.6	118	167	12 000	17 000	3 000	4 000	83.5	83	106.5	99.5	111	5	6	1.5	1.5	25.5	0.46	1.31	0.72	42	0.912			
32916XU	2BC	80	110	20	20	16	1	1	0.3	79.5	121	8 150	12 400	3 000	4 000	85.5	86	104.5	99	106.5	4	4	1	1	20	0.35	1.71	0.94	24.8	0.54			
32016XU	3CC	80	125	29	29	22	1.5	1.5	0.6	154	216	15 700	22 000	2 800	3 700	88.5	89	116.5	108.5	120.5	6	7	1.5	1.5	27	0.42	1.42	0.78	58.9	1.28			
32917XU	2BC	85	120	23	23	18	1.5	1.5	0.6	104	157	10 600	16 100	2 800	3 800	93.5	92	111.5	107.5	115.5	4	5	1.5	1.5	21	0.33	1.83	1.01	35.6	0.773			
32017XU	4CC	85	130	29	29	22	1.5	1.5	0.6	157	224	16 000	22 900	2 600	3 500	93.5	93.5	121.5	113	126	6	7	1.5	1.5	28.5	0.44	1.36	0.75	61.6	1.34			
32918XU	2BC	90	125	23	23	18	1.5	1.5	0.6	108	168	11 000	17 100	2 700	3 600	98.5	97	116.5	112.5	120.5	4	5	1.5	1.5	22	0.34	1.75	0.96	37.5	0.815			
32018XU	3CC	90	140	32	32	24	2	1.5	0.6	187	270	19 100	27 600	2 500	3 300	100	100	131.5	121	134.5	6	8	2	1.5	30	0.42	1.42	0.78	81.9	1.78			

1) Minimum allowable value for corner radius dimension *r*, *r*₁ or *r*₂.

2) This bearing does not incorporate the subunit dimensions.



Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$


$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
<i>X</i>	<i>Y</i>	<i>X</i>	<i>Y</i>
1	0	0.4	<i>Y</i> ₂

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

Note that when $P_{0r} < F_r$, $P_{0r} = F_r$.


The values for *e*, *Y*₂ and *Y*₀ are given in the table below.



d 95–190 mm

Part number	ISO Dimension series	Boundary dimensions								Basic load ratings				Allowable speed		Abutment and fillet dimensions										Load center mm	Factor	Axial load factor		Internal free space cm ³	Mass kg																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
		mm								dynamic kN	static	dynamic	static	grease lubrication	oil lubrication	<i>d</i> _a min	<i>d</i> _b max	<i>D</i> _a max	<i>D</i> _b min	<i>S</i> _a min	<i>S</i> _b min	<i>r</i> _{as} max	<i>r</i> _{las} max	<i>Y</i> ₂	<i>Y</i> ₀																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
		<i>d</i>	<i>D</i>	<i>T</i>	<i>B</i>	<i>C</i>	<i>r</i> _s mm ¹⁾	<i>r</i> _{ls} mm ¹⁾	<i>r</i> _{2s} mm ¹⁾	<i>C</i> _r	<i>C</i> _{0r}	<i>C</i> _r	<i>C</i> _{0r}																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																</

1) Minimum allowable value for corner radius dimension r, r₁ or r₂.
2) This bearing does not incorporate the subunit dimensions.



Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y ₂

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

Note that when $P_{0r} < F_r$, $P_{0r} = F_r$.
The values for e, Y₂ and Y₀ are given in the table below.



Ball Screw Support Bearings

13. Ball Screw Support Bearings CONTENTS

13.1	Angular contact thrust ball bearings BST	324
13.2	Double-row thrust angular contact ball bearing unit BSTU	330
13.3	Angular contact ball bearings HT	332
13.4	Needle roller bearings with double-direction thrust needle roller bearings AXN	332
	Needle roller bearings with double-direction thrust cylindrical roller bearings ARN	332
13.5	Bearing designations	333
13.6	Bearing accuracy	334
13.7	Standard preload and axial rigidity	340
13.8	Proper control of preload (BST type)	341
13.9	Shaft and housing fits	342
13.10	Recommended lubrication specifications	342
13.11	Starting torque of BST type	343
13.12	Applications	344

Dimension Tables

Angular contact thrust ball bearings	
BST and BST LXL types	346
2A-BST and 2A-BST LXL types	348
Double-row thrust angular contact ball bearing unit	
BSTU LLX type	352
Angular contact ball bearings HT type	356
Needle roller bearings with double-direction thrust needle roller bearings	
AXN type	358
Needle roller bearings with double-direction thrust cylindrical roller bearings	
ARN type	360

13. Ball Screw Support Bearings

NTN ball screw support bearings are dedicated bearings with optimized structures and function to support ball screws.

These bearings are categorized as shown in Table 13.1.

Table 13.1 Bearing types

Type code	Notes	Bore diameter (mm)
BST 2A-BST	Open type angular contact thrust ball bearing with 60° contact angle, generally used with grease lubrication	φ17–φ60
BST LXL/L588 2A-BST LXL/L588	Grease-lubricated sealed angular contact ball bearing with 60° contact angle	φ17–φ60
BSTU LLX/L588	Grease-lubricated sealed double-row thrust angular contact ball bearing unit with 60° contact angle	φ20–φ100
HT	Angular contact ball bearing with 30° contact angle, generally used with grease lubrication	φ6–φ40
AXN	Needle roller bearing with double-direction thrust needle roller bearing, generally used with oil lubrication	φ20–φ50
ARN	Needle roller bearing with double-direction thrust cylindrical roller bearing, generally used with oil lubrication	φ20–φ70

13.1 **ULTAGE** Angular contact thrust ball bearings BST-1B (LXL/L588), 2A-BST-1B (LXL/L588)

The BST type incorporates the maximum possible number of small balls (compared with those of a standard bearing), has thicker inner and outer rings, and a larger contact angle of 60°. Additionally, since balls are used as the rolling elements, the starting torque of a angular contact thrust ball bearing is less than that of a roller bearing.

Open (BST and 2A-BST type) and light-contact seals (BST LXL and 2A-BST LXL type) are available and resin cages are standard.

The side faces of the bearing are flush ground to provide the same stand out for both the front and back faces. Therefore, bearings with the same bearing number can be freely combined into DB, DBT and DTBT combinations, etc. (see Fig. 13.2).

Every single bearing is machined to the same stand out so that when any arrangement is installed on a ball screw the unit has optimal preload. For this reason, no time-consuming preload adjustment (adjustment with shims or tightening and loosening while measuring the starting torque) is necessary.

■ Features 2A-BST-1B (LXL/L588)

1. Unique heat treatment greatly improves resistance against rolling contact fatigue, leading to longer service life (approximately two times that of the conventional type).
2. Both sides are sealed to enhance contamination resistance and to preserve the grease (Light-contact seal type).
3. Urea based special grease of long life is used (Light-contact seal type).
4. The combination of a unique heat treatment and special grease reduces fretting (by 80 % or more for sliding mode, 90 % or more for rolling mode, compared to the conventional type) (Light-contact seal type).
5. Pre-greased bearings eliminate the need for further grease packing and allow easier handling (Light-contact seal type).

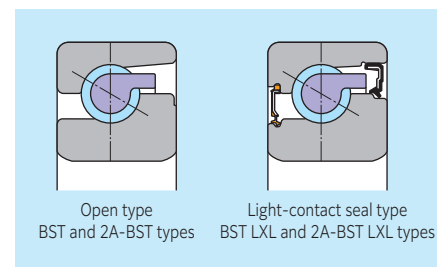


Fig. 13.1


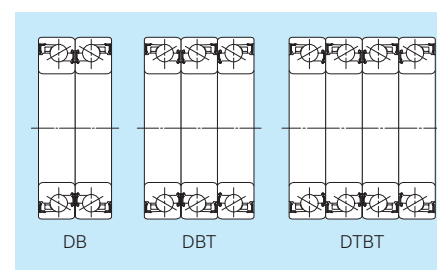


Fig. 13.2 Bearing arrangement

■ Easy handling

BST LXL and 2A-BST LXL types of grease-lubricated sealed angular contact ball bearings eliminate the need for grease filling because they have been packed with grease in advance. You need to only wipe away rust preventive oil before use. Seals in different colors are used for the front and back sides.

The front side (black) and back side (orange) can be identified by the color of a seal, and you can easily check configuration during assembly.

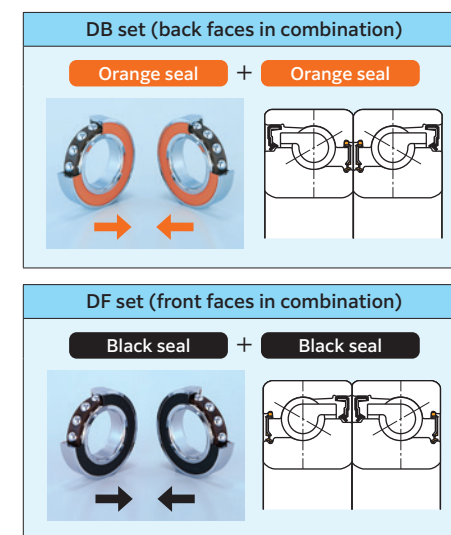

■ Performance tests

2A-BST-1B (LXL/L588) type bearings combine surface modification with urea based special grease to improve the bearing life and resistance to fretting.

(1) Fretting resistance test (sliding)

Resistance to fretting while sliding is tested by the fretting resistance test. A conceptual drawing of the test is shown in Fig. 13.3, and the test conditions are shown in Table 13.2. In this test, a fixed ball is pushed against a plate, and reciprocated for a fixed period. The volume of ball and plate wear depth are checked after testing as shown in Fig. 13.4.

Due to the combination of a unique heat treatment and a urea based special grease (light-contact seal type), amount of wear is reduced to 1/5 or less compared to the conventional type consisting of standard SUJ2 plate material and lithium based general purpose grease.

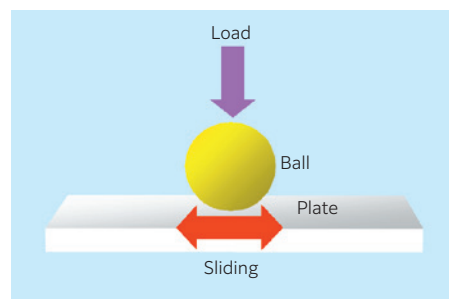


Fig. 13.3 Fretting resistance test (sliding)

Table 13.2 Test conditions

Specification		Conventional type	ULTAGE™
Material/ Heat treatment	Plate	SUJ2/Standard	SUJ2/Special
	Ball	SUJ2/Standard	
Lubrication	Grease	Lithium based general purpose	Urea based special
Load		98 N	
Max. contact surface pressure		2 560 MPa	
Loading cycle (Time)		8.6 × 10 ⁵ cycle (8 h)	
Sliding cycle		30 Hz	
Amplitude		0.47 mm	
Temperature		Room temperature	

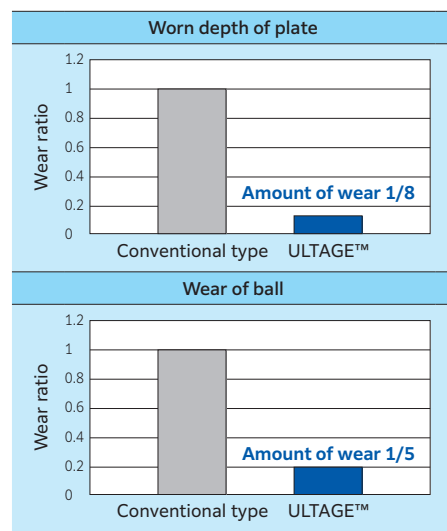


Fig. 13.4 Ratio of fretting corrosion in sliding mode

(2) Fretting resistance test (rolling)

Resistance against fretting while rolling is tested in the rotating and oscillating type fretting corrosion test. A conceptual drawing of the test is shown in Fig. 13.5, and the test conditions are shown in Table 13.3. In this test, a housing raceway washer is fixed, and the shaft raceway washer oscillates. The decrease in the weight of the bearing raceway washer after the test is shown in Fig. 13.6.

Due to the combination of a unique heat treatment and a urea based special grease (light-contact seal type), the amount of wear is reduced to 1/10 or less compared to the conventional type consisting of standard SUJ2 steel rings and lithium based general purpose grease.

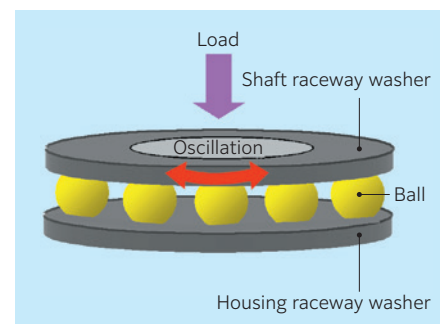


Fig. 13.5 Fretting resistance test (rolling)

Table 13.3 Test conditions

Specification		Conventional type	ULTAGE™
Bearing		Thrust ball bearing 51204 (φ20 × φ40 × 14)	
Material/ Heat treatment	Raceway washer	SUJ2/Standard	SUJ2/Special
	Ball	SUJ2/Standard	
Lubrication	Grease	Lithium based general purpose	Urea based special
Load		2.5 kN	
Max. contact surface pressure		1 700 MPa	
Test time		8 h	
Oscillating cycle		30 Hz	
Oscillating angle		12°	
Temperature		Room temperature	

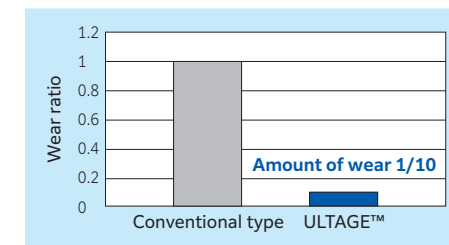


Fig. 13.6 Ratio of fretting corrosion while rolling

(3) Rolling contact fatigue life test

Resistance to rolling contact fatigue is improved as a result of a special heat treatment, leading to a longer service life compared to the standard heat-treated type model in both clean and contaminated oil (see Fig. 13.7).

Table 13.4 Test conditions

Specification		Conventional type	ULTAGE™
Bearing		Deep groove ball bearing 6206 ($\phi 30 \times \phi 62 \times 16$)	
Material/Heat treatment	Raceway ring	SUJ2/Standard	SUJ2/Special
	Ball	SUJ2/Standard	
Lubrication	Oil	Turbine oil ISO VG56	
Radial load		6.86 kN	
Speed		2 000 min ⁻¹	
Atmosphere temperature		60 °C	

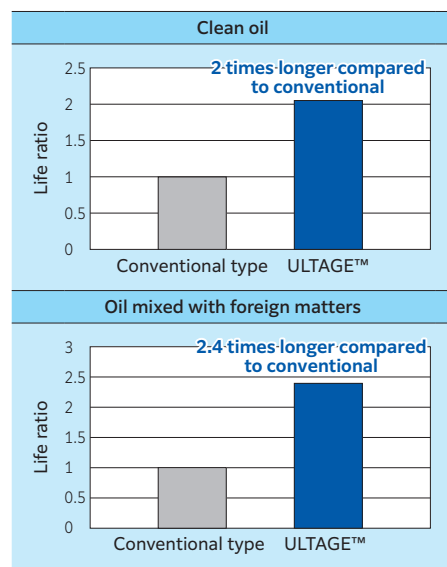


Fig. 13.7 Effect of special heat treatment on rolling contact fatigue life

(4) Grease life test

Service life of the grease has been dramatically extended compared to lithium based general purpose grease (see Fig. 13.8).

Table 13.5 Test conditions

Specification		Conventional type	ULTAGE™
Bearing		Deep groove ball bearing TS3-6204ZZC3 ($\phi 20 \times \phi 47 \times 14$)	
Lubrication	Grease	Lithium based general purpose	Urea based special
Radial load		67 N	
Axial load		67 N	
Speed		10 000 min ⁻¹	
Atmosphere temperature		150 °C	

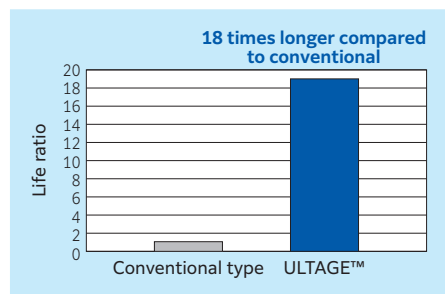


Fig. 13.8 Grease life ratio

(5) Grease leakage test

Light-contact type seals eliminate grease leakage from the bearing (see Fig. 13.9).

Table 13.6 Test conditions

Specification		ULTAGE™
Bearing		Thrust angular contact ball bearing 2A-BST40X72-1BLXLD4/L588 ($\phi 40 \times \phi 72 \times 15$)
Lubrication	Grease	Urea based special
Axial load		3.9 kN
Speed		1 000, 2 000, 3 000 min ⁻¹ running for two hours for each step
Atmosphere temperature		Room temperature

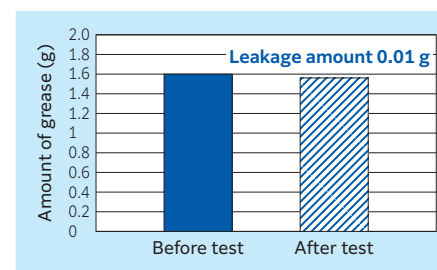


Fig. 13.9 Grease leakage

13.2 **ULTAGE** Double-row thrust angular contact ball bearing unit BSTU

The BSTU type is ball screw support bearing unit with two inner rings and one outer ring, in a back-to-back duplex arrangement. The outer ring has mounting holes for the housing for easier handling and the use of a newly developed seal ensures low torque and high dust resistance.

■ Features

1. Greater load capacity with optimizations made to the internal bearing design.
2. Use of newly developed light-contact seal to achieve both low torque and high dust resistance.
3. The long operating life of the BST type, and use of urea based special grease with excellent fretting resistance.
4. Outer ring mounting hole, and sealed grease lubrication for easier handling.
5. Specifications combining two of these units (D2) are also available for high-load capacity applications.

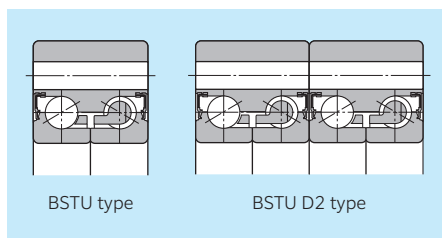


Fig. 13.10 BSTU

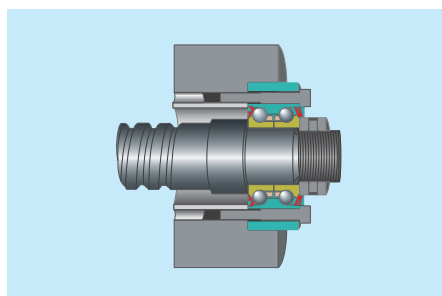


Fig. 13.11 Example of mounted BSTU type

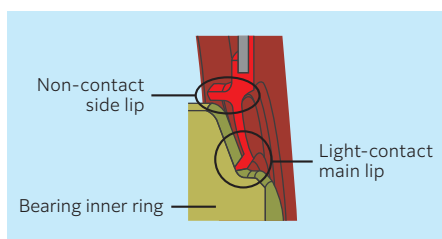


Fig. 13.12 Light-contact seal (code: LX)

■ Performance tests

(1) Bearing operating test

The BSTU type exhibit stable temperature rises up to 5 000 min⁻¹ (d_{mh} value 0.225×10^6) due to optimizations made to the internal bearing design and the use of a newly developed light-contact seal (see Fig. 13.13).

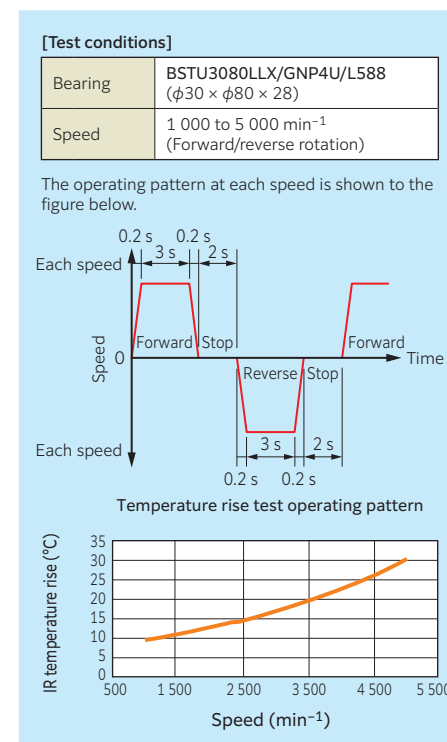


Fig. 13.13 Relation between speed and temperature rise

(2) Torque test, dust test

The BSTU type limits starting torque and has better dust resistance with the use of a newly developed light-contact seal (see Fig. 13.14 and Fig. 13.15).

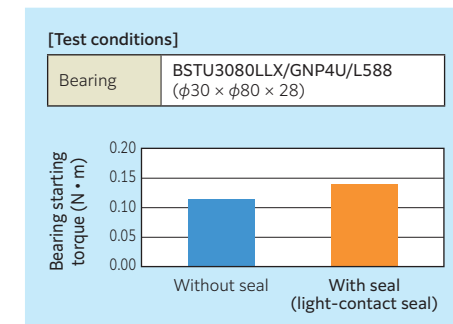


Fig. 13.14 Bearing starting torque

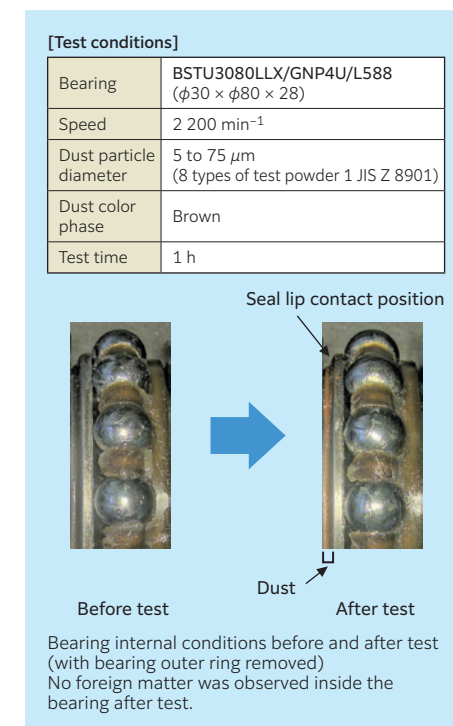


Fig. 13.15 Dust test results

13.3 Angular contact ball bearings HT

HT type angular contact ball bearings feature larger axial load capacity while maintaining the same dimensions as a standard angular contact ball bearing (contact angle: 30°). Bearings smaller than the BST type are available for use in small machines.

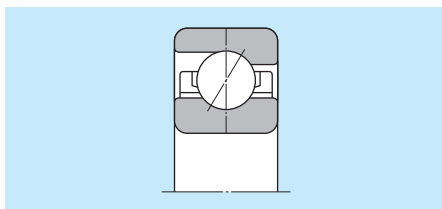


Fig. 13.16 HT

13.4 Needle roller bearings with double-direction thrust needle roller bearings AXN Needle roller bearings with double-direction thrust cylindrical roller bearings ARN

AXN and ARN types bearings have thrust needle roller or thrust cylindrical roller bearings on both sides of a radial needle roller bearing. The outer ring side face of the radial needle roller bearing is used as the raceway of both thrust bearings. These bearings can withstand axial loads in both directions while maintaining compact designs. The radial needle roller bearings are suitable for heavy radial loads.

The axial rigidity of the AXN type is extremely enhanced since the thrust needle roller bearings are used for axial loads.

Likewise, the axial rigidity of the ARN type is improved. Since the axial load capacity of this type is larger than the AXN type, this type is suitable for heavy axial loads. Oil lubrication is recommended for the ARN type.

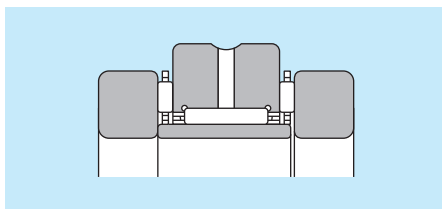


Fig. 13.17 AXN

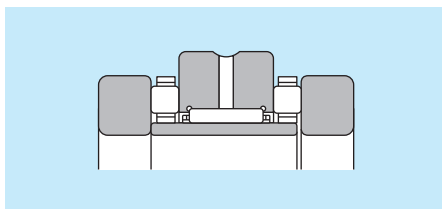


Fig. 13.18 ARN

13.5 Bearing designations

The part number for a ball screw support bearing consists of a type code, dimension code, and various suffixes.

■ BST type

2A - BST 20 × 47 -1B LXL DBT P4 / L588

- Grease code L588: Urea based special grease
- Tolerance class code P5: **NTN** Class 5
P4: **NTN** Class 4
UP: Special high precision
- Arrangement code
- Seal code LXL: Light contact rubber seal on both sides
- Identification code
Preload code and added number
-1B: Standard preload
-11B: Light preload
- Outside diameter (mm)
- Nominal bore diameter (mm)
- Bearing type code
- Heat treatment

■ HT type

7 0 04 HT DF / GM P4

- Tolerance class code
P5: JIS Class 5
P4: JIS Class 4
- Preload code
GM: Medium preload
GH: Heavy preload
- Arrangement code
- Internal design code
- Nominal bore diameter
(See dimension table)
- Dimension series code
- Bearing type code

■ AXN and ARN types

AXN 2052 P4

- Tolerance class code
P5: **NTN** Class 5
P4: **NTN** Class 4
- Dimension
Bore diameter,
outside diameter (mm)
- Bearing type code
AXN
ARN

■ BSTU type

BSTU 30 80 LLX N DX D2 /GN P42U /L588

- Grease code
- Tolerance class code
P4U: **NTN** Class 4, P42U: **NTN** Class 42
- Preload code
- Arrangement code
- Outer ring re-lubricating hole
- Outer ring pullout groove
- Seal code
- Outside diameter (mm)
- Nominal bore diameter (mm)
- Bearing type code

13.6 Bearing accuracy

The precision of ball screw support bearings varies depending on the bearing type.

● BST type

Available in **NTN** Class 5 (tolerance class code P5), Class 4 (tolerance class code P4) each complying with JIS standards, and grade UP (tolerance class code UP). The classes are listed in ascending order.

● BSTU type

NTN standard Class 4 (tolerance class code P4U) and Class 42 (tolerance class code P42U) complying with the JIS standards are available.

● 70HT type

Same precision as the angular contact ball bearing for radial loads. JIS Classes 5 and 4 are available.

● AXN, ARN types

NTN standard Classes 4 and 5 complying with the JIS standards are available.

■ Accuracy of BST type

Table 13.7 Inner rings

Unit: μm

Nominal bore diameter d	Deviation of mean bore diameter in a single plane Δ_{dmp}						Radial runout K_{ia}			Perpendicularity of inner ring face with respect to the bore S_d			Axial runout S_{ia}			Width deviation Δ_{Bs}			Width variation V_{Bs}					
mm	Class 5		Class 4 ¹⁾		Class UP ¹⁾		Class 5		Class 4		Class UP		Class 5		Class 4		Class UP		Class 5		Class 4		Class UP	
over incl.	high	low	high	low	high	low	max			max			max			high	low	high	low	max				
10 18	0	-5	0	-4	0	-3.5	3.5	3	2	7	3	2	5	3	2	0	-120	0	-100	5	2.5	2		
18 30	0	-6	0	-5	0	-3.5	4	3	2	8	4	3	5	3	2	0	-120	0	-100	5	2.5	2		
30 50	0	-8	0	-6	0	-5	5	4	3	8	4	3	6	3	2	0	-120	0	-100	5	3	2		
50 80	0	-9	0	-7	0	-5	5	4	4	8	5	4	7	4	3	0	-150	0	-150	6	4	3		

1) The dimensional difference Δ_{dS} of the measured bore diameter applied to Classes 4 and UP is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane.

Table 13.8 Outer rings

Unit: μm

Nominal outside diameter	Deviation of mean outside diameter in a single plane						Radial runout			Perpendicularity of outer ring outside surface with respect to the face			Axial runout	Width deviation			Width variation				
D	Δ_{Dmp}						K_{ea}			S_D			S_{ea}	Δ_{Cs}			V_{Cs}				
mm	Class 5 Class 4 ²⁾ Class UP ²⁾						Class 5	Class 4	Class UP	Class 5	Class 4	Class UP	All classes	All classes			Class 5	Class 4	Class UP		
over incl.	high	low	high	low	high	low	max			max							max				
30 50	0	–	7	0	–	6	0	–	5	7	5	4	8	4	3	Depends on tolerance of S_{la}			5	2.5	2
50 80	0	–	9	0	–	7	0	–	5	8	5	4	8	4	3	in relation to d of the same bearing			6	3	2
80 120	0	–	10	0	–	8	0	–	7	10	6	4	9	5	4	in relation to d of the same bearing			8	4	3

2) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Classes 4 and UP is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane.

Note: This standard is the **NTN** standard.

■ Accuracy of BSTU type (Class P42U)

Table 13.9 Inner rings

Unit: μm

Nominal bore diameter d	Deviation of mean bore diameter in a single plane Δ_{dmp}		Variation of bore diameter in a single plane V_{dsp}	Perpendicularity of inner ring face with respect to the bore V_{dmp}	Radial runout K_{ia}	Variation of mean bore diameter S_d	Axial runout S_{ia}	Deviation of a single inner ring width Δ_{Bs}		Width variation V_{Bs}
mm	high	low	max	max	max	max	max	high	low	max
20	0	-5	2.5	2.5	3	4	2	0	-125	2
25	0	-5	2.5	2.5	3	4	2	0	-125	2
30	0	-5	2.5	2.5	3	4	2.5	0	-125	2.5
35	0	-5	2.5	2.5	4	4	2.5	0	-125	2.5
40	0	-5	2.5	2.5	4	4	2.5	0	-125	2.5
90	0	-8	4	4	5	5	3	0	-125	3
100	0	-8	4	4	5	5	3	0	-125	3

Table 13.10 Outer rings

Unit: μm

Nominal outside diameter D	Deviation of mean outside diameter in a single plane Δ_{Dmp}		Variation of outside diameter in a single plane V_{Dsp}	Perpendicularity of outer ring outside surface with respect to the face V_{Dmp}	Radial runout K_{ea}	Variation of mean outside diameter S_D	Axial runout S_{ea}	Deviation of a single outer ring width Δ_{Cs}		Width variation V_{Cs}
mm	high	low	max	max	max	max	max	high	low	max
68	0	-10	3.5	3.5	5	4	5	0	-250	3
75	0	-10	3.5	3.5	5	4	5	0	-250	3
80	0	-10	3.5	3.5	5	4	5	0	-250	3
90	0	-10	4	4	6	5	6	0	-250	4
100	0	-10	4	4	6	5	6	0	-250	4
115	0	-10	4	4	6	5	6	0	-250	4
190	0	-15	8	6	10	7	10	0	-250	7
200	0	-15	8	6	10	7	10	0	-250	7

Note: This standard is the **NTN** standard.

■ Accuracy of BSTU type (Class P4U)

Table 13.11 Inner rings

Unit: μm

Nominal bore diameter	Deviation of mean bore diameter in a single plane		Variation of bore diameter in a single plane	Perpendicularity of inner ring face with respect to the bore	Radial runout	Variation of mean bore diameter	Axial runout	Deviation of a single inner ring width		Width variation
d mm	Δ_{dmp}		V_{dsp}	V_{dmp}	K_{ia}	S_d	S_{ia}	Δ_{Bs}		V_{Bs}
	high	low	max	max	max	max	max	high	low	max
20	0	-5	2.5	2.5	3	4	4	0	-125	2.5
25	0	-5	2.5	2.5	3	4	4	0	-125	2.5
30	0	-5	2.5	2.5	3	4	4	0	-125	2.5
35	0	-5	2.5	2.5	4	4	4	0	-125	3
40	0	-5	2.5	2.5	4	4	4	0	-125	3
90	0	-8	4	4	5	5	5	0	-125	4
100	0	-8	4	4	5	5	5	0	-125	4

Table 13.12 Outer rings

Unit: μm

Nominal outside diameter	Deviation of mean outside diameter in a single plane		Variation of outside diameter in a single plane	Perpendicularity of outer ring outside surface with respect to the face	Radial runout	Variation of mean outside diameter	Axial runout	Deviation of a single outer ring width		Width variation
D mm	Δ_{Dmp}		V_{Dsp}	V_{Dmp}	K_{ea}	S_D	S_{ea}	Δ_{Cs}		V_{Cs}
	high	low	max	max	max	max	max	high	low	max
68	0	-10	3.5	3.5	5	4	5	0	-250	3
75	0	-10	3.5	3.5	5	4	5	0	-250	3
80	0	-10	3.5	3.5	5	4	5	0	-250	3
90	0	-10	4	4	6	5	6	0	-250	4
100	0	-10	4	4	6	5	6	0	-250	4
115	0	-10	4	4	6	5	6	0	-250	4
190	0	-15	8	6	10	7	10	0	-250	7
200	0	-15	8	6	10	7	10	0	-250	7

Note: This standard is the **NTN** standard.

■ Accuracy of HT type

Table 13.13 Inner rings

Nominal bore diameter d		Deviation of mean bore diameter in a single plane						Variation of bore diameter in a single plane						Variation of mean bore diameter			Inner ring radial runout		
		Δ_{dmp}						V_{dsp}						V_{dmp}			K_{ia}		
		Class 5		Class 4 ¹⁾		Class 2 ¹⁾		Diameter series 9			Diameter series 0, 2			Class 5 Class 4 Class 2			Class 5 Class 4 Class 2		
		mm over	incl.	high	low	high	low	max	max	max	max	max	max	max	max	max	max	max	max
2.5	10	0	-5	0	-4	0	-2.5	5	4	2.5	4	3	2.5	3	2	1.5	4	2.5	1.5
10	18	0	-5	0	-4	0	-2.5	5	4	2.5	4	3	2.5	3	2	1.5	4	2.5	1.5
18	30	0	-6	0	-5	0	-2.5	6	5	2.5	5	4	2.5	3	2.5	1.5	4	3	2.5
30	50	0	-8	0	-6	0	-2.5	8	6	2.5	6	5	2.5	4	3	1.5	5	4	2.5

- 1) The dimensional difference Δ_{ds} of the measured bore diameter applied to Classes 4 and 2 is the same as the tolerance of dimensional difference Δ_{dmp} of the mean bore diameter within a plane. However, the dimensional difference is applied to diameter series 0 and 2 for Class 4, and also to all the diameter series for Class 2.
2) Applies to individual raceway rings manufactured for combined bearing use.

Table 13.14 Outer rings

Nominal outside diameter D		Deviation of mean outside diameter in a single plane						Variation of outside diameter in a single plane						Mean single plane outside diameter deviation			Outer ring radial runout		
		Δ_{Dmp}						V_{Dsp}						V_{Dmp}			K_{ea}		
		Class 5		Class 4 ³⁾		Class 2 ³⁾		Diameter series 9			Diameter series 0, 2			Class 5 Class 4 Class 2			Class 5 Class 4 Class 2		
		mm over	incl.	high	low	high	low	max	max	max	max	max	max	max	max	max	max	max	max
18	30	0	-6	0	-5	0	-5	6	5	4	5	4	4	3	2.5	2	6	4	2.5
30	50	0	-7	0	-6	0	-4	7	6	4	5	5	4	4	3	2	7	5	2.5
50	80	0	-9	0	-7	0	-4	9	7	4	7	5	4	5	3.5	2	8	5	4

- 3) The dimensional difference Δ_{Ds} of the measured outside diameter applied to Classes 4 and 2 is the same as the tolerance of dimensional difference Δ_{Dmp} of the mean outside diameter within a plane. However, the dimensional difference is applied to diameter series 0 and 2 for Class 4, and also to all the diameter series for Class 2.

■ Accuracy of AXN and ARN types

Table 13.15 Inner ring and outer ring

Nominal bearing bore dia. d or nominal bearing outside dia. D		Deviation of mean bore ¹⁾ diameter in a single plane				Thrust inner ring bore ¹⁾ dia. deviation		Deviation of mean outside ²⁾ diameter in a single plane				Deviation of the bearing height		Outer ring width deviation		Radial inner ring ¹⁾ radial runout	
		Δ_{dmp}				Δ_{dis}		Δ_{Dmp}				Δ_{Ts}		Δ_{Cs}		K_{ia}	
		Class 5		Class 4				Class 5		Class 4						Class 5 Class 4	
		mm over	incl.	high	low			high	low	high	low					high	low
18	30	0	-6	0	-5	+61	+40	-	-	-	-	0	-370	0	-130	4	3
30	50	0	-8	0	-6	+75	+50	-	-	-	-					5	4
50	80	0	-9	0	-7	+90	+60	0	-9	0	-9					5	4
80	120	-	-	-	-	-	-	0	-10	0	-10					-	-
120	150	-	-	-	-	-	-	0	-11	0	-11					-	-

- 1) Applicable only to dimension d . 2) Applicable only to dimension D .
Note: This standard is the **NTN** standard.

Unit: μm

Perpendicularity of inner ring face with respect to the bore			Axial runout			Deviation of a single inner ring width				Width variation			
S_d			S_{ia}			Δ_{Bs}				V_{Bs}			
						Single bearing		Duplex bearing ²⁾					
Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	Class 5	Class 4	Class 5	Class 4	Class 2
max			max			high	low		high	low	max		
7	3	1.5	7	3	1.5	0	− 40		0	− 250	5	2.5	1.5
7	3	1.5	7	3	1.5	0	− 80		0	− 250	5	2.5	1.5
8	4	1.5	8	4	2.5	0	− 120		0	− 250	5	2.5	1.5
8	4	1.5	8	4	2.5	0	− 120		0	− 250	5	3	1.5

Unit: μm

Perpendicularity of outer ring outside surface with respect to the face			Axial runout			Deviation of a single outer ring width	Width variation			
S_D			S_{ea}			Δ_{Cs}	V_{Cs}			
Class 5	Class 4	Class 2	Class 5	Class 4	Class 2	All classes	Class 5	Class 4	Class 2	
max			max				max			
8	4	1.5	8	5	2.5		Identical to Δ_{Bs} relative to d of the same bearing	5	2.5	1.5
8	4	1.5	8	5	2.5			5	2.5	1.5
8	4	1.5	10	5	4	6		3	1.5	

Unit: μm

Outer ring ²⁾ radial runout	K_{ea}	Perpendicularity of outer ring ²⁾ outside surface with respect to the face		Thrust inner ring and ¹⁾ outer ring thickness variation ²⁾	
		S_D		S_{ia}, S_{ea}	
		Class 5	Class 4	Class 5	Class 4
		max	max	max	max
-	-	-	-	3	2
-	-	-	-	3	2
8	5	8	4	4	3
10	6	9	5	4	3
11	7	10	5	5	4

13.7 Standard preload and axial rigidity

Standard preloads for each type of ball screw support bearings are shown in the dimension tables. In the AXN and ARN types, rigidity is enhanced by clamp the thrust raceways on both sides to supply preload. A bearing that allows preset preload by clamp the bearing raceways to adjust the clearance A between the thrust bearing ring and radial bearing ring (see Fig. 13.19) is also available. Ask **NTN** for details.

Axial rigidity of the BST type DB duplex arrangement and the AXN type at the standard preload are shown in Fig. 13.20 and Fig. 13.21.

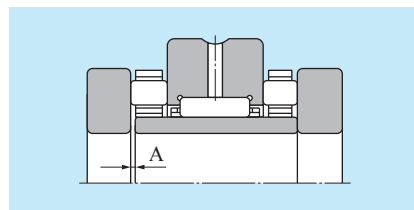


Fig. 13.19

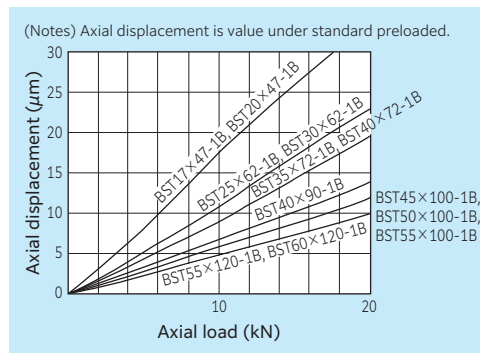


Fig. 13.20 BST type axial rigidity diagram

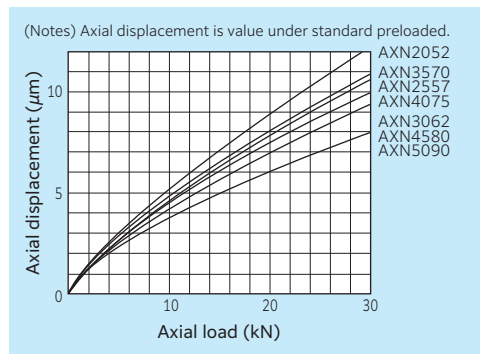


Fig. 13.21 AXN type axial rigidity diagram

13.8 Proper control of preload (BST type)

When applying preload to a BST type, clamp through the inner ring for back-to-back duplex (DB, DTBT, etc.) and the outer ring for face-to-face duplex (DF, DTFT, etc.) with a clamp force 2 to 3 times as large as the preload.

When fastening the outer rings of face-to-face duplex with the front cover, check the outer ring width of the mating bearings on the bearing inspection sheet, and assemble so that the front cover drive-up is 0.02 to 0.03 mm relative to the sum of the outer ring width dimensions.

The clamp method for the BST type is shown in Table 13.16.

Table 13.16 Clamp method for BST type

		back-to-back duplex	face-to-face duplex
Cross section			
Inner ring	Nut clamp force	2 to 3 times as large as the preload	see Table 13.17
	Front cover drive-up	see Table 13.17	0.02–0.03 mm ¹⁾
Outer ring	Nut clamp force	see Table 13.17	2 to 3 times as large as the preload

1) As shown in Fig.13.22, measuring the total width dimension before tightening the outer ring includes the axial clearance. For this reason, use the front cover drive-up to adjust the width of the outer ring to the sum of the outer ring width dimensions on the bearing inspection sheet for the bearing to be combined.

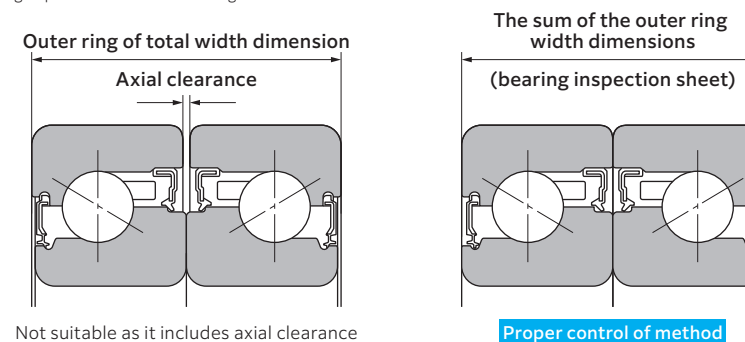


Fig.13.22 Outer ring width control of face-to-face duplex BST type

Table 13.17 Nut clamp force and front cover drive-up

Bearing bore diameter (mm)	Nut clamp force (N)	Nut tightening torque <reference value> (N·m)	Front cover drive-up (mm)
6	1 470	2	0.01–0.02
8		2	
10		4	
12	2 200	5	
15		8	
17	2 900	9	
20		10–17	
25	2 940–4 900	13–22	
30		15–26	
35		18–30	
40	4 900–9 800	34–68	
45		38–75	
50		42–83	
55	9 800–14 700	92–138	
60		100–150	

13.9 Shaft and housing fits

Recommended fits and tolerances of shaft and housing shoulder squareness are shown in Table 13.18 and Table 13.19.

Table 13.18 Shaft and housing fits

Type code	Types and tolerance class	
	Shaft outside diameter	Housing
BST HT	h5	H6
BSTU		
AXN ARN	j5	J6

Table 13.19 Tolerance of shoulder squareness
Unit: μm

Diameter classification mm		Type code			
		BST	BSTU	HT	AXN, ARN
—	30	4	4	4	4
30	80	4	4	4	5
80	120	5	5	—	6
120	180	—	6	—	7
180	200	—	7	—	—

13.10 Recommended lubrication specifications

BST and HT types ball screw support angular contact ball bearings are generally lubricated with grease (BST LXL type bearings with light-contact seals are packed with grease). AXN and ARN types bearings are generally lubricated with circulated oil.

■ Grease lubrication

● Recommended type of grease

Lithium-mineral oil based general purpose grease of which base oil viscosity is high (for example, Alvania Grease S2).

● Recommended grease fill

25 to 30 % of the internal free space shown in the dimension tables

● Recommended grease filling method

Refer to “6. Handling of Bearings, 6.1 Rinsing of bearings and grease filling” in the Technical Data section.

■ Oil lubrication

● Recommended type of oil

Hydraulic oils or other industrial oils used for lubrication of sliding surfaces with viscosity grade ISO VG 32 or higher are recommended.

● Oil quantity

Recommended oil quantity depends on the lubricating method. As a general guideline, the oil flow rate should be 5 to 10 cm^3/min . Increase the amount of oil if slippage is expected.

13.11 Starting torque of BST type

Reference starting torque values for BST type bearings are shown in Table 13.20 and Table 13.21.

Table 13.20 Open type BST and 2A-BST types

Part number	Starting torque (reference) N • mm {kgf • cm}			
	DF type DB type	DFT type DBT type	DTFT type DTBT type	DFTT type DBTT type
BST17X47-1B 2A-BST17X47-1B	175 {1.8}	245 {2.5}	355 {3.6}	275 {2.8}
BST20X47-1B 2A-BST20X47-1B	175 {1.8}	245 {2.5}	355 {3.6}	275 {2.8}
BST25X62-1B 2A-BST25X62-1B	305 {3.1}	420 {4.3}	615 {6.3}	470 {4.8}
BST30X62-1B 2A-BST30X62-1B	305 {3.1}	420 {4.3}	615 {6.3}	470 {4.8}
BST35X72-1B 2A-BST35X72-1B	380 {3.9}	510 {5.2}	755 {7.7}	590 {6.0}
BST40X72-1B 2A-BST40X72-1B	380 {3.9}	510 {5.2}	755 {7.7}	590 {6.0}
BST40X90-1B 2A-BST40X90-1B	960 {9.8}	1 305 {13.3}	1 930 {19.7}	1 500 {15.3}
BST45X75-1B 2A-BST45X75-1B	430 {4.4}	580 {5.9}	860 {8.8}	665 {6.8}
BST45X100-1B 2A-BST45X100-1B	1 165 {11.9}	1 580 {16.1}	2 340 {23.9}	1 815 {18.5}
BST50X100-1B 2A-BST50X100-1B	1 165 {11.9}	1 580 {16.1}	2 340 {23.9}	1 815 {18.5}
BST55X100-1B 2A-BST55X100-1B	1 165 {11.9}	1 580 {16.1}	2 340 {23.9}	1 815 {18.5}
BST55X120-1B 2A-BST55X120-1B	1 490 {15.2}	2 010 {20.5}	2 970 {30.3}	2 310 {23.5}
BST60X120-1B 2A-BST60X120-1B	1 490 {15.2}	2 010 {20.5}	2 970 {30.3}	2 310 {23.5}

Table 13.21 Light-contact sealed type BST LXL/L588 and 2A-BST LXL/L588 types

Part number	Starting torque (reference) N • mm {kgf • cm}			
	DF type DB type	DFT type DBT type	DTFT type DTBT type	DFTT type DBTT type
BST17X47-1BLXL 2A-BST17X47-1BLXL	215 {2.2}	295 {3.0}	420 {4.3}	355 {3.4}
BST20X47-1BLXL 2A-BST20X47-1BLXL	215 {2.2}	295 {3.0}	420 {4.3}	355 {3.4}
BST25X62-1BLXL 2A-BST25X62-1BLXL	365 {3.7}	510 {5.2}	745 {7.6}	570 {5.8}
BST30X62-1BLXL 2A-BST30X62-1BLXL	365 {3.7}	510 {5.2}	745 {7.6}	570 {5.8}
BST35X72-1BLXL 2A-BST35X72-1BLXL	460 {4.7}	610 {6.2}	900 {9.2}	705 {7.2}
BST40X72-1BLXL 2A-BST40X72-1BLXL	460 {4.7}	610 {6.2}	900 {9.2}	705 {7.2}
BST40X90-1BLXL 2A-BST40X90-1BLXL	1 155 {11.8}	1 570 {16.0}	2 315 {23.6}	1 805 {18.4}
BST45X75-1BLXL 2A-BST45X75-1BLXL	520 {5.3}	695 {7.1}	1 040 {10.6}	805 {8.2}
BST45X100-1BLXL 2A-BST45X100-1BLXL	1 400 {14.3}	1 890 {19.3}	2 815 {28.7}	2 175 {22.2}
BST50X100-1BLXL 2A-BST50X100-1BLXL	1 400 {14.3}	1 890 {19.3}	2 815 {28.7}	2 175 {22.2}
BST55X100-1BLXL 2A-BST55X100-1BLXL	1 400 {14.3}	1 890 {19.3}	2 815 {28.7}	2 175 {22.2}
BST55X120-1BLXL 2A-BST55X120-1BLXL	1 780 {18.2}	2 410 {24.5}	3 570 {36.4}	2 770 {28.2}
BST60X120-1BLXL 2A-BST60X120-1BLXL	1 780 {18.2}	2 410 {24.5}	3 570 {36.4}	2 770 {28.2}

13.12 Applications

The BST type is mainly installed on ball screws of machine tool feed systems, and two to four row arrangements are used in many cases. This type is popular because greased sealed angular contact ball bearings are easy to handle. Bearing combinations include the back-to-back arrangement, where the inner rings are clamped to achieve the required preload, and the front arrangement, where the outer rings are clamped. Examples of bearing arrangement are shown in Fig. 13.23 through Fig. 13.25.

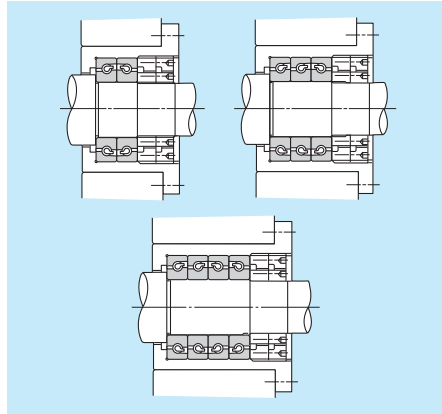


Fig. 13.23

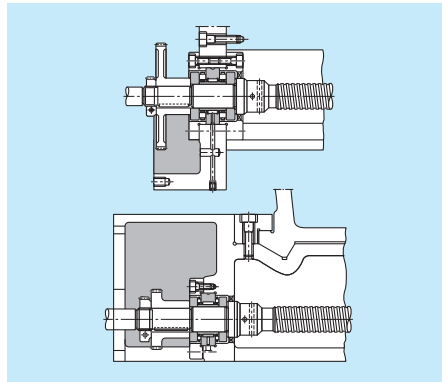


Fig. 13.24

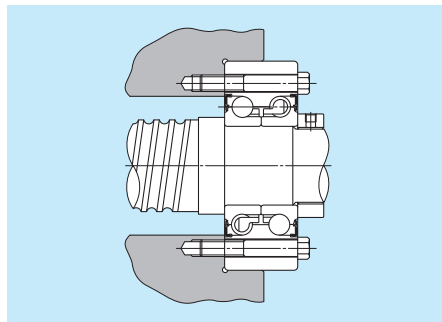



Fig. 13.25

Dynamic equivalent axial load $P_a = XF_r + YF_a$

Number of rows in bearing arrangement	2		3			4			
	1	2	1	2	3	1	2	3	4
$F_a / F_r \leq 2.17$	X	1.90	—	1.43	2.32	—	1.17	1.90	2.52
	Y	0.55	—	0.76	0.35	—	0.88	0.55	0.26
$F_a / F_r > 2.17$	X	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
	Y	1	1	1	1	1	1	1	1

Static equivalent axial load

$$P_{0a} = F_a + 3.98F_r$$

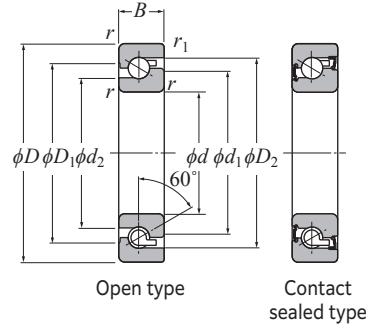


Open type

Contact sealed type

Contact angle 60° **d** 17–60 mm

Part number	Boundary dimensions						Basic dynamic rated load $C_a^{(2)}$			Basic static rated load $C_{0a}^{(2)}$			Dimensions				Internal free space cm^3 Single-row (approx.)			Allowable axial load ²⁾ (static) kN kgf			Allowable speed min^{-1}	
	mm						kN kgf			kN kgf			mm											
	d	D	B	$r_{s \min}^{(1)}$	$r_{ls \min}^{(1)}$		1-row	2-row	3-row	1-row	2-row	3-row	d_1	d_2	D_1	D_2				1-row	2-row	3-row	grease lubrication	oil lubrication
BST17X47-1B	17	47	15	1	0.6		24.3	39.5	52.5	37.5	75.0	113												
BST17X47-1BLXL							2 470	4 000	5 350	3 850	7 650	11 500	29.9	27.1	37.1	40.7	4.4			25.7	51.5	77.0	6 500	10 000
BST20X47-1B	20	47	15	1	0.6		24.3	39.5	52.5	37.5	75.0	113	29.9	27.1	37.1	40.7	4.4			25.7	51.5	77.0	6 500	10 000
BST20X47-1BLXL							2 470	4 000	5 350	3 850	7 650	11 500		25.7		41.2				2 620	5 250	7 850		—
BST25X62-1B	25	62	15	1	0.6		29.2	47.5	63.0	59.0	118	177	44.4	41.6	51.6	55.2	5.9			40.0	80.5	121	4 600	7 000
BST25X62-1BLXL							2 980	4 850	6 450	6 050	12 100	18 100		40.2		55.7				4 100	8 200	12 300		—
BST30X62-1B	30	62	15	1	0.6		29.2	47.5	63.0	59.0	118	177	44.4	41.6	51.6	55.2	5.9			40.0	80.5	121	4 600	7 000
BST30X62-1BLXL							2 980	4 850	6 450	6 050	12 100	18 100		40.2		55.7				4 100	8 200	12 300		—
BST35X72-1B	35	72	15	1	0.6		31.0	50.5	67.0	70.0	140	210	52.4	49.6	59.6	63.2	6.7			47.5	95.0	143	3 900	6 000
BST35X72-1BLXL							3 150	5 150	6 850	7 150	14 300	21 400		48.2		63.7				4 850	9 700	14 600		—
BST40X72-1B	40	72	15	1	0.6		31.0	50.5	67.0	70.0	140	210	52.4	49.6	59.6	63.2	6.7			47.5	95.0	143	3 900	6 000
BST40X72-1BLXL							3 150	5 150	6 850	7 150	14 300	21 400		48.2		63.7				4 850	9 700	14 600		—
BST40X90-1B	40	90	20	1	0.6		58.5	95.0	126	130	261	390	64.8	60.7	75.2	80.4	15			88.5	177	265	3 100	5 400
BST40X90-1BLXL							6 000	9 700	12 900	13 300	26 600	40 000		59.1		81.6				9 000	18 000	27 000		—
BST45X75-1B	45	75	15	1	0.6		32.0	52.0	69.5	77.5	155	232	58.4	55.6	65.6	69.2	7.4			52.5	105	158	3 500	6 000
BST45X75-1BLXL							3 300	5 350	7 100	7 900	15 800	23 700		54.2		69.7				5 350	10 700	16 100		—
BST45X100-1B	45	100	20	1	0.6		62.0	101	134	153	305	460	75.8	71.7	86.2	91.4	18			104	208	315	2 700	4 400
BST45X100-1BLXL							6 350	10 300	13 700	15 600	31 000	47 000		70.1		92.6				10 600	21 200	32 000		—
BST50X100-1B	50	100	20	1	0.6		62.0	101	134	153	305	460	75.8	71.7	86.2	91.4	18			104	208	315	2 700	4 400
BST50X100-1BLXL							6 350	10 300	13 700	15 600	31 000	47 000		70.1		92.6				10 600	21 200	32 000		—
BST55X100-1B	55	100	20	1	0.6		62.0	101	134	153	305	460	75.8	71.7	86.2	91.4	18			104	208	315	2 700	4 400
BST55X100-1BLXL							6 350	10 300	13 700	15 600	31 000	47 000		70.1		92.6				10 600	21 200	32 000		—
BST55X120-1B	55	120	20	1	0.6		66.5	108	143	183	365	550	90.8	86.7	101.2	106.4	21			124	249	375	2 300	3 700
BST55X120-1BLXL							6 750	11 000	14 600	18 700	37 500	56 000		85.1		107.6				12 700	25 400	38 000		—
BST60X120-1B	60	120	20	1	0.6		66.5	108	143	183	365	550	90.8	86.7	101.2	106.4	21			124	249	375	2 300	3 700
BST60X120-1BLXL							6 750	11 000	14 600	18 700	37 500	56 000		85.1		107.6				12 700	25 400	38 000		—

1) Minimum allowable value for corner radius dimension r or r_1 .

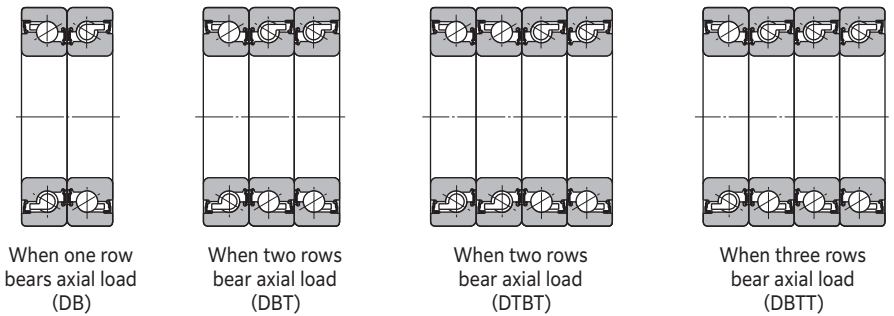

When one row bears axial load (DB)

When two rows bear axial load (DBT)

When two rows bear axial load (DTBT)

When three rows bear axial load (DBTT)


2) The number of rows means the number of bearings that bear the axial load.

Dynamic equivalent axial load $P_a = XF_r + YF_a$


Number of rows in bearing arrangement	2		3			4			
Number of rows subjected to axial load	1	2	1	2	3	1	2	3	4
$F_a / F_r \leq 2.17$	X	1.90	—	1.43	2.32	—	1.17	1.90	2.52
	Y	0.55	—	0.76	0.35	—	0.88	0.55	0.26
$F_a / F_r > 2.17$	X	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
	Y	1	1	1	1	1	1	1	1

Static equivalent axial load


$$P_{0a} = F_a + 3.98F_r$$

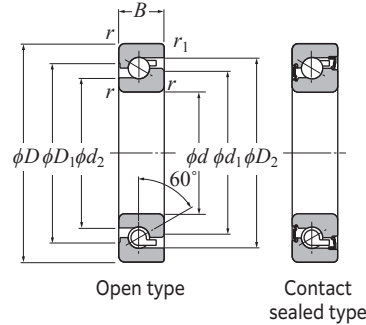


When one row bears axial load (DB)



When two rows bear axial load (DBT)



When two rows bear axial load (DTBT)




When three rows bear axial load (DBTT)

Contact angle 60° **d** 17–60 mm

Part number	Boundary dimensions						Basic dynamic rated load $C_a^{(2)}$			Basic static rated load $C_{0a}^{(2)}$			Dimensions				Internal free space cm ³ Single-row (approx.)	Allowable axial load ²⁾ (static) kN kgf			Allowable speed	
	mm						kN kgf			kN kgf			mm								min ⁻¹	
	d	D	B	$r_{s\min}^{(1)}$	$r_{ls\min}^{(1)}$		1-row	2-row	3-row	1-row	2-row	3-row	d_1	d_2	D_1	D_2		1-row	2-row	3-row	grease lubrication	oil lubrication
2A-BST17X47-1B	17	47	15	1	0.6		24.3	39.5	52.5	37.5	75.0	113	29.9	27.1	37.1	40.7	4.4	25.7	51.5	77.0	6 500	10 000
2A-BST17X47-1BLXL							2 470	4 000	5 350	3 850	7 650	11 500			25.7			41.2		2 620		5 250
2A-BST20X47-1B	20	47	15	1	0.6		24.3	39.5	52.5	37.5	75.0	113	29.9	27.1	37.1	40.7	4.4	25.7	51.5	77.0	6 500	10 000
2A-BST20X47-1BLXL							2 470	4 000	5 350	3 850	7 650	11 500			25.7			41.2		2 620		5 250
2A-BST25X62-1B	25	62	15	1	0.6		29.2	47.5	63.0	59.0	118	177	44.4	41.6	51.6	55.2	5.9	40.0	80.5	121	4 600	7 000
2A-BST25X62-1BLXL							2 980	4 850	6 450	6 050	12 100	18 100			40.2			55.7		4 100		8 200
2A-BST30X62-1B	30	62	15	1	0.6		29.2	47.5	63.0	59.0	118	177	44.4	41.6	51.6	55.2	5.9	40.0	80.5	121	4 600	7 000
2A-BST30X62-1BLXL							2 980	4 850	6 450	6 050	12 100	18 100			40.2			55.7		4 100		8 200
2A-BST35X72-1B	35	72	15	1	0.6		31.0	50.5	67.0	70.0	140	210	52.4	49.6	59.6	63.2	6.7	47.5	95.0	143	3 900	6 000
2A-BST35X72-1BLXL							3 150	5 150	6 850	7 150	14 300	21 400			48.2			63.7		4 850		9 700
2A-BST40X72-1B	40	72	15	1	0.6		31.0	50.5	67.0	70.0	140	210	52.4	49.6	59.6	63.2	6.7	47.5	95.0	143	3 900	6 000
2A-BST40X72-1BLXL							3 150	5 150	6 850	7 150	14 300	21 400			48.2			63.7		4 850		9 700
2A-BST40X90-1B	40	90	20	1	0.6		58.5	95.0	126	130	261	390	64.8	60.7	75.2	80.4	15	88.5	177	265	3 100	5 400
2A-BST40X90-1BLXL							6 000	9 700	12 900	13 300	26 600	40 000			59.1			81.6		9 000		18 000
2A-BST45X75-1B	45	75	15	1	0.6		32.0	52.0	69.5	77.5	155	232	58.4	55.6	65.6	69.2	7.4	52.5	105	158	3 500	6 000
2A-BST45X75-1BLXL							3 300	5 350	7 100	7 900	15 800	23 700			54.2			69.7		5 350		10 700
2A-BST45X100-1B	45	100	20	1	0.6		62.0	101	134	153	305	460	75.8	71.7	86.2	91.4	18	104	208	315	2 700	4 400
2A-BST45X100-1BLXL							6 350	10 300	13 700	15 600	31 000	47 000			70.1			92.6		10 600		21 200
2A-BST50X100-1B	50	100	20	1	0.6		62.0	101	134	153	305	460	75.8	71.7	86.2	91.4	18	104	208	315	2 700	4 400
2A-BST50X100-1BLXL							6 350	10 300	13 700	15 600	31 000	47 000			70.1			92.6		10 600		21 200
2A-BST55X100-1B	55	100	20	1	0.6		62.0	101	134	153	305	460	75.8	71.7	86.2	91.4	18	104	208	315	2 700	4 400
2A-BST55X100-1BLXL							6 350	10 300	13 700	15 600	31 000	47 000			70.1			92.6		10 600		21 200
2A-BST55X120-1B	55	120	20	1	0.6		66.5	108	143	183	365	550	90.8	86.7	101.2	106.4	21	124	249	375	2 300	3 700
2A-BST55X120-1BLXL							6 750	11 000	14 600	18 700	37 500	56 000			85.1			107.6		12 700		25 400
2A-BST60X120-1B	60	120	20	1	0.6		66.5	108	143	183	365	550	90.8	86.7	101.2	106.4	21	124	249	375	2 300	3 700
2A-BST60X120-1BLXL							6 750	11 000	14 600	18 700	37 500	56 000			85.1			107.6		12 700		25 400


1) Minimum allowable value for corner radius dimension r or r_1 .

2) The number of rows means the number of bearings that bear the axial load.

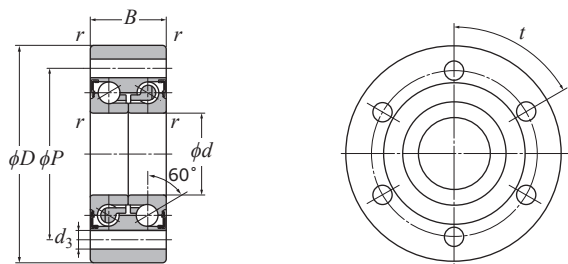
 Contact angle 60° d 20–100 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Allowable speed min ⁻¹ grease lubrication	Reference dimensions		Abutment and fillet dimensions		Outer ring mounting bolt		Preload		Mass kg	Bearing friction torque N·m	Axial rigidity N/μm	Moment rigidity N·m/mrad	Inertia of inner ring kg·cm ²	Part number
							dynamic	static	dynamic	static										N	kgf						
	mm						kN		kgf	kN	kgf	mm		mm	mm	Screws	Quantity × t										
	d	D	B	r _{s min} ¹⁾	P	d ₃	C _a	C _{0a}	C _a	C _{0a}	(static)	d ₁		d ₂	D _a max	d _a min					(approx.)						
BSTU2068LLX	20	68	28	0.6	53	6.8	31.0	48.0	3 200	4 900	24.0	2 450	6 000	30.1	43	42	26	M6	4×90°	2 100	215	0.60	0.2	675	150	0.25	BSTU2068LLX
BSTU2575LLX	25	75	28	0.6	58	6.8	34.0	58.0	3 450	5 950	28.5	2 910	5 000	36.1	49	48	32	M6	4×90°	2 400	245	0.72	0.3	790	230	0.45	BSTU2575LLX
BSTU3080LLX	30	80	28	0.6	63	6.8	36.5	68.5	3 700	6 950	33.0	3 350	4 500	41.1	54	53	37	M6	6×60°	2 700	275	0.78	0.3	900	315	0.68	BSTU3080LLX
BSTU30100LLX	30	100	38	0.6	80	8.8	73.5	121	7 500	12 400	61.5	6 250	4 000	47.1	65	64	39	M8	8×45°	4 800	490	1.71	0.8	1 040	500	1.99	BSTU30100LLX
BSTU40100LLX	40	100	34	0.6	80	8.8	52.0	106	5 300	10 800	50.5	5 150	3 500	54.1	68.9	68	49	M8	4×90°	3 200	325	1.46	0.4	1 050	610	2.16	BSTU40100LLX
BSTU40115LLX	40	115	46	0.6	94	8.8	89.0	167	9 050	17 000	82.5	8 400	3 200	61.1	80.2	80	52	M8	12×30°	5 800	590	2.57	1.0	1 260	960	5.52	BSTU40115LLX
BSTU90190LLX	90	190	55	0.6	165	11	158	415	16 100	42 000	195	19 900	1 700	116.1	138.7	137	104	M10	8×45°	8 200	835	7.95	1.5	2 010	4 700	60.0	BSTU90190LLX
BSTU100200LLX	100	200	55	0.6	175	11	160	435	16 300	44 500	205	20 900	1 500	128.1	150.7	150	116	M10	8×45°	8 800	895	8.47	1.7	2 130	5 800	83.8	BSTU100200LLX

1) Minimum allowable value for corner radius dimension r.



Dynamic equivalent radial load


$$P_a = XF_r + YF_a$$

e	F _a /F _r ≤ e		F _a /F _r > e	
	X	Y	X	Y
2.17	1.90	0.55	0.92	1

Static equivalent radial load

$$P_{0a} = F_a + 3.98 F_r$$


ULTAGE Double-row thrust angular contact ball bearing unit BSTU LLX D2 type

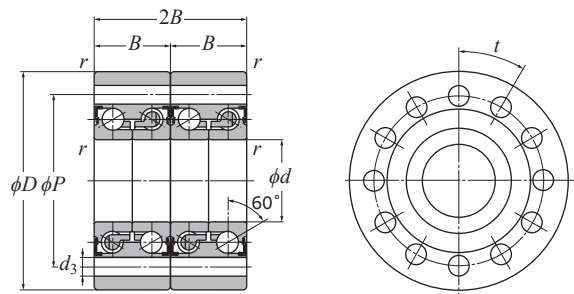

Contact angle 60° d 20–40 mm

Part number	Boundary dimensions						Basic load ratings				Allowable axial load		Allowable speed	Reference dimensions		Abutment and fillet dimensions		Outer ring mounting bolt		Preload		Mass	Bearing friction torque	Axial rigidity	Moment rigidity	Inertia of inner ring	Part number
							dynamic	static	dynamic	static										N	kgf						
	mm						kN	kgf	kN	kgf	min ⁻¹	mm	mm	mm	Screws	Quantity × t	(approx.)	(approx.)									
	d	D	2B	r _{s min} ¹⁾	P	d ₃	C _a	C _{0a}	C _a	C _{0a}	(static)	grease lubrication	d ₁	d ₂	D _a max	d _a min											
BSTU2068LLXD2	20	68	56	0.6	53	6.8	50.5	96.0	5 150	9 800	48.0	4 900	6 000	30.1	43	42	26	M6	8×45°	4 200	430	1.20	0.5	1 350	340	0.50	BSTU2068LLXD2
BSTU2575LLXD2	25	75	56	0.6	58	6.8	55.0	116	5 600	11 900	57.0	5 820	5 000	36.1	49	48	32	M6	8×45°	4 800	490	1.44	0.5	1 580	510	0.90	BSTU2575LLXD2
BSTU3080LLXD2	30	80	56	0.6	63	6.8	59.0	137	6 000	13 900	65.0	6 700	4 500	41.1	54	53	37	M6	12×30°	5 400	550	1.56	0.6	1 800	690	1.36	BSTU3080LLXD2
BSTU40100LLXD2	40	100	68	0.6	80	8.8	84.0	212	8 600	21 600	101	10 300	3 500	54.1	68.9	68	49	M8	8×45°	6 350	650	2.92	0.8	2 100	1 310	4.32	BSTU40100LLXD2
BSTU40115LLXD2	40	115	92	0.6	94	8.8	144	335	14 700	34 000	165	16 800	3 200	61.1	80.2	80	52	M8	12×30°	11 600	1 180	5.14	2.0	2 520	2 150	11.0	BSTU40115LLXD2

1) Minimum allowable value for corner radius dimension r.

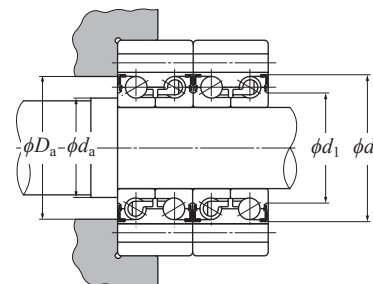

Dynamic equivalent radial load

$$P_a = X F_r + Y F_a$$

e	F _a /F _r ≤ e		F _a /F _r > e	
	X	Y	X	Y
2.17	—	—	0.92	1

Static equivalent radial load

$$P_{0a} = F_a + 3.98 F_r$$

Angular contact ball bearings HT type


Dynamic equivalent axial load $P_a = XF_r + YF_a$

Number of rows in bearing arrangement	2		3			4			
	1	2	1	2	3	1	2	3	4
$F_a / F_r \leq 0.80$	X	0.81	—	0.61	0.99	—	0.50	0.81	1.07
	Y	0.63	—	0.88	0.40	—	1.02	0.63	0.30
$F_a / F_r > 0.80$	X	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51
	Y	1	1	1	1	1	1	1	1


Static equivalent axial load

$$P_{0a} = 1.52F_r + F_a$$

Contact angle 30° d 6–40 mm



Back-to-back (DB)
Drawings 1

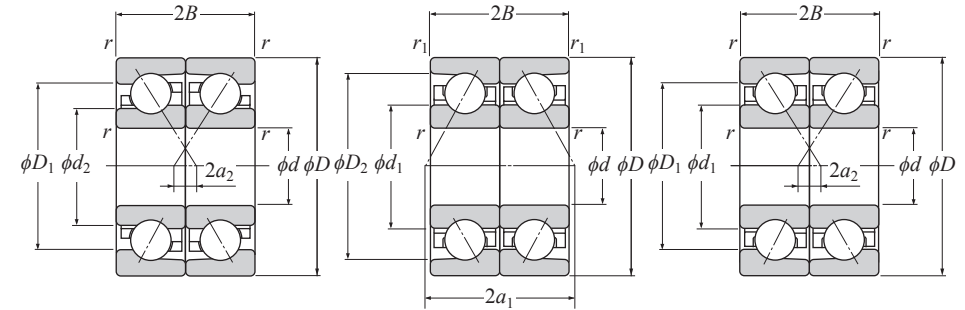

Face-to-face (DF)
Drawings 1

Back-to-back (DB)
Drawings 2

Face-to-face (DF)
Drawings 2

Part number		Boundary dimensions					Basic load ratings				Dimensions				Load center		Drawing number	Allowable axial load ²⁾				Medium preload (GM)								Heavy preload (GH)											
							dynamic	static	dynamic	static												Preload ³⁾	Axial rigidity ⁴⁾	Starting torque	Preload ³⁾	Axial rigidity ⁴⁾	Starting torque														
Back-to-back (DB)	Face-to-face (DF)	mm					kN				kgf				mm				DB	DF	kN	kgf	N/μm	kgf/μm	N-mm (approx.)	DB	DBT	N/μm	kgf/μm	N-mm (approx.)	DB	DBT	N/μm	kgf/μm	N-mm (approx.)	DB	DBT				
		d	D	2B	r _{s min⁻¹⁾}	r _{is min⁻¹⁾}	C _a	C _{0a}	C _a	C _{0a}	d ₁	d ₂	D ₁	D ₂	a ₁	a ₂	1-row	2-row																				DF	DFT	DF	DFT
79M6ADB	79M6ADF	6	15	10	0.2	0.1	2.27	2.09	232	213	10.0	8.4	11.1	12.9	11.1	1.1	1	1.83	187	3.66	374	20	2	27	3	37	3.8	55	5.6	0.4	0.6	39	4	53	5.5	48	4.9	67	6.8	1.0	1.1
70M6DB	70M6DF	6	17	12	0.3	0.15	2.96	2.41	300	246	9.8	—	13.2	14.8	12.7	0.7	2	1.01	103	2.02	206	29	3	39	4	37	3.8	53	5.4	0.8	1.0	49	5	67	7	45	4.6	65	6.6	1.5	2.2
79M8ADB	79M8ADF	8	19	12	0.3	0.15	3.25	3.25	330	335	12.6	10.9	14.4	16.4	13.9	1.9	1	2.14	219	4.28	438	29	3	39	4	48	4.9	68	6.9	0.7	0.9	59	6	80	8	62	6.3	88	9.0	1.7	2.3
70M8DB	70M8DF	8	22	14	0.3	0.15	4.85	4.40	495	445	12.8	—	17.2	19.1	15.8	1.8	2	1.53	156	3.06	312	49	5	67	7	52	5.3	75	7.6	1.6	2.2	98	10	133	14	67	6.9	97	9.9	4.0	5.7
7000HTDB	7000HTDF	10	26	16	0.3	0.15	6.75	6.30	690	640	15.5	—	20.3	22.7	18.4	2.4	2	3.10	314	6.20	628	147	15	200	20	82	8.4	116	11.8	7.4	9.7	196	20	266	27	92	9.4	131	13.3	11.0	14.7
7001HTDB	7001HTDF	12	28	16	0.3	0.15	7.35	7.45	750	760	18.1	—	22.9	25.4	20.0	4.0	2	3.25	331	6.50	662	147	15	200	20	88	9.0	125	12.7	7.2	9.5	196	20	266	27	99	10.1	140	14.3	10.8	14.4
7002HTDB	7002HTDF	15	32	18	0.3	0.15	8.45	9.50	860	970	21.1	—	25.9	28.4	22.7	4.7	2	4.00	407	8.00	814	147	15	200	20	100	10.2	141	14.4	6.9	9.1	294	30	400	41	131	13.4	187	19.1	18.1	24.7
7203HTDB	7203HTDF	17	40	24	0.6	0.3	15.2	16.4	1550	1670	25.0	—	32.0	36.2	28.8	4.8	2	5.85	595	11.7	1190	294	30	400	41	126	12.9	180	18.4	20.5	27.9	390	40	530	54	141	14.4	201	20.5	30.5	40.8
7004HTDB	7004HTDF	20	42	24	0.6	0.3	14.1	17.0	1440	1730	28.4	—	34.7	38.1	30.3	6.3	2	7.55	770	15.1	1540	294	30	400	41	139	14.2	199	20.3	19.3	26.2	490	50	665	68	170	17.3	242	24.7	39.3	53.1
7204HTDB	7204HTDF	20	47	28	1.0	0.6	19.8	23.1	2020	2360	30.5	—	38.6	42.7	34.1	6.1	2	9.50	970	19.0	1940	490	50	665	68	168	17.2	240	24.5	41.5	56.1	785	80	1070	109	203	20.7	289	29.5	79.7	108
7205HTDB	7205HTDF	25	52	30	1.0	0.6	22.4	28.8	2280	2940	35.0	—	43.0	47.2	37.7	7.7	2	11.5	1170	23.0	2340	490	50	665	68	188	19.2	269	27.4	39.7	53.7	785	80	1070	109	226	23.1	323	32.9	76.4	104
7206HTDB	7206HTDF	30	62	32	1.0	0.6	31.0	41.5	3150	4200	41.7	—	51.4	56.3	43.1	11.1	2	16.3	1660	32.6	3320	490	50	665	68	197	20.0	281	28.6	41.3	55.8	785	80	1070	109	235	24.0	336	34.2	79.4	108
7207HTDB	7207HTDF	35	72	34	1.1	0.6	41.0	56.0	4200	5750	47.9	—	59.2	64.9	48.2	14.2	2	21.9	2230	43.8	4470	885	90	1200	122	255	26.0	363	37.1	96.4	130	1470	150	2000	204	311	31.7	443	45.2	196	265
7208HTDB	7208HTDF	40	80	36	1.1	0.6	49.0	71.0	5000	7200	54.0	—	66.0	72.2	52.9	16.9	2	27.1	2770	54.2	5540	885	90	1200	122	272	27.8	389	39.6	95.8	129	1470	150	2000	204	331	33.8	473	48.2	195	264


1) Minimum allowable value for corner radius dimension r or r_1 .

2) The number of rows means the number of bearings that bear the axial load.

3) Preloads listed are indicative of bearing combination specified.

4) The axial rigidity indicated is in the axial direction under the specified preload.


Needle roller bearings
with double-direction thrust needle roller bearings AXN type




d 20–50 mm

Part number	Boundary dimensions										Basic load ratings				Basic load ratings				Allowable speed		Radial internal clearance		Abutment and fillet dimensions				Preload	Starting ²⁾ torque	Mass	Part number
											dynamic	static	dynamic	static	dynamic	static	grease lubrication	oil lubrication	μm	min	max	mm				N	N·mm	kg		
											axial	axial	axial	axial	d _a	D _a						r _{as}	r _{las}							
	d	d _w	D	D ₁ -0.20 -0.50	T 0	C 0	F	D _w	r _s min ¹⁾	r _{1s} min ¹⁾	C _r	C _{0r}	C _r	C _{0r}			C _a	C _{0a}	C _a	C _{0a}	min			max	min	max	max	max	(approx.)	
AXN2052	20	20 ^{+0.061 +0.040}	52	42	40	16	25	2	0.6	0.6	15.1	22.4	1 540	2 280	14.6	58.0	1 490	5 900	1 800	7 000	10	30	39	46	0.6	0.6	1 300	330	0.40	AXN2052
AXN2557	25	25 ^{+0.061 +0.040}	57	47	44	20	30	2	0.6	0.6	22.1	34.0	2 260	3 500	16.3	69.5	1 660	7 100	1 500	6 000	10	30	44	51	0.6	0.6	1 450	400	0.52	AXN2557
AXN3062	30	30 ^{+0.061 +0.040}	62	52	44	20	35	2	0.6	0.6	24.8	41.5	2 520	4 250	17.8	81.5	1 820	8 300	1 400	5 500	10	40	50	56	0.6	0.6	1 600	550	0.59	AXN3062
AXN3570	35	35 ^{+0.075 +0.050}	70	60	48	20	40	3	1	0.6	26.4	47.0	2 700	4 800	27.4	110	2 790	11 300	1 200	4 700	10	40	56	64	1	0.6	2 450	900	0.80	AXN3570
AXN4075	40	40 ^{+0.075 +0.050}	75	65	48	20	45	3	1	0.6	28.0	52.5	2 860	5 400	29.8	128	3 050	13 100	1 100	4 300	10	40	62	69	1	0.6	2 650	1 050	0.89	AXN4075
AXN4580	45	45 ^{+0.075 +0.050}	80	70	54	25	50	3	1	0.6	38.5	74.5	3 950	7 550	31.5	143	3 250	14 500	1 000	3 900	10	40	67	74	1	0.6	2 800	1 200	1.00	AXN4580
AXN5090	50	50 ^{+0.075 +0.050}	90	78	54	25	55	3	1	0.6	41.0	82.0	4 150	8 400	38.0	186	3 850	19 000	900	3 500	15	50	75	83	1	0.6	3 400	1 600	1.42	AXN5090

1) Minimum allowable value for corner radius dimension r or r_1 .
2) Starting torque value relative to the standard preload.

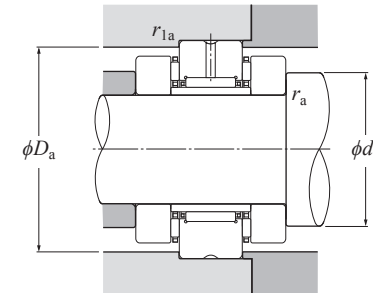


Needle roller bearings
with double-direction thrust cylindrical roller bearings ARN type



d 20–70 mm

Part number	Boundary dimensions										Basic load ratings				Basic load ratings				Allowable speed		Radial internal clearance		Abutment and fillet dimensions				Preload	Starting ²⁾ torque	Mass	Part number
	mm										dynamic	static	dynamic	static	dynamic	static	dynamic	static	min ⁻¹	oil	μm	μm	d _a	D _a	r _{as}	r _{las}	N	N·mm	kg	
	d	d _w	D	D ₁	T	C	F	D _w	r _{s min} ¹⁾	r _{ls min} ¹⁾	C _r	C _{0r}	C _r	C _{0r}	C _a	C _{0a}	C _a	C _{0a}	grease lubrication	oil lubrication	min	max	min	max	max	max	(approx.)	(approx.)	(approx.)	
ARN2052T2	20	20 ^{+0.061 +0.040}	52	42	46	16	25	5	0.6	0.6	15.1	22.4	1 540	2 280	27.3	68.0	2 790	6 900	1 800	7 000	10	30	39	46	0.6	0.6	2 500	430	0.44	ARN2052T2
ARN2062	20	20 ^{+0.061 +0.040}	62	52	60	20	30	7.5	1	0.6	22.1	34.0	2 260	3 500	53.5	129	5 450	13 100	1 500	6 000	10	30	48	56	1	0.6	4 950	1 150	0.91	ARN2062
ARN2557T2	25	25 ^{+0.061 +0.040}	57	47	50	20	30	5	0.6	0.6	22.1	34.0	2 260	3 500	27.8	72.5	2 840	7 400	1 500	6 000	10	30	44	51	0.6	0.6	2 600	500	0.56	ARN2557T2
ARN2572	25	25 ^{+0.061 +0.040}	72	62	60	20	35	7.5	1	0.6	24.8	41.5	2 520	4 250	54.5	139	5 550	14 200	1 200	4 900	10	40	56	66	1	0.6	5 050	1 400	1.22	ARN2572
ARN3062T2	30	30 ^{+0.061 +0.040}	62	52	50	20	35	5	0.6	0.6	24.8	41.5	2 520	4 250	31.0	87.0	3 150	8 900	1 400	5 500	10	40	49	56	0.6	0.6	2 900	650	0.63	ARN3062T2
ARN3080	30	30 ^{+0.061 +0.040}	80	68	66	20	40	9	1	0.6	26.4	47.0	2 700	4 800	74.5	190	7 600	19 400	1 100	4 400	10	40	63	73	1	0.6	6 900	2 100	1.54	ARN3080
ARN3570T2	35	35 ^{+0.075 +0.050}	70	60	54	20	40	6	1	0.6	26.4	47.0	2 700	4 800	43.0	121	4 350	12 400	1 200	4 800	10	40	56	64	1	0.6	3 950	1 050	0.85	ARN3570T2
ARN3585	35	35 ^{+0.075 +0.050}	85	73	66	20	45	9	1	0.6	28.0	52.5	2 860	5 400	82.0	222	8 350	22 600	1 000	4 100	10	40	68	77	1	0.6	7 600	2 500	1.67	ARN3585
ARN4075T2	40	40 ^{+0.075 +0.050}	75	65	54	20	45	6	1	0.6	28.0	52.5	2 860	5 400	45.5	135	4 650	13 800	1 100	4 400	10	40	61	69	1	0.6	4 200	1 250	0.93	ARN4075T2
ARN4090	40	40 ^{+0.075 +0.050}	90	78	75	25	50	9	1	0.6	38.5	74.5	3 950	7 550	85.0	238	8 650	24 200	950	3 800	10	40	73	87	1	0.6	7 850	2 850	2.15	ARN4090
ARN4580T2	45	45 ^{+0.075 +0.050}	80	70	60	25	50	6	1	0.6	38.5	74.5	3 950	7 550	48.5	150	4 900	15 300	1 000	4 000	10	40	66	74	1	0.6	4 450	1 550	1.16	ARN4580T2
ARN45105	45	45 ^{+0.075 +0.050}	105	90	82	25	55	11	1	0.6	41.0	82.0	4 150	8 400	121	340	12 300	34 500	850	3 300	15	50	83	96	1	0.6	11 200	4 350	3.16	ARN45105
ARN5090	50	50 ^{+0.075 +0.050}	90	78	60	25	55	6	1	0.6	41.0	82.0	4 150	8 400	62.5	215	6 350	21 900	900	3 600	15	50	75	83	1	0.6	5 800	2 050	1.48	ARN5090
ARN50110	50	50 ^{+0.075 +0.050}	110	95	82	25	60	11	1.1	0.6	41.0	85.0	4 200	8 700	125	365	12 800	37 000	800	3 100	15	50	88	101	1	0.6	11 600	4 900	3.38	ARN50110
ARN55115	55	55 ^{+0.090 +0.060}	115	100	82	25	65	11	1.1	0.6	45.0	98.0	4 550	10 000	130	385	13 200	39 500	750	2 900	15	50	93	106	1	0.6	12 000	5 500	3.61	ARN55115
ARN60120	60	60 ^{+0.090 +0.060}	120	105	82	25	70	11	1.1	0.6	45.0	91.5	4 600	9 350	134	410	13 700	42 000	700	2 700	15	50	98	111	1	0.6	12 400	6 000	3.81	ARN60120
ARN65125	65	65 ^{+0.090 +0.060}	125	110	82	25	75	11	1.1	0.6	55.0	104	5 600	10 600	138	435	14 100	44 500	650	2 600	15	50	103	116	1	0.6	12 800	6 500	4.00	ARN65125
ARN70130	70	70 ^{+0.090 +0.060}	130	115	82	25	80	11	1.1	0.6	57.0	119	5 800	12 200	142	460	14 500	47 000	650	2 500	15	50	106	121	1	0.6	13 200	7 000	4.25	ARN70130

1) Minimum allowable value for corner radius dimension r or r_1 .
2) Starting torque value relative to the standard preload.

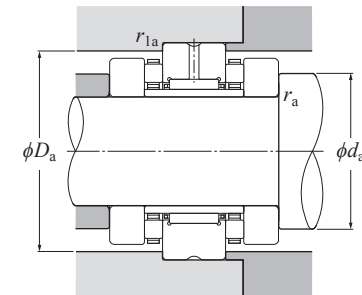

14. Cam Followers for Pallet Changer

Cam followers are often used on work piece transfer systems (such as pallet changers) of machine tools (such as machining centers) to handle the large loads generated by these systems.

NTN offers various types of cam followers that include a ready-to-install cam follower optimized for pallet changers.

14.1 Structure and features

- The outer ring wall thickness is maximized for resistance to heavy load or impact load.
- Feature a compact design and can be easily mounted by tightening a setscrew.
- The outer ring outside diameter, outer ring width, and stud diameter are identical to the dimensions of NTN's standard cam followers (KR type).
- Because are actuated less frequently, they do not need to be relubricated. The oil hole has been deleted.
- Cost is reduced by removing the grease hole and the thread from the stud.


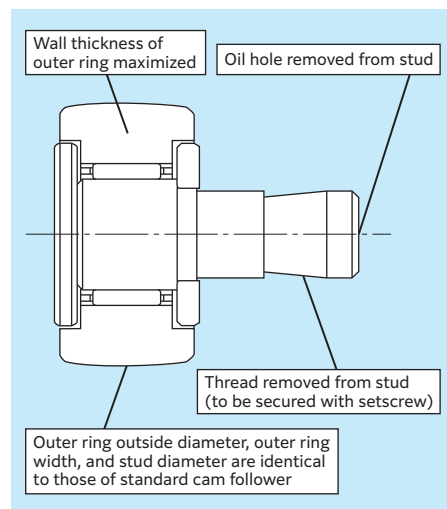


Fig. 14.1 Schematic of NTN pallet changer cam follower

14.2 Cam follower numbering

The part number for cam followers for pallet changers is same as that of NTN special cam followers.

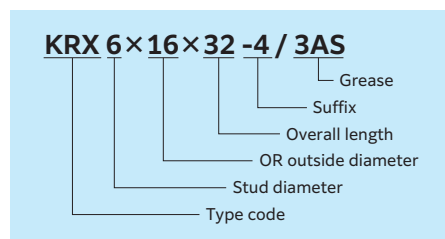

14.3 Accuracy

The accuracy of NTN cam followers for pallet changer is same as that of NTN standard cam followers (JIS Class 0).

14.4 Fits

The NTN pallet changer cam follower has a special stud that is readily secured with a setscrew. As shown example of mounting Fig. 14.2, a setscrew locks the pallet changer cam follower in the axial and circumferential directions.

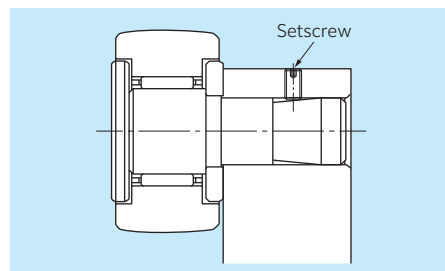


Fig. 14.2 Example of mounting

14.5 Radial internal clearance

The radial clearance of NTN cam followers for pallet changers is same as that of NTN standard cam followers (see Table 14.1).

Table 14.1. Radial internal clearance of cam followers Unit: μm

Nominal roller inscribed circle diameter F_w (mm)		CN (normal clearance)	
over	incl.	min	max
3	6	3	17
6	10	5	20
10	18	5	25
18	30	10	30
30	50	10	40


14.6 Lubrication

NTN cam followers for pallet changers are filled with lithium based grease and can be used in a temperature range of -20 to 120 $^{\circ}\text{C}$ (100 $^{\circ}\text{C}$ or less for continuous use).

Under the assumption that the user does not perform relubrication with grease, the standard NTN pallet changer cam follower does not have an oil hole for relubrication (If necessary, the cam follower can be provided with an oil hole or a hole for mounting a grease nipple).


Upon request, NTN can also provide cam followers with a synthetic rubber seal.

Lubrication between the outside surface of bearing and track is also necessary. Failure to properly lubricate the outside surface of the cam follower could lead to premature wear of the bearing.

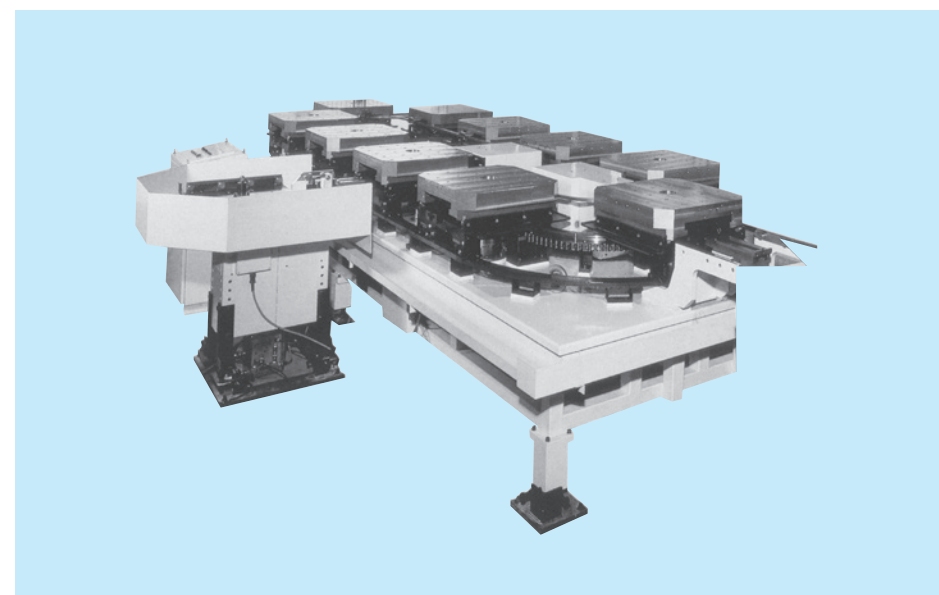

Example application of NTN cam followers for pallet changer (Photo: courtesy of Tsudakoma Corporation)


Cam followers for pallet changers
Sealed KRX type

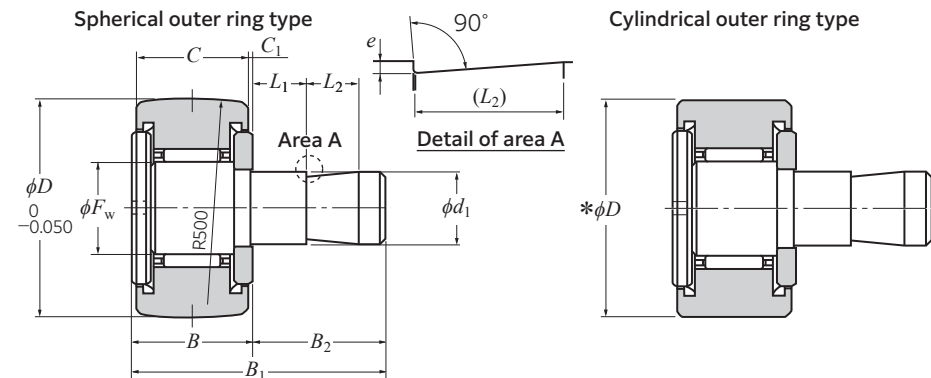

d_1 6–20 mm

Cam follower number				Dimensions mm						Dimensions					Basic load ratings dynamic static		Track load capacity N kgf		Reference dimensions					
Spherical outer ring	Cylindrical outer ring	d_1	Tolerance	D	Tolerance* (cylindrical outer ring)	F_w	B_1	B	B_2	mm					C_r	C_{0r}	spherical outer ring	cylindrical outer ring	mm					
										C	C_1	L_1	L_2	e					B_1	B_2	G	G_1	n	h
KRX 6×16×32-4/3AS	KRX 6×16×32-2/3AS	6	$\begin{smallmatrix} 0 \\ -0.012 \end{smallmatrix}$	16	$\begin{smallmatrix} 0 \\ -0.008 \end{smallmatrix}$	8	32	12	20	11	0.6	5	10	0.3	$\begin{smallmatrix} 4\,050 \\ 415 \end{smallmatrix}$	$\begin{smallmatrix} 4\,200 \\ 430 \end{smallmatrix}$	$\begin{smallmatrix} 1\,080 \\ 110 \end{smallmatrix}$	$\begin{smallmatrix} 3\,400 \\ 350 \end{smallmatrix}$	28	16	M6 ×1	8	—	3
KRX 8×19×32-9/3AS	KRX 8×19×32-7/3AS	8	$\begin{smallmatrix} 0 \\ -0.015 \end{smallmatrix}$	19	$\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$	10	32	12	20	11	0.6	5	10	0.5	$\begin{smallmatrix} 4\,750 \\ 480 \end{smallmatrix}$	$\begin{smallmatrix} 5\,400 \\ 555 \end{smallmatrix}$	$\begin{smallmatrix} 1\,380 \\ 141 \end{smallmatrix}$	$\begin{smallmatrix} 4\,050 \\ 415 \end{smallmatrix}$	32	20	M8 ×1.25	10	—	4
KRX10×22×33-3/3AS	KRX10×22×33-1/3AS	10	$\begin{smallmatrix} 0 \\ -0.015 \end{smallmatrix}$	22	$\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$	12	33	13	20	12	0.6	5	10	0.5	$\begin{smallmatrix} 5\,300 \\ 540 \end{smallmatrix}$	$\begin{smallmatrix} 6\,650 \\ 680 \end{smallmatrix}$	$\begin{smallmatrix} 1\,690 \\ 172 \end{smallmatrix}$	$\begin{smallmatrix} 5\,150 \\ 525 \end{smallmatrix}$	36	23	M10×1.25	12	4	4
KRX10×26×33-4/3AS	KRX10×26×33-2/3AS	10	$\begin{smallmatrix} 0 \\ -0.015 \end{smallmatrix}$	26	$\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$	12	33	13	20	12	0.6	5	10	0.5	$\begin{smallmatrix} 5\,300 \\ 540 \end{smallmatrix}$	$\begin{smallmatrix} 6\,650 \\ 680 \end{smallmatrix}$	$\begin{smallmatrix} 2\,120 \\ 216 \end{smallmatrix}$	$\begin{smallmatrix} 6\,100 \\ 620 \end{smallmatrix}$	36	23	M10×1.25	12	4	4
KRX12×30×35-3/3AS	KRX12×30×35/3AS	12	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	30	$\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$	15	35	15	20	14	0.6	5	10	1.0	$\begin{smallmatrix} 7\,850 \\ 800 \end{smallmatrix}$	$\begin{smallmatrix} 9\,650 \\ 985 \end{smallmatrix}$	$\begin{smallmatrix} 2\,620 \\ 267 \end{smallmatrix}$	$\begin{smallmatrix} 7\,700 \\ 785 \end{smallmatrix}$	40	25	M12×1.5	13	6	6
KRX12×32×35-3/3AS	KRX12×32×35-1/3AS	12	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	32	$\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$	15	35	15	20	14	0.6	5	10	1.0	$\begin{smallmatrix} 7\,850 \\ 800 \end{smallmatrix}$	$\begin{smallmatrix} 9\,650 \\ 985 \end{smallmatrix}$	$\begin{smallmatrix} 2\,860 \\ 291 \end{smallmatrix}$	$\begin{smallmatrix} 8\,200 \\ 835 \end{smallmatrix}$	40	25	M12×1.5	13	6	6
KRX16×35×44.5-1/3AS	KRX16×35×44.5-3/3AS	16	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	35	$\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$	18	44.5	19.5	25	18	0.8	10	10	1.0	$\begin{smallmatrix} 12\,200 \\ 1\,240 \end{smallmatrix}$	$\begin{smallmatrix} 17\,900 \\ 1\,830 \end{smallmatrix}$	$\begin{smallmatrix} 3\,200 \\ 325 \end{smallmatrix}$	$\begin{smallmatrix} 11\,900 \\ 1\,220 \end{smallmatrix}$	52	32.5	M16×1.5	17	6	6
KRX18×40×46.5-6/3AS	KRX18×40×46.5-4/3AS	18	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	40	$\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$	22	46.5	21.5	25	20	0.8	10	10	1.0	$\begin{smallmatrix} 14\,000 \\ 1\,430 \end{smallmatrix}$	$\begin{smallmatrix} 22\,800 \\ 2\,330 \end{smallmatrix}$	$\begin{smallmatrix} 3\,850 \\ 390 \end{smallmatrix}$	$\begin{smallmatrix} 14\,500 \\ 1\,480 \end{smallmatrix}$	58	36.5	M18×1.5	19	6	6
KRX20×47×50.5-1/3AS	KRX20×47×50.5-3/3AS	20	$\begin{smallmatrix} 0 \\ -0.021 \end{smallmatrix}$	47	$\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$	25	50.5	25.5	25	24	0.8	10	10	1.0	$\begin{smallmatrix} 20\,700 \\ 2\,110 \end{smallmatrix}$	$\begin{smallmatrix} 33\,500 \\ 3\,450 \end{smallmatrix}$	$\begin{smallmatrix} 4\,700 \\ 480 \end{smallmatrix}$	$\begin{smallmatrix} 21\,000 \\ 2\,150 \end{smallmatrix}$	66	40.5	M20×1.5	21	8	8
KRX20×52×50.5-3/3AS	KRX20×52×50.5-1/3AS	20	$\begin{smallmatrix} 0 \\ -0.021 \end{smallmatrix}$	52	$\begin{smallmatrix} 0 \\ -0.013 \end{smallmatrix}$	25	50.5	25.5	25	24	0.8	10	10	1.0	$\begin{smallmatrix} 20\,700 \\ 2\,110 \end{smallmatrix}$	$\begin{smallmatrix} 33\,500 \\ 3\,450 \end{smallmatrix}$	$\begin{smallmatrix} 5\,550 \\ 565 \end{smallmatrix}$	$\begin{smallmatrix} 23\,300 \\ 2\,370 \end{smallmatrix}$	66	40.5	M20×1.5	21	8	8

(Reference) Standard cam follower KR··H type (w/ hex socket)

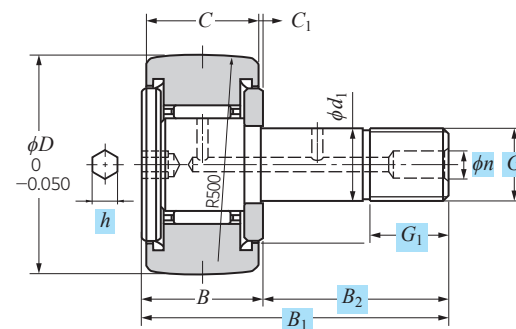

The dimensions of standard cam followers (marked with in the diagram above) are different from those of NTN pallet changer cam followers. Please see the reference dimensions in the table below.

Appendix table-1: Boundary dimensions of radial bearings (Tapered roller bearings not included)-1

Unit: mm

Single row radial ball bearings			67								68								
Double row radial ball bearings											78								
Cylindrical roller bearings												N28	N38	NN48					
Needle roller bearings														NA48					
Spherical roller bearings																			
Nominal bearing bore diameter <i>d</i>			Diameter series 7							Diameter series 8									
			Nominal bearing outside diameter <i>D</i>	Dimension series					Nominal bearing outside diameter <i>D</i>	Dimension series									
				17	27	37	47	17~47		08	18	28	38	48	58	68	08	18~68	
Number	Dimension		Nominal width <i>B</i>				Chamfer dimension <i>r</i> _{s min}		Nominal width <i>B</i>										Chamfer dimension <i>r</i> _{s min}
—	0.6	2	0.8	—	—	—	0.05	2.5	—	1	—	1.4	—	—	—	—	—	0.05	
1	1	2.5	1	—	—	—	0.05	3	—	1	—	1.5	—	—	—	—	—	0.05	
—	1.5	3	1	—	1.8	—	0.05	4	—	1.2	—	2	—	—	—	—	—	0.05	
2	2	4	1.2	—	2	—	0.05	5	—	1.5	—	2.3	—	—	—	—	—	0.08	
—	2.5	5	1.5	1.8	2.3	—	0.08	6	—	1.8	—	2.6	—	—	—	—	—	0.08	
3	3	6	2	2.5	3	—	0.08	7	—	2	—	3	—	—	—	—	—	0.1	
4	4	7	2	2.5	3	—	0.08	9	—	2.5	3.5	4	—	—	—	—	—	0.1	
5	5	8	2	2.5	3	—	0.08	11	—	3	4	5	—	—	—	—	—	0.15	
6	6	10	2.5	3	3.5	—	0.1	13	—	3.5	5	6	—	—	—	—	—	0.15	
7	7	11	2.5	3	3.5	—	0.1	14	—	3.5	5	6	—	—	—	—	—	0.15	
8	8	12	2.5	—	3.5	—	0.1	16	—	4	5	6	8	—	—	—	—	0.2	
9	9	14	3	—	4.5	—	0.1	17	—	4	5	6	8	—	—	—	—	0.2	
00	10	15	3	—	4.5	—	0.1	19	—	5	6	7	9	—	—	—	—	0.3	
01	12	18	4	—	5	—	0.2	21	—	5	6	7	9	—	—	—	—	0.3	
02	15	21	4	—	5	—	0.2	24	—	5	6	7	9	—	—	—	—	0.3	
03	17	23	4	—	5	—	0.2	26	—	5	6	7	9	—	—	—	—	0.3	
04	20	27	4	—	5	7	0.2	32	4	7	8	10	12	16	22	0.3	0.3		
/22	22	30	4	—	5	7	0.2	34	4	7	—	10	—	16	22	0.3	0.3		
05	25	32	4	—	5	7	0.2	37	4	7	8	10	12	16	22	0.3	0.3		
/28	28	35	4	—	5	7	0.2	40	4	7	—	10	—	16	22	0.3	0.3		
06	30	37	4	—	5	7	0.2	42	4	7	8	10	12	16	22	0.3	0.3		
/32	32	40	4	—	6	8	0.2	44	4	7	—	10	—	16	22	0.3	0.3		
07	35	44	5	—	7	9	0.3	47	4	7	8	10	12	16	22	0.3	0.3		
08	40	50	6	—	8	10	0.3	52	4	7	8	10	12	16	22	0.3	0.3		
09	45	55	6	—	8	10	0.3	58	4	7	8	10	13	18	23	0.3	0.3		
10	50	62	6	—	10	12	0.3	65	5	7	10	12	15	20	27	0.3	0.3		
11	55	68	7	—	10	13	0.3	72	7	9	11	13	17	23	30	0.3	0.3		
12	60	75	7	—	12	15	0.3	78	7	10	12	14	18	24	32	0.3	0.3		
13	65	80	7	—	12	15	0.3	85	7	10	13	15	20	27	36	0.3	0.6		
14	70	85	7	—	12	15	0.3	90	8	10	13	15	20	27	36	0.3	0.6		
15	75	90	7	—	12	15	0.3	95	8	10	13	15	20	27	36	0.3	0.6		
16	80	95	7	—	12	15	0.3	100	8	10	13	15	20	27	36	0.3	0.6		
17	85	105	10	—	15	—	0.6	110	9	13	16	19	25	34	45	0.3	1		
18	90	110	10	—	15	—	0.6	115	9	13	16	19	25	34	45	0.3	1		
19	95	115	10	—	15	—	0.6	120	9	13	16	19	25	34	45	0.3	1		
20	100	120	10	—	15	—	0.6	125	9	13	16	19	25	34	45	0.3	1		
21	105	125	10	—	15	—	0.6	130	9	13	16	19	25	34	45	0.3	1		
22	110	135	13	—	19	—	1	140	10	16	19	23	30	40	54	0.6	1		
24	120	145	13	—	19	—	1	150	10	16	19	23	30	40	54	0.6	1		
26	130	160	16	—	23	—	1	165	11	18	22	26	35	46	63	0.6	1.1		
28	140	170	16	—	23	—	1	175	11	18	22	26	35	46	63	0.6	1.1		
30	150	180	16	—	23	—	1	190	13	20	24	30	40	54	71	0.6	1.1		
32	160	190	16	—	23	—	1	200	13	20	24	30	40	54	71	0.6	1.1		
34	170	200	16	—	23	—	1	215	14	22	27	34	45	60	80	0.6	1.1		

Appendix table-1: Boundary dimensions of radial bearings (Tapered roller bearings not included)-2

Unit: mm

Single row radial ball bearings																160	60														
Double row radial ball bearings																															
Cylindrical roller bearings		N19	N29	NN39	NN49												N10	N20	NN30	NN40											
Needle roller bearings					NA49	NA59	NA69																								
Spherical roller bearings					239	249													230	240											
Nominal bearing bore diameter	Diameter series 9														Diameter series 0																
Number	Dimension	Nominal bearing outside diameter <i>D</i>	Dimension series										Nominal bearing outside diameter <i>D</i>	Dimension series																	
			09	19	29	39	49	59	69	09	19~39	49~69		00	10	20	30	40	50	60	00	10~60									
			Nominal width <i>B</i>										Chamfer dimension <i>r</i> _{s min}					Nominal width <i>B</i>										Chamfer dimension <i>r</i> _{s min}			
—	0.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1	1	4	—	1.6	—	2.3	—	—	—	—	0.15	—	—	6	—	2.5	—	3	—	—	—	—	—	—	—	—	—	—	—	—	0.15
2	2	6	—	2.3	—	3	—	—	—	—	0.15	—	7	—	2.8	—	3.5	—	—	—	—	—	—	—	—	—	—	—	—	—	0.15
—	2.5	7	—	2.5	—	3.5	—	—	—	—	0.15	—	8	—	2.8	—	4	—	—	—	—	—	—	—	—	—	—	—	—	—	0.15
3	3	8	—	3	—	4	—	—	—	—	0.15	—	9	—	3	—	5	—	—	—	—	—	—	—	—	—	—	—	—	—	0.15
4	4	11	—	4	—	5	—	—	—	—	0.15	—	12	—	4	—	6	—	—	—	—	—	—	—	—	—	—	—	—	—	0.2
5	5	13	—	4	—	6	10	—	—	—	0.2	0.15	14	—	5	—	7	—	—	—	—	—	—	—	—	—	—	—	—	—	0.2
6	6	15	—	5	—	7	10	—	—	—	0.2	0.15	17	—	6	—	9	—	—	—	—	—	—	—	—	—	—	—	—	—	0.3
7	7	17	—	5	—	7	10	—	—	—	0.3	0.15	19	—	6	8	10	—	—	—	—	—	—	—	—	—	—	—	—	—	0.3
8	8	19	—	6	—	9	11	—	—	—	0.3	0.2	22	—	7	9	11	14	19	25	—	—	—	—	—	—	—	—	—	—	0.3
9	9	20	—	6	—	9	11	—	—	—	0.3	0.3	24	—	7	10	12	15	20	27	—	—	—	—	—	—	—	—	—	—	0.3
00	10	22	—	6	8	10	13	16	22	—	0.3	0.3	26	—	8	10	12	16	21	29	—	—	—	—	—	—	—	—	—	—	0.3
01	12	24	—	6	8	10	13	16	22	—	0.3	0.3	28	7	8	10	12	16	21	29	0.3	0.3	—	—	—	—	—	—	—	—	—
02	15	28	—	7	8.5	10	13	18	23	—	0.3	0.3	32	8	9	11	13	17	23	30	0.3	0.3	—	—	—	—	—	—	—	—	—
03	17	30	—	7	8.5	10	13	18	23	—	0.3	0.3	35	8	10	12	14	18	24	32	0.3	0.3	—	—	—	—	—	—	—	—	—
04	20	37	7	9	11	13	17	23	30	0.3	0.3	0.3	42	8	12	14	16	22	30	40	0.3	0.6	—	—	—	—	—	—	—	—	—
/22	22	39	7	9	11	13	17	23	30	0.3	0.3	0.3	44	8	12	14	16	22	30	40	0.3	0.6	—	—	—	—	—	—	—	—	—
05	25	42	7	9	11	13	17	23	30	0.3	0.3	0.3	47	8	12	14	16	22	30	40	0.3	0.6	—	—	—	—	—	—	—	—	—
/28	28	45	7	9	11	13	17	23	30	0.3	0.3	0.3	52	8	12	15	18	24	32	43	0.3	0.6	—	—	—	—	—	—	—	—	—
06	30	47	7	9	11	13	17	23	30	0.3	0.3	0.3	55	9	13	16	19	25	34	45	0.3	1	—	—	—	—	—	—	—	—	—
/32	32	52	7	10	13	15	20	27	36	0.3	0.6	0.6	58	9	13	16	20	26	35	47	0.3	1	—	—	—	—	—	—	—	—	—
07	35	55	7	10	13	15	20	27	36	0.3	0.6	0.6	62	9	14	17	20	27	36	48	0.3	1	—	—	—	—	—	—	—	—	—
08	40	62	8	12	14	16	22	30	40	0.3	0.6	0.6	68	9	15	18	21	28	38	50	0.3	1	—	—	—	—	—	—	—	—	—
09	45	68	8	12	14	16	22	30	40	0.3	0.6	0.6	75	10	16	19	23	30	40	54	0.3	1	—	—	—	—	—	—	—	—	—
10	50	72	8	12	14	16	22	30	40	0.3	0.6	0.6	80	10	16	19	23	30	40	54	0.6	1	—	—	—	—	—	—	—	—	—
11	55	80	9	13	16	19	25	34	45	0.3	1	1	90	11	18	22	26	35	46	63	0.6	1.1	—	—	—	—	—	—	—	—	—
12	60	85	9	13	16	19	25	34	45	0.3	1	1	95	11	18	22	26	35	46	63	0.6	1.1	—	—	—	—	—	—	—	—	—
13	65	90	9	13	16	19	25	34	45	0.6	1	1	100	11	18	22	26	35	46	63	0.6	1.1	—	—	—	—	—	—	—	—	—
14	70	100	10	16	19	23	30	40	54	0.6	1	1	110	13	20	24	30	40	54	71	0.6	1.1	—	—	—	—	—	—	—	—	—
15	75	105	10	16	19	23	30	40	54	0.6	1	1	115	13	20	24	30	40	54	71	0.6	1.1	—	—	—	—	—	—	—	—	—
16	80	110	10	16	19	23	30	40	54	0.6	1	1	125	14	22	27	34	45	60	80	0.6	1.1	—	—	—	—	—	—	—	—	—
17	85	120	11	18	22	26	35	46	63	0.6	1.1	1.1	130	14	22	27	34	45	60	80	0.6	1.1	—	—	—	—	—	—	—	—	—
18	90	125	11	18	22	26	35	46	63	0.6	1.1	1.1	140	16	24	30	37	50	67	90	1	1.5	—	—	—	—	—	—	—	—	—
19	95	130	11	18	22	26	35	46	63	0.6	1.1	1.1	145	16	24	30	37	50	67	90	1	1.5	—	—	—	—	—	—	—	—	—
20	100	140	13	20	24	30	40	54	71	0.6	1.1	1.1	150	16	24	30	37	50	67	100	1	1.5	—	—	—	—	—	—	—	—	—
21	105	145	13	20	24	30	40	54	71	0.6	1.1	1.1	160	18	26	33	41	56	75	109	1	2	—	—	—	—	—	—	—	—	—
22	110	150	13	20	24	30	40	54	71	0.6	1.1	1.1	170	19	28	36	45	60	80	109	1	2	—	—	—	—	—	—	—	—	—
24	120	165	14	22	27	34	45	60	80	0.6	1.1	1.1	180	19	28	36	46	60	80	109	1	2	—	—	—	—	—	—	—	—	—
26	130	180	16	24	30	37	50	67	90	1	1.5	1.5	200	22	33	42	52	69	95	125	1.1	2	—	—	—	—	—	—	—	—	—
28	140	190	16	24	30	37	50	67	90	1	1.5	1.5	210	22	33	42	53	69	95	125	1.1	2	—	—	—	—	—	—	—	—	—
30	150	210	19	28	36	45	60	80	109	1	2	2	225	24	35	45	56	75	100	136	1.1	2.1	—	—	—	—	—	—	—	—	—
32	160	220	19	28	36	45	60	80	109	1	2	2	240	25	38	48	60	80	109	145	1.5	2.1	—	—	—	—	—	—	—	—	—
34	170	230	19	28	36	45	60	80	109	1	2	2	260	28	42	54	67	90	122	160	1.5	2.1	—	—	—	—	—	—	—	—	—

NTN

Unit: mm

Single row radial ball bearings		67								68 78								
Double row radial ball bearings																		
Cylindrical roller bearings											N28	N38	NN48					
Needle roller bearings													NA48					
Spherical roller bearings																		
Nominal bearing bore diameter <i>d</i>		Diameter series 7						Diameter series 8										
		Nominal bearing outside diameter <i>D</i>	Dimension series					Nominal bearing outside diameter <i>D</i>	Dimension series									Chamfer dimension <i>r</i> 's min
17	27		37	47	17~47	08	18		28	38	48	58	68	08	18~68			
Number	Dimension		Nominal width <i>B</i>						Nominal width <i>B</i>									Chamfer dimension <i>r</i> 's min
36	180	215	18	—	26	—	1.1	225	14	22	27	34	45	60	80	0.6	1.1	
38	190	230	20	—	30	—	1.1	240	16	24	30	37	50	67	90	1	1.5	
40	200	240	20	—	30	—	1.1	250	16	24	30	37	50	67	90	1	1.5	
44	220	—	—	—	—	—	—	270	16	24	30	37	50	67	90	1	1.5	
48	240	—	—	—	—	—	—	300	19	28	36	45	60	80	100	1	2	
52	260	—	—	—	—	—	—	320	19	28	36	45	60	80	100	1	2	
56	280	—	—	—	—	—	—	350	22	33	42	52	69	95	125	1.1	2	
60	300	—	—	—	—	—	—	380	25	38	48	60	80	109	145	1.5	2.1	
64	320	—	—	—	—	—	—	400	25	38	48	60	80	109	145	1.5	2.1	
68	340	—	—	—	—	—	—	420	25	38	48	60	80	109	145	1.5	2.1	
72	360	—	—	—	—	—	—	440	25	38	48	60	80	109	145	1.5	2.1	
76	380	—	—	—	—	—	—	480	31	46	60	75	100	136	180	2	2.1	
80	400	—	—	—	—	—	—	500	31	46	60	75	100	136	180	2	2.1	
84	420	—	—	—	—	—	—	520	31	46	60	75	100	136	180	2	2.1	
88	440	—	—	—	—	—	—	540	31	46	60	75	100	136	180	2	2.1	
92	460	—	—	—	—	—	—	580	37	56	72	90	118	160	218	2.1	3	
96	480	—	—	—	—	—	—	600	37	56	72	90	118	160	218	2.1	3	
/500	500	—	—	—	—	—	—	620	37	56	72	90	118	160	218	2.1	3	
/530	530	—	—	—	—	—	—	650	37	56	72	90	118	160	218	2.1	3	
/560	560	—	—	—	—	—	—	680	37	56	72	90	118	160	218	2.1	3	
/600	600	—	—	—	—	—	—	730	42	60	78	98	128	175	236	3	3	
/630	630	—	—	—	—	—	—	780	48	69	88	112	150	200	272	3	4	
/670	670	—	—	—	—	—	—	820	48	69	88	112	150	200	272	3	4	
/710	710	—	—	—	—	—	—	870	50	74	95	118	160	218	290	4	4	
/750	750	—	—	—	—	—	—	920	54	78	100	128	170	230	308	4	5	
/800	800	—	—	—	—	—	—	980	57	82	106	136	180	243	325	4	5	
/850	850	—	—	—	—	—	—	1 030	57	82	106	136	180	243	325	4	5	
/900	900	—	—	—	—	—	—	1 090	60	85	112	140	190	258	345	5	5	
/950	950	—	—	—	—	—	—	1 150	63	88	118	150	200	272	355	5	5	
/1000	1 000	—	—	—	—	—	—	1 220	71	90	128	165	218	300	400	5	6	
/1060	1 060	—	—	—	—	—	—	1 280	71	100	128	165	218	300	400	5	6	
/1120	1 120	—	—	—	—	—	—	1 360	78	106	140	180	243	325	438	5	6	
/1180	1 180	—	—	—	—	—	—	1 420	78	106	140	180	243	325	438	5	6	
/1250	1 250	—	—	—	—	—	—	1 500	80	112	145	185	250	335	450	6	6	
/1320	1 320	—	—	—	—	—	—	1 600	88	122	165	206	280	375	500	6	6	
/1400	1 400	—	—	—	—	—	—	1 700	95	132	175	224	300	400	545	6	7.5	
/1500	1 500	—	—	—	—	—	—	1 820	—	140	185	243	315	—	—	—	7.5	
/1600	1 600	—	—	—	—	—	—	1 950	—	155	200	265	345	—	—	—	7.5	
/1700	1 700	—	—	—	—	—	—	2 060	—	160	206	272	355	—	—	—	7.5	
/1800	1 800	—	—	—	—	—	—	2 180	—	165	218	290	375	—	—	—	9.5	
/1900	1 900	—	—	—	—	—	—	2 300	—	175	230	300	400	—	—	—	9.5	
/2000	2 000	—	—	—	—	—	—	2 430	—	190	250	325	425	—	—	—	9.5	

- NTN

Unit: mm

Single row radial ball bearings			69											160	60																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
---------------------------------	--	--	----	--	--	--	--	--	--	--	--	--	--	-----	----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Appendix table-1: Boundary dimensions of radial bearings (Tapered roller bearings not included)-5

Unit: mm

Single row radial ball bearings														$\frac{92}{22}$		622		632							
Double row radial ball bearings														12		$\frac{42}{22}$		$\frac{52}{32}$							
Cylindrical roller bearings														N2		N22		N32							
Needle roller bearings																									
Spherical roller bearings																		222		232					
Nominal bearing bore diameter d		Nominal bearing outside diameter D	Diameter series 1										Diameter series 2												
			Dimension series										Nominal bearing outside diameter D	Dimension series											
Number	Dimension		01	11	21	31	41	51	61	01	11-61			82	02	12	22	32	42	52	62	82	02-62		
			Nominal width B							Chamfer dimension r_s min	Nominal width B							Chamfer dimension r_s min							
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
3	3	—	—	—	—	—	—	—	—	—	—	10	2.5	4	—	—	5	—	—	—	0.1	0.15			
4	4	—	—	—	—	—	—	—	—	—	—	13	3	5	—	—	7	—	—	—	0.15	0.2			
5	5	15	—	—	—	7	—	—	—	—	0.3	16	3.5	5	—	—	8	—	—	—	0.15	0.3			
6	6	18	—	—	8	10	—	—	—	—	0.3	19	4	6	—	—	10	—	18	23	0.2	0.3			
7	7	21	—	—	9	11	14	19	25	—	0.3	22	5	7	—	—	11	—	20	27	0.3	0.3			
8	8	23	—	—	10	12	15	20	27	—	0.3	24	5	8	—	—	12	—	21	29	0.3	0.3			
9	9	25	—	—	10	12	16	21	29	—	0.3	26	6	8	—	—	13	—	23	30	0.3	0.3			
00	10	28	—	—	12	14	18	24	32	—	0.3	30	7	9	—	14	14.3	—	27	36	0.3	0.6			
01	12	30	—	—	12	14	18	24	32	—	0.3	32	7	10	—	14	15.9	—	27	36	0.3	0.6			
02	15	33	—	—	12	14	18	24	32	—	0.3	35	8	11	—	14	15.9	20	27	36	0.3	0.6			
03	17	37	—	—	13	15	20	27	36	—	0.6	40	8	12	—	16	17.5	22	30	40	0.3	0.6			
04	20	44	—	—	15	18	24	32	43	—	0.6	47	9	14	—	18	20.6	27	36	48	0.3	1			
/22	22	47	—	—	16	19	25	34	45	—	1	50	9	14	—	18	20.6	27	36	48	0.3	1			
05	25	50	—	—	16	19	25	34	45	—	1	52	10	15	—	18	20.6	27	36	48	0.3	1			
/28	28	55	—	—	17	20	27	36	48	—	1	58	10	16	—	19	23	30	40	54	0.6	1			
06	30	58	—	—	18	21	28	38	50	—	1	62	10	16	—	20	23.8	32	43	58	0.6	1			
/32	32	62	—	—	19	23	30	40	54	—	1	65	11	17	—	21	25	33	43	60	0.6	1			
07	35	68	—	—	21	25	33	43	60	—	1.1	72	12	17	—	23	27	37	50	67	0.6	1.1			
08	40	75	—	—	22	26	35	46	63	—	1.1	80	13	18	—	23	30.2	40	54	71	0.6	1.1			
09	45	80	—	—	22	26	35	46	63	—	1.1	85	13	19	—	23	30.2	40	54	71	0.6	1.1			
10	50	85	—	—	22	26	35	46	63	—	1.1	90	13	20	—	23	30.2	40	54	71	0.6	1.1			
11	55	90	—	—	24	30	40	54	71	—	1.1	100	14	21	—	25	33.3	45	60	80	0.6	1.5			
12	60	100	—	—	24	30	40	54	71	—	1.1	110	16	22	—	28	36.5	50	67	90	1	1.5			
13	65	110	—	—	27	34	45	60	80	—	1.5	120	18	23	—	31	38.1	56	75	100	1	1.5			
14	70	115	—	—	27	34	45	60	80	—	1.5	125	18	24	—	31	39.7	56	75	100	1	1.5			
15	75	125	—	—	30	37	50	67	90	—	1.5	130	18	25	—	31	41.3	56	75	100	1	1.5			
16	80	130	—	—	30	37	50	67	90	—	1.5	140	19	26	—	33	44.4	60	80	109	1	2			
17	85	140	—	—	31	41	56	75	100	—	1.5	150	21	28	—	36	49.2	65	88	118	1.1	2			
18	90	150	—	—	33	45	60	80	109	—	2	160	22	30	—	40	52.4	69	95	125	1.1	2			
19	95	160	—	—	39	52	65	88	118	—	2	170	24	32	—	43	55.6	75	100	136	1.1	2.1			
20	100	165	21	30	39	52	65	88	118	1.1	2	180	25	34	—	46	60.3	80	109	145	1.5	2.1			
21	105	175	22	33	42	56	69	95	125	1.1	2	190	27	36	—	50	65.1	85	115	155	1.5	2.1			
22	110	180	22	33	42	56	69	95	125	1.1	2	200	28	38	—	53	69.8	90	122	160	1.5	2.1			
24	120	200	25	38	48	62	80	109	145	1.5	2	215	—	40	42	58	76	95	128	170	—	2.1			
26	130	210	25	38	48	64	80	109	145	1.5	2	230	—	40	46	64	80	100	136	180	—	3			
28	140	225	27	40	50	68	85	115	155	1.5	2.1	250	—	42	50	68	88	109	150	200	—	3			

Appendix table-1: Boundary dimensions of radial bearings (Tapered roller bearings not included)-6 Unit: mm

Unit: mm

Single row radial ball bearings											63			623			633						64						Unit: mm		
Double row radial ball bearings											13			43			53														
Cylindrical roller bearings											N3			N23			N33						N4								
Needle roller bearings																															
Spherical roller bearings											213			223																	
Nominal bearing bore diameter <i>d</i>			Diameter series 3											Diameter series 4																	
			Nominal bearing outside diameter <i>D</i>	Dimension series							Nominal bearing outside diameter <i>D</i>	Dimension series				Chamfer dimension <i>r</i> _{s min}															
				83	03	13	23	33	83	03-33		04	24																		
Number	Dimension		Nominal width <i>B</i>							Nominal width <i>B</i>				Chamfer dimension <i>r</i> _{s min}																	
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
3	3	13	—	5	—	—	—	7	—	0.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
4	4	16	—	5	—	—	—	9	—	0.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
5	5	19	—	6	—	—	—	10	—	0.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
6	6	22	—	7	—	—	—	11	13	—	0.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
7	7	26	—	9	—	—	—	13	15	—	0.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
8	8	28	—	9	—	—	—	13	15	—	0.3	30	10	14	0.6	—	—	—	—	—	—	—	—	—	—	—	—	—			
9	9	30	—	10	—	—	—	14	16	—	0.6	32	11	15	0.6	—	—	—	—	—	—	—	—	—	—	—	—	—			
00	10	35	9	11	—	—	—	17	19	0.3	0.6	37	12	16	0.6	—	—	—	—	—	—	—	—	—	—	—	—	—			
01	12	37	9	12	—	—	—	17	19	0.3	1	42	13	19	1	—	—	—	—	—	—	—	—	—	—	—	—	—			
02	15	42	9	13	—	—	—	17	19	0.3	1	52	15	24	1.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
03	17	47	10	14	—	—	—	19	22.2	0.6	1	62	17	29	1.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
04	20	52	10	15	—	—	—	21	22.2	0.6	1.1	72	19	33	1.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
/22	22	56	11	16	—	—	—	21	25	0.6	1.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
05	25	62	12	17	—	—	—	24	25.4	0.6	1.1	80	21	36	1.5	—	—	—	—	—	—	—	—	—	—	—	—	—			
/28	28	68	13	18	—	—	—	24	30	0.6	1.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
06	30	72	13	19	—	—	—	27	30.2	0.6	1.1	90	23	40	1.5	—	—	—	—	—	—	—	—	—	—	—	—	—			
/32	32	75	14	20	—	—	—	28	32	0.6	1.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
07	35	80	14	21	—	—	—	31	34.9	0.6	1.5	100	25	43	1.5	—	—	—	—	—	—	—	—	—	—	—	—	—			
08	40	90	16	23	—	—	—	33	36.5	1	1.5	110	27	46	2	—	—	—	—	—	—	—	—	—	—	—	—	—			
09	45	100	17	25	—	—	—	36	39.7	1	1.5	120	29	50	2	—	—	—	—	—	—	—	—	—	—	—	—	—			
10	50	110	19	27	—	—	—	40	44.4	1	2	130	31	53	2.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
11	55	120	21	29	—	—	—	43	49.2	1.1	2	140	33	57	2.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
12	60	130	22	31	—	—	—	46	54	1.1	2.1	150	35	60	2.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
13	65	140	24	33	—	—	—	48	58.7	1.1	2.1	160	37	64	2.1	—	—	—	—	—	—	—	—	—	—	—	—	—			
14	70	150	25	35	—	—	—	51	63.5	1.5	2.1	180	42	74	3	—	—	—	—	—	—	—	—	—	—	—	—	—			
15	75	160	27	37	—	—	—	55	68.3	1.5	2.1	190	45	77	3	—	—	—	—	—	—	—	—	—	—	—	—	—			
16	80	170	28	39	—	—	—	58	68.3	1.5	2.1	200	48	80	3	—	—	—	—	—	—	—	—	—	—	—	—	—			
17	85	180	30	41	—	—	—	60	73	2	3	210	52	86	4	—	—	—	—	—	—	—	—	—	—	—	—	—			
18	90	190	30	43	—	—	—	64	73	2	3	225	54	90	4	—	—	—	—	—	—	—	—	—	—	—	—	—			
19	95	200	33	45	—	—	—	67	77.8	2	3	240	55	95	4	—	—	—	—	—	—	—	—	—	—	—	—	—			
20	100	215	36	47	51	—	—	73	82.6	2.1	3	250	58	98	4	—	—	—	—	—	—	—	—	—	—	—	—	—			
21	105	225	37	49	53	—	—	77	87.3	2.1	3	260	60	100	4	—	—	—	—	—	—	—	—	—	—	—	—	—			
22	110	240	42	50	57	—	—	80	92.1	3	3	280	65	108	4	—	—	—	—	—	—	—	—	—	—	—	—	—			
24	120	260	44	55	62	—	—	86	106	3	3	310	72	118	5	—	—	—	—	—	—	—	—	—	—	—	—	—			
26	130	280	48	58	66	—	—	93	112	3	4	340	78	128	5	—	—	—	—	—	—	—	—	—	—	—	—	—			
28	140	300	50	62	70	—	—	102	118	4	4	360	82	132	5	—	—	—	—	—	—	—	—	—	—	—	—	—			

Appendix table-1: Boundary dimensions of radial bearings (Tapered roller bearings not included)-7

Unit: mm

[illegible]

Appendix table-1: Boundary dimensions of radial bearings (Tapered roller bearings not included)-8

Unit: mm

Single row radial ball bearings			63		623		633				64				
Double row radial ball bearings			13		43		53								
Cylindrical roller bearings			N3		N23		N33				N4				
Needle roller bearings															
Spherical roller bearings			213		223										
Nominal bearing bore diameter <i>d</i>			Diameter series 3								Diameter series 4				
			Nominal bearing outside diameter <i>D</i>	Dimension series						Nominal bearing outside diameter <i>D</i>	Dimension series			Chamfer dimension <i>r</i> _s min	
				83	03	13	23	33	83		03-33	04	24		Nominal width <i>B</i>
Number	Dimension		Nominal width <i>B</i>						Chamfer dimension <i>r</i> _s min						
30	150	320	—	65	75	108	128	—	4	380	85	138	5		
32	160	340	—	68	79	114	136	—	4	400	88	142	5		
34	170	360	—	72	84	120	140	—	4	420	92	145	5		
36	180	380	—	75	88	126	150	—	4	440	95	150	6		
38	190	400	—	78	92	132	155	—	5	460	98	155	6		
40	200	420	—	80	97	138	165	—	5	480	102	160	6		
44	220	460	—	88	106	145	180	—	5	540	115	180	6		
48	240	500	—	95	114	155	195	—	5	580	122	190	6		
52	260	540	—	102	123	165	206	—	6	620	132	206	7.5		
56	280	580	—	108	132	175	224	—	6	670	140	224	7.5		
60	300	620	—	109	140	185	236	—	7.5	710	150	236	7.5		
64	320	670	—	112	155	200	258	—	7.5	750	155	250	9.5		
68	340	710	—	118	165	212	272	—	7.5	800	164	265	9.5		
72	360	750	—	125	170	224	290	—	7.5	850	180	280	9.5		
76	380	780	—	128	175	230	300	—	7.5	900	190	300	9.5		
80	400	820	—	136	185	243	308	—	7.5	950	200	315	12		
84	420	850	—	136	190	250	315	—	9.5	980	206	325	12		
88	440	900	—	145	200	265	345	—	9.5	1 030	212	335	12		
92	460	950	—	155	212	280	365	—	9.5	1 060	218	345	12		
96	480	980	—	160	218	290	375	—	9.5	1 120	230	365	15		
/500	500	1 030	—	170	230	300	388	—	12	1 150	236	375	15		
/530	530	1 090	—	180	243	325	412	—	12	1 220	250	400	15		
/560	560	1 150	—	190	258	335	438	—	12	1 280	258	412	15		
/600	600	1 220	—	200	272	355	462	—	15	1 360	272	438	15		
/630	630	1 280	—	206	280	375	488	—	15	1 420	280	450	15		
/670	670	1 360	—	218	300	400	515	—	15	1 500	290	475	15		
/710	710	1 420	—	224	308	412	530	—	15	—	—	—	—		
/750	750	1 500	—	236	325	438	560	—	15	—	—	—	—		
/800	800	1 600	—	258	355	462	600	—	15	—	—	—	—		
/850	850	1 700	—	272	375	488	630	—	19	—	—	—	—		
/900	900	1 780	—	280	388	500	650	—	19	—	—	—	—		
/950	950	1 850	—	290	400	515	670	—	19	—	—	—	—		
/1000	1 000	1 950	—	300	412	545	710	—	19	—	—	—	—		
/1060	1 060	—	—	—	—	—	—	—	—	—	—	—	—		
/1120	1 120	—	—	—	—	—	—	—	—	—	—	—	—		
/1180	1 180	—	—	—	—	—	—	—	—	—	—	—	—		
/1250	1 250	—	—	—	—	—	—	—	—	—	—	—	—		
/1320	1 320	—	—	—	—	—	—	—	—	—	—	—	—		
/1400	1 400	—	—	—	—	—	—	—	—	—	—	—	—		
/1500	1 500	—	—	—	—	—	—	—	—	—	—	—	—		

Appendix table-2: Comparison table of SI and CGS series gravity units-1

Unit system	Quantity	Length L	Mass M	Time T	Acceleration	Force	Stress	Pressure	Energy
SI		m	kg	s	m/s ²	N	Pa	Pa	J
CGS system		cm	g	s	Gal	dyn	dyn/cm ²	dyn/cm ²	erg
Gravitation system		m	kgf·s ² /m	s	m/s ²	kgf	kgf/m ²	kgf/m ²	kgf·m

Appendix table-3: SI-customary unit conversion table-1

Quantity	Unit designation	Code	Conversion rate to SI	SI unit designation	Code
Angle	Degree	°	$\pi/180$	Radian	rad
	Minute	'	$\pi/10\ 800$		
	Second	"(sec)	$\pi/648\ 000$		
Length	Meter	m	1	Meter	m
	Micron	μ	10^{-6}		
	Angstrom	Å	10^{-10}		
Area	Square meter	m ²	1	Square meter	m ²
	Are	a	10^2		
	Hectare	ha	10^4		
Volume	Cubic meter	m ³	1	Cubic meter	m ³
	Liter	ℓ, L	10^{-3}		
Mass	Kilogram	kg	1	Kilogram	kg
	Ton	t	10^3		
	Kilogram force / square second per meter	kgf·s ² /m	9.806 65		
Time	Second	s	1	Second	s
	Minute	min	60		
	Hour	h	3 600		
	Day	d	86 400		
Speed	Meters per second	m/s	1	Meters per second	m/s
	Knot	kn	1 852/3 600		
Frequency and vibration	Cycle	s ⁻¹ (pps)	1	Hertz	Hz
Revolutions (rotational speed)	Revolutions per minute (rpm)	rpm (r/min)	1/60	Per second	s ⁻¹
Angular velocity	Radians per second	rad/s	1	Radians per second	rad/s
Acceleration	Meters per square second	m/s ²	1	Radians per second	m/s ²
	G	G	9.806 65		
Force	Kilogram force	kgf	9.806 65	Newton	N
	Ton force	tf	9 806.65		
	Dyne	dyn	10^{-5}		
Force moment	Kilogram force / meter	kgf·m	9.806 65	Newton meter	N·m
Inertia moment	Kilogram force / meter / square second	kgf·m·s ⁻²	9.806 65	Kilogram / square meter	kg·m ⁻²
Stress	Kilogram force per square meter	kgf/m ²	9.806 65	Pascal or newton per square meter	Pa or N/m ²
Pressure	Kilogram force per square meter	kgf/m ²	9.806 65	Pascal	Pa
	Meter water column	mH ₂ O	9 806.65		
	Meter of mercury	mHg	101 325/0.76		
	Torr	Torr	101 325/760		
	Atmosphere	atm	101 325		
	Bar	bar	10^5		
Energy	Erg	erg	10^{-7}	Joule	J
	IT calorie	cal _{IT}	4.186 8		
	Kilogram force / meter	kgf·m	9.806 65		
	Kilowatt hour	kW·h	3.600×10^6		
	Metric horsepower per hour	PS·h	$2.647\ 79 \times 10^6$		
Power rate and power	Watt	W	1	Watt	W
	Metric horsepower	PS	735.5		
	Kilogram force / meter per second	kgf·m/s	9.806 65		

Appendix table-2: Comparison table of SI and CGS series gravity units-2

Unit system	Quantity	Power rate	Temperature	Viscosity	Dynamic viscosity	Flux	Flux density	Magnetic field strength
SI		W	K	Pa·s	m ² /s	Wb	T	A/m
CGS system		erg/s	°C	P	St	Mx	Gs	Oe
Gravitation system		kgf·m/s	°C	kgf·s/m ²	m ² /s	—	—	—

Appendix table-3: SI-customary unit conversion table-2

Quantity	Unit designation	Code	Conversion rate to SI	SI unit designation	Code
Viscosity	Poise	P	10^{-1}	Pascal second	Pa·s
	Centipoise	cP	10^{-3}		
	Kilogram force / square second per meter	kgf·s/m ²	9.806 65		
Dynamic viscosity	Stoke	St	10^{-4}	Square meter per second	m ² /s
	Centistoke	cSt	10^{-6}		
Temperature	Degree	°C	+273.15	Kelvin	K
Radioactivity	Curie	Ci	3.7×10^{10}	Becquerel	Bq
Dosage	Roentgen	R	2.58×10^{-4}	Coulombs per kilogram	C/kg
Absorption dosage	Rad	rad	10^{-2}	Gray	Gy
Dosage equivalent	Rem	rem	10^{-2}	Sievert	Sv
Dosage equivalent	Maxwell	Mx	10^{-8}	Weber	Wb
Flux density	Gamma	γ	10^{-9}	Tesla	T
	Gauss	Gs	10^{-4}		
Magnetic field strength	Oersted	Oe	$10^3/4\pi$	Amperes per meter	A/m
Magnetic field strength	Coulomb	C	1	Coulomb	C
Potential difference	Volt	V	1	Volt	V
Electric resistance	Ohm	Ω	1	Ohm	Ω
Current	Ampere	A	1	Ampere	A

Appendix table-4: Tenth power multiples of SI unit

Multiples of unit	Prefix		Multiples of unit	Prefix	
	Designation	Code		Designation	Code
10^{18}	Exa	E	10^{-1}	Deci	d
10^{15}	Peta	P	10^{-2}	Centi	c
10^{12}	Tera	T	10^{-3}	Milli	m
10^9	Giga	G	10^{-6}	Micro	μ
10^6	Mega	M	10^{-9}	Nano	n
10^3	Kilo	k	10^{-12}	Pico	p
10^2	Hecto	h	10^{-15}	Femto	f
10	Deca	da	10^{-18}	Atto	a

Appendix table-5: Dimensional tolerance for shafts

Diameter division mm		a13		c12		d6		e6		e13		f5		f6		g5		g6	
Over	Incl.	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower
—	3 ¹⁾	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3	6	- 270	- 410	- 70	- 190	- 30	- 38	- 20	- 28	- 20	- 200	-10	-15	- 10	- 18	- 4	- 9	- 4	- 12
6	10	- 280	- 500	- 80	- 230	- 40	- 49	- 25	- 34	- 25	- 245	-13	-19	- 13	- 22	- 5	-11	- 5	- 14
10	18	- 290	- 560	- 95	- 275	- 50	- 61	- 32	- 43	- 32	- 302	-16	-24	- 16	- 27	- 6	-14	- 6	- 17
18	30	- 300	- 630	-110	- 320	- 65	- 78	- 40	- 53	- 40	- 370	-20	-29	- 20	- 33	- 7	-16	- 7	- 20
30	40	- 310	- 700	-120	- 370	- 80	- 96	- 50	- 66	- 50	- 440	-25	-36	- 25	- 41	- 9	-20	- 9	- 25
40	50	- 320	- 710	-130	- 380	- 80	- 96	- 50	- 66	- 50	- 440	-25	-36	- 25	- 41	- 9	-20	- 9	- 25
50	65	- 340	- 800	-140	- 440	-100	-119	- 60	- 79	- 60	- 520	-30	-43	- 30	- 49	-10	-23	-10	- 29
65	80	- 360	- 820	-150	- 450	-100	-119	- 60	- 79	- 60	- 520	-30	-43	- 30	- 49	-10	-23	-10	- 29
80	100	- 380	- 920	-170	- 520	-120	-142	- 72	- 94	- 72	- 612	-36	-51	- 36	- 58	-12	-27	-12	- 34
100	120	- 410	- 950	-180	- 530	-120	-142	- 72	- 94	- 72	- 612	-36	-51	- 36	- 58	-12	-27	-12	- 34
120	140	- 460	-1090	-200	- 600	-145	-170	- 85	-110	- 85	- 715	-43	-61	- 43	- 68	-14	-32	-14	- 39
140	160	- 520	-1150	-210	- 610	-145	-170	- 85	-110	- 85	- 715	-43	-61	- 43	- 68	-14	-32	-14	- 39
160	180	- 580	-1210	-230	- 630	-170	-199	-100	-129	-100	- 820	-50	-70	- 50	- 79	-15	-35	-15	- 44
180	200	- 660	-1380	-240	- 700	-170	-199	-100	-129	-100	- 820	-50	-70	- 50	- 79	-15	-35	-15	- 44
200	225	- 740	-1460	-260	- 720	-190	-222	-110	-142	-110	- 920	-56	-79	- 56	- 88	-17	-40	-17	- 49
225	250	- 820	-1540	-280	- 740	-190	-222	-110	-142	-110	- 920	-56	-79	- 56	- 88	-17	-40	-17	- 49
250	280	- 920	-1730	-300	- 820	-210	-246	-125	-161	-125	-1015	-62	-87	- 62	- 98	-18	-43	-18	- 54
315	355	-1200	-2090	-360	- 930	-210	-246	-125	-161	-125	-1015	-62	-87	- 62	- 98	-18	-43	-18	- 54
355	400	-1350	-2240	-400	- 970	-230	-270	-135	-175	-135	-1105	-68	-95	- 68	-108	-20	-47	-20	- 60
400	450	-1500	-2470	-440	-1070	-230	-270	-135	-175	-135	-1105	-68	-95	- 68	-108	-20	-47	-20	- 60
450	500	-1650	-2620	-480	-1110	-260	-304	-145	-189	-145	-1245	-76	-120	- 76	-120	-22	-66	-22	- 66
500	560	—	—	—	—	-290	-340	-160	-210	-160	-1410	-80	-130	- 80	-130	-24	-74	-24	- 74
560	630	—	—	—	—	-320	-376	-170	-226	-170	-1570	-86	-142	- 86	-142	-26	-82	-26	- 82
630	710	—	—	—	—	-350	-416	-195	-261	-195	-1845	-98	-164	- 98	-164	-28	-94	-28	- 94
710	800	—	—	—	—	-390	-468	-220	-298	-220	-2170	-110	-188	-110	-188	-30	-108	-30	-108
800	900	—	—	—	—	-240	-332	-240	-2540	—	—	-120	-212	—	—	-32	-124	-32	-124
900	1000	—	—	—	—	-260	-370	-260	-3060	—	—	-130	-240	—	—	-34	-144	-34	-144
1000	1120	—	—	—	—	-290	-425	-290	-3590	—	—	-145	-280	—	—	-38	-173	-38	-173
1120	1250	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1250	1400	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1400	1600	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1600	1800	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1800	2000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2000	2240	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2240	2500	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2500	2800	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2800	3150	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

1) Basic tolerance a is not used for the basic size tolerance with respect to the size of 1 mm or below shown in drawings.

Diameter division mm		j5		js5		j6		js6		j7		k4		k5		k6		m5	
Over	Incl.	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower
—	3	+2	- 2	+ 2	- 2	+ 4	- 2	+ 3	- 3	+ 6	- 4	+ 3	0	+ 4	0	+ 6	0	+ 6	+ 2
3	6	+3	- 2	+2.5	-2.5	+ 6	- 2	+ 4	- 4	+ 8	- 4	+ 5	+1	+ 6	+1	+ 9	+1	+ 9	+ 4
6	10	+4	- 2	+ 3	- 3	+ 7	- 2	+4.5	-4.5	+10	- 5	+ 5	+1	+ 7	+1	+10	+1	+12	+ 6
10	18	+5	- 3	+ 4	- 4	+ 8	- 3	+ 5.5	-5.5	+12	- 6	+ 6	+1	+ 9	+1	+12	+1	+15	+ 7
18	30	+5	- 4	+4.5	-4.5	+ 9	- 4	+6.5	-6.5	+13	- 8	+ 8	+2	+11	+2	+15	+2	+17	+ 8
30	40	+6	- 5	+ 5.5	- 5.5	+11	- 5	+ 8	- 8	+15	-10	+ 9	+2	+13	+2	+ 18	+2	+20	+ 9
40	50	+6	- 5	+ 5.5	- 5.5	+11	- 5	+ 8	- 8	+15	-10	+ 9	+2	+13	+2	+ 18	+2	+20	+ 9
50	65	+6	- 7	+ 6.5	- 6.5	+12	- 7	+ 9.5	- 9.5	+18	-12	+10	+2	+15	+2	+ 21	+2	+24	+11
65	80	+6	- 7	+ 6.5	- 6.5	+12	- 7	+ 9.5	- 9.5	+18	-12	+10	+2	+15	+2	+ 21	+2	+24	+11
80	100	+6	- 9	+ 7.5	- 7.5	+13	- 9	+11	-11	+20	-15	+13	+3	+18	+3	+ 25	+3	+28	+13
100	120	+6	- 9	+ 7.5	- 7.5	+13	- 9	+11	-11	+20	-15	+13	+3	+18	+3	+ 25	+3	+28	+13
120	140	+7	-11	+ 9	- 9	+14	-11	+12.5	-12.5	+22	-18	+15	+3	+21	+3	+ 28	+3	+33	+15
140	160	+7	-11	+ 9	- 9	+14	-11	+12.5	-12.5	+22	-18	+15	+3	+21	+3	+ 28	+3	+33	+15
160	180	+7	-11	+ 9	- 9	+14	-11	+12.5	-12.5	+22	-18	+15	+3	+21	+3	+ 28	+3	+33	+15
180	200	+7	-13	+10	-10	+16	-13	+14.5	-14.5	+25	-21	+18	+4	+24	+4	+ 33	+4	+37	+17
200	225	+7	-13	+10	-10	+16	-13	+14.5	-14.5	+25	-21	+18	+4	+24	+4	+ 33	+4	+37	+17
225	250	+7	-13	+10	-10	+16	-13	+14.5	-14.5	+25	-21	+18	+4	+24	+4	+ 33	+4	+37	+17
250	280	+7	-16	+11.5	-11.5	+16	-16	+16	-16	+26	-26	+20	+4	+27	+4	+ 36	+4	+43	+20
280	315	+7	-16	+11.5	-11.5	+16	-16	+16	-16	+26	-26	+20	+4	+27	+4	+ 36	+4	+43	+20
315	355	+7	-18	+12.5	-12.5	+18	-18	+18	-18	+29	-28	+22	+4	+29	+4	+ 40	+4	+46	+21
355	400	+7	-18	+12.5	-12.5	+18	-18	+18	-18	+29	-28	+22	+4	+29	+4	+ 40	+4	+46	+21
400	450	+7	-20	+13.5	-13.5	+20	-20	+20	-20	+31	-32	+25	+5	+32	+5	+ 45	+5	+50	+23
450	500	+7	-20	+13.5	-13.5	+20	-20	+20	-20	+31	-32	+25	+5	+32	+5	+ 45	+5	+50	+23
500	560	—	—	+16	-16	—	—	+22	-22	—	—	—	—	—	—	+ 44	0	—	—
560	630	—	—	+16	-16	—	—	+22	-22	—	—	—	—	—	—	+ 44	0	—	—
630	710	—	—	+18	-18	—	—	+25	-25	—	—	—	—	—	—	+ 50	0	—	—
710	800	—	—	+18	-18	—	—	+25	-25	—	—	—	—	—	—	+ 50	0	—	—
800	900	—	—	+20	-20	—	—	+28	-28	—	—	—	—	—	—	+ 56	0	—	—
900	1000	—	—	+20	-20	—	—	+28	-28	—	—	—	—	—	—	+ 56	0	—	—
1000	1120	—	—	+23.5	-23.5	—	—	+33	-33	—	—	—	—	—	—	+ 66	0	—	—
1120	1250	—	—	+23.5	-23.5	—	—	+33	-33	—	—	—	—	—	—	+ 66	0	—	—
1250	1400	—	—	+27.5	-27.5	—	—	+39	-39	—	—	—	—	—	—	+ 78	0	—	—
1400	1600	—	—	+27.5	-27.5	—	—	+39	-39	—	—	—	—	—	—	+ 78	0	—	—
1600	1800	—	—	+32.5	-32.5	—	—	+46	-46	—	—	—	—	—	—	+ 92	0	—	—
1800	2000	—	—	+32.5	-32.5	—	—	+46	-46	—	—	—	—	—	—	+ 92	0	—	—
2000	2240	—	—	+39	-39	—	—	+55	-55	—	—	—	—	—	—	+110	0	—	—
2240	2500	—	—	+39	-39	—	—	+55	-55	—	—	—	—	—	—	+110	0	—	—
2500	2800	—	—	+48	-48	—	—	+67.5	-67.5	—	—	—	—	—	—	+135	0	—	—
2800	3150	—	—	+48	-48	—	—	+67.5	-67.5	—	—	—	—	—	—	+135	0	—	—

Appendix table-6: Dimensional tolerance for housing bore

Diameter division mm		E7		E10		E11		E12		F6		F7		F8		G6	
Over	Incl.	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower
—	3	+ 24	+ 14	+ 54	+ 14	+ 74	+ 14	+ 114	+ 14	+ 12	+ 6	+ 16	+ 6	+ 20	+ 6	+ 8	+ 2
3	6	+ 32	+ 20	+ 68	+ 20	+ 95	+ 20	+ 140	+ 20	+ 18	+ 10	+ 22	+ 10	+ 28	+ 10	+ 12	+ 4
6	10	+ 40	+ 25	+ 83	+ 25	+ 115	+ 25	+ 175	+ 25	+ 22	+ 13	+ 28	+ 13	+ 35	+ 13	+ 14	+ 5
10	18	+ 50	+ 32	+ 102	+ 32	+ 142	+ 32	+ 212	+ 32	+ 27	+ 16	+ 34	+ 16	+ 43	+ 16	+ 17	+ 6
18	30	+ 61	+ 40	+ 124	+ 40	+ 170	+ 40	+ 250	+ 40	+ 33	+ 20	+ 41	+ 20	+ 53	+ 20	+ 20	+ 7
30	40	+ 75	+ 50	+ 150	+ 50	+ 210	+ 50	+ 300	+ 50	+ 41	+ 25	+ 50	+ 25	+ 64	+ 25	+ 25	+ 9
40	50	+ 90	+ 60	+ 180	+ 60	+ 250	+ 60	+ 360	+ 60	+ 49	+ 30	+ 60	+ 30	+ 76	+ 30	+ 29	+ 10
50	65	+ 107	+ 72	+ 212	+ 72	+ 292	+ 72	+ 422	+ 72	+ 58	+ 36	+ 71	+ 36	+ 90	+ 36	+ 34	+ 12
65	80	+ 125	+ 85	+ 245	+ 85	+ 335	+ 85	+ 485	+ 85	+ 68	+ 43	+ 83	+ 43	+ 106	+ 43	+ 39	+ 14
80	100	+ 146	+ 100	+ 285	+ 100	+ 390	+ 100	+ 560	+ 100	+ 79	+ 50	+ 96	+ 50	+ 122	+ 50	+ 44	+ 15
100	120	+ 162	+ 110	+ 320	+ 110	+ 430	+ 110	+ 630	+ 110	+ 88	+ 56	+ 108	+ 56	+ 137	+ 56	+ 49	+ 17
120	140	+ 182	+ 125	+ 355	+ 125	+ 485	+ 125	+ 695	+ 125	+ 98	+ 62	+ 119	+ 62	+ 151	+ 62	+ 54	+ 18
140	160	+ 198	+ 135	+ 385	+ 135	+ 535	+ 135	+ 765	+ 135	+ 108	+ 68	+ 131	+ 68	+ 165	+ 68	+ 60	+ 20
160	180	+ 215	+ 145	+ 425	+ 145	+ 585	+ 145	+ 845	+ 145	+ 120	+ 76	+ 146	+ 76	+ 186	+ 76	+ 66	+ 22
180	200	+ 240	+ 160	+ 480	+ 160	+ 660	+ 160	+ 960	+ 160	+ 130	+ 80	+ 160	+ 80	+ 205	+ 80	+ 74	+ 24
200	225	+ 260	+ 170	+ 530	+ 170	+ 730	+ 170	+ 1070	+ 170	+ 142	+ 86	+ 176	+ 86	+ 226	+ 86	+ 82	+ 26
225	250	+ 300	+ 195	+ 615	+ 195	+ 855	+ 195	+ 1245	+ 195	+ 164	+ 98	+ 203	+ 98	+ 263	+ 98	+ 94	+ 28
250	280	+ 345	+ 220	+ 720	+ 220	+ 1000	+ 220	+ 1470	+ 220	+ 188	+ 110	+ 235	+ 110	+ 305	+ 110	+ 108	+ 30
280	315	+ 390	+ 240	+ 840	+ 240	+ 1160	+ 240	+ 1740	+ 240	+ 212	+ 120	+ 270	+ 120	+ 350	+ 120	+ 124	+ 32
315	355	+ 435	+ 260	+ 960	+ 260	+ 1360	+ 260	+ 2010	+ 260	+ 240	+ 130	+ 305	+ 130	+ 410	+ 130	+ 144	+ 34
355	400	+ 500	+ 290	+ 1150	+ 290	+ 1640	+ 290	+ 2390	+ 290	+ 280	+ 145	+ 355	+ 145	+ 475	+ 145	+ 173	+ 38

Diameter division mm		J6		JS6		J7		JS7		K5		K6		K7		M6	
Over	Incl.	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower
—	3	+ 2	- 4	+ 3	- 3	+ 4	- 6	+ 5	- 5	0	- 4	0	- 6	0	- 10	- 2	- 8
3	6	+ 5	- 3	+ 4	- 4	+ 6	- 6	+ 6	- 6	0	- 5	+ 2	- 6	+ 3	- 9	- 1	- 9
6	10	+ 5	- 4	+ 4.5	- 4.5	+ 8	- 7	+ 7.5	- 7.5	+ 1	- 5	+ 2	- 7	+ 5	- 10	- 3	- 12
10	18	+ 6	- 5	+ 5.5	- 5.5	+ 10	- 8	+ 9	- 9	+ 2	- 6	+ 2	- 9	+ 6	- 12	- 4	- 15
18	30	+ 8	- 5	+ 6.5	- 6.5	+ 12	- 9	+ 10.5	- 10.5	+ 1	- 8	+ 2	- 11	+ 6	- 15	- 4	- 17
30	40	+ 10	- 6	+ 8	- 8	+ 14	- 11	+ 12.5	- 12.5	+ 2	- 9	+ 3	- 13	+ 7	- 18	- 4	- 20
40	50	+ 13	- 6	+ 9.5	- 9.5	+ 18	- 12	+ 15	- 15	+ 3	- 10	+ 4	- 15	+ 9	- 21	- 5	- 24
50	65	+ 16	- 6	+ 11	- 11	+ 22	- 13	+ 17.5	- 17.5	+ 2	- 13	+ 4	- 18	+ 10	- 25	- 6	- 28
65	80	+ 18	- 7	+ 12.5	- 12.5	+ 26	- 14	+ 20	- 20	+ 3	- 15	+ 4	- 21	+ 12	- 28	- 8	- 33
80	100	+ 22	- 7	+ 14.5	- 14.5	+ 30	- 16	+ 23	- 23	+ 2	- 18	+ 5	- 24	+ 13	- 33	- 8	- 37
100	120	+ 25	- 7	+ 16	- 16	+ 36	- 16	+ 26	- 26	+ 3	- 20	+ 5	- 27	+ 16	- 36	- 9	- 41
120	140	+ 29	- 7	+ 18	- 18	+ 39	- 18	+ 28.5	- 28.5	+ 3	- 22	+ 7	- 29	+ 17	- 40	- 10	- 46
140	160	+ 33	- 7	+ 20	- 20	+ 43	- 20	+ 31.5	- 31.5	+ 2	- 25	+ 8	- 32	+ 18	- 45	- 10	- 50
160	180	—	—	+ 22	- 22	—	—	+ 35	- 35	—	—	0	- 44	0	- 70	- 26	- 70
180	200	—	—	+ 25	- 25	—	—	+ 40	- 40	—	—	0	- 50	0	- 80	- 30	- 80
200	225	—	—	+ 28	- 28	—	—	+ 45	- 45	—	—	0	- 56	0	- 90	- 34	- 90
225	250	—	—	+ 33	- 33	—	—	+ 52.5	- 52.5	—	—	0	- 66	0	- 105	- 40	- 106
250	280	—	—	+ 39	- 39	—	—	+ 62.5	- 62.5	—	—	0	- 78	0	- 125	- 48	- 126
280	315	—	—	+ 46	- 46	—	—	+ 75	- 75	—	—	0	- 92	0	- 150	- 58	- 150
315	355	—	—	+ 55	- 55	—	—	+ 87.5	- 87.5	—	—	0	- 110	0	- 175	- 68	- 178
355	400	—	—	+ 67.5	- 67.5	—	—	+ 105	- 105	—	—	0	- 135	0	- 210	- 76	- 211

Unit: μm

Diameter division mm		G7		H6		H7		H8		H9		H10		H11		H13		Diameter division mm	
Over	Incl.	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Over	Incl.
—	3	+ 12	+ 2	+ 6	0	+ 10	0	+ 14	0	+ 25	0	+ 40	0	+ 60	0	+ 140	0	—	3
3	6	+ 16	+ 4	+ 8	0	+ 12	0	+ 18	0	+ 30	0	+ 48	0	+ 75	0	+ 180	0	3	6
6	10	+ 20	+ 5	+ 9	0	+ 15	0	+ 22	0	+ 36	0	+ 58	0	+ 90	0	+ 220	0	6	10
10	18	+ 24	+ 6	+ 11	0	+ 18	0	+ 27	0	+ 43	0	+ 70	0	+ 110	0	+ 270	0	10	18
18	30	+ 28	+ 7	+ 13	0	+ 21	0	+ 33	0	+ 52	0	+ 84	0	+ 130	0	+ 330	0	18	30
30	40	+ 34	+ 9	+ 16	0	+ 25	0	+ 39	0	+ 62	0	+ 100	0	+ 160	0	+ 390	0	30	40
40	50	+ 40	+ 10	+ 19	0	+ 30	0	+ 46	0	+ 74	0	+ 120	0	+ 190	0	+ 460	0	50	65
50	65	+ 47	+ 12	+ 22	0	+ 35	0	+ 54	0	+ 87	0	+ 140	0	+ 220	0	+ 540	0	65	80
65	80	+ 54	+ 14	+ 25	0	+ 40	0	+ 63	0	+ 100	0	+ 160	0	+ 250	0	+ 630	0	80	100
80	100	+ 61	+ 15	+ 29	0	+ 46	0	+ 72	0	+ 115	0	+ 185	0	+ 290	0	+ 720	0	100	120
100	120	+ 69	+ 17	+ 32	0	+ 52	0	+ 81	0	+ 130	0	+ 210	0	+ 320	0	+ 810	0	120	140
120	140	+ 75	+ 18	+ 36	0	+ 57	0	+ 89	0	+ 140	0	+ 230	0	+ 360	0	+ 890	0	140	160
140	160	+ 83	+ 20	+ 40	0	+ 63	0	+ 97	0	+ 155	0	+ 250	0	+ 400	0	+ 970	0	160	180
160	180	+ 92	+ 22	+ 44	0	+ 70	0	+ 110	0	+ 175	0	+ 280	0	+ 440	0	+ 1100	0	180	200
180	200	+ 104	+ 24	+ 50	0	+ 80	0	+ 125	0	+ 200	0	+ 320	0	+ 500	0	+ 1250	0	200	225
200	225	+ 116	+ 26	+ 56	0	+ 90	0	+ 140	0	+ 230	0	+ 360	0	+ 560	0	+ 1400	0	225	250
225	250	+ 133	+ 28	+ 66	0	+ 105	0	+ 165	0	+ 260	0	+ 420	0	+ 660	0	+ 1650	0	250	280
250	280	+ 155	+ 30	+ 78	0	+ 125	0	+ 195	0	+ 310	0	+ 500	0	+ 780	0	+ 1950	0	280	315
280	315	+ 182	+ 32	+ 92	0	+ 150	0	+ 230	0	+ 370	0	+ 600	0	+ 920	0	+ 2300	0	315	355
315	355	+ 209	+ 34	+ 110	0	+ 175	0	+ 280	0	+ 440	0	+ 700	0	+ 1100	0	+ 2800	0	355	400
355	400	+ 248	+ 38	+ 135	0	+ 210	0	+ 330	0	+ 540	0	+ 860	0	+ 1350	0	+ 3300	0	400	450

Unit: μm

M7		N6		N7		P6		P7		R6		R7		Diameter division mm	
Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper	Lower	Over	Incl.
- 2	- 12	- 4	- 10	- 4	- 14	- 6	- 12	- 6	- 16	- 10	- 16	- 10	- 20	—	3
0	- 12	- 5	- 13	- 4	- 16	- 9	- 17	- 8	- 20	- 12	- 20	- 11	- 23	3	6
0	- 15	- 7	- 16	- 4	- 19	- 12	- 21	- 9	- 24	- 16	- 25	- 13	- 28	6	10
0	- 18	- 9	- 20	- 5	- 23	- 15	- 26	- 11	- 29	- 20	- 31	- 16	- 34	10	18
0	- 21	- 11	- 24	- 7	- 28	- 18	- 31	- 14	- 35	- 24	- 37	- 20	- 41	18	30
0	- 25	- 12	- 28	- 8	- 33	- 21	- 37	- 17	- 42	- 29	- 45	- 25	- 50	30	40
														40	50
0	- 30	- 14	- 33	- 9	- 39	- 26	- 45	- 21	- 51	- 35	- 54	- 30	- 60	50	65
										- 37	- 56	- 32	- 62	65	80
0	- 35	- 16	- 38	- 10	- 45	- 30	- 52	- 24	- 59	- 44	- 66	- 38	- 73	80	100
										- 47	- 69	- 41	- 76	100	120
										- 56	- 81	- 48	- 88	120	140
0	- 40	- 20	- 45	- 12	- 52	- 36	- 61	- 28	- 68	- 58	- 83	- 50	- 90	140	160
										- 61	- 86	- 53	- 93	160	180
										- 68	- 97	- 60	- 106	180	200
0	- 46	- 22	- 51	- 14	- 60	- 41	- 70	- 33	- 79	- 71	- 100	- 63	- 109	200	225
										- 75	- 104	- 67	- 113	225	250
0	- 52	- 25	- 57	- 14	- 66	- 47	- 79	- 36	- 88	- 85	- 117	- 74	- 126	250	280
										- 89	- 121	- 78	- 130	280	315
0	- 57	- 26	- 62	- 16	- 73	- 51	- 87	- 41	- 98	- 97	- 133	- 87	- 144	315	355
										- 103	- 139	- 93	- 150	355	400
0	- 63	- 27	- 67	- 17	- 80	- 55	- 95	- 45	- 108	- 113	- 153	- 103	- 166	400	450
										- 119	- 159	- 109	- 172	450	500
- 26	- 96	- 44	- 88	- 44	- 114	- 78	- 122	- 78	- 148	- 150	- 194	- 150	- 220	500	560
										- 155	- 199	- 155	- 225	560	630
- 30	- 110	- 50	- 100	- 50	- 130	- 88	- 138	- 88	- 168	- 175	- 225	- 175	- 225	630	710
										- 185	- 235	- 185	- 265	710	800
- 34	- 124	- 56	- 112	- 56	- 146	- 100	- 156	- 100	- 190	- 210	- 266	- 210	- 300	800	900
										- 220	- 276	- 220	- 310	900	1 000
- 40	- 145	- 66	- 132	- 66	- 171	- 120	- 186	- 120	- 225	- 250	- 316	- 250	- 355	1 000	1 120
										- 260	- 326	- 260	- 365	1 120	1 250
- 48	- 173	- 78	- 156	- 78	- 203	- 140	- 218	- 140	- 265	- 300	- 378	- 300	- 425	1 250	1 400
										- 330	- 408	- 330	- 455	1 400	1 600
- 58	- 208	- 92	- 184	- 92	- 242	- 170	- 262	- 170	- 320	- 370	- 462	- 370	- 520	1 600	1 800
										- 400	- 492	- 400	- 550	1 800	2 000
- 68	- 243	- 110	- 220	- 110	- 285	- 195	- 305	- 195	- 370	- 440	- 550	- 440	- 615	2 000	2 240
										- 460	- 570	- 460	- 635	2 240	2 500
- 76	- 286	- 135	- 270	- 135	- 345	- 240	- 375	- 240	- 450	- 550	- 685	- 550	- 760	2 500	2 800
										- 580	- 715	- 580	- 790	2 800	3 150

Appendix table-7: Basic tolerance

Unit: μm

Basic dimension mm		IT basic tolerance class									
Over	Incl.	IT1	IT2	IT3	IT4	IT5	IT6	IT7	IT8	IT9	IT10
—	3	0.8	1.2	2	3	4	6	10	14	25	40
3	6	1	1.5	2.5	4	5	8	12	18	30	48
6	10	1	1.5	2.5	4	6	9	15	22	36	58
10	18	1.2	2	3	5	8	11	18	27	43	70
18	30	1.5	2.5	4	6	9	13	21	33	52	84
30	50	1.5	2.5	4	7	11	16	25	39	62	100
50	80	2	3	5	8	13	19	30	46	74	120
80	120	2.5	4	6	10	15	22	35	54	87	140
120	180	3.5	5	8	12	18	25	40	63	100	160
180	250	4.5	7	10	14	20	29	46	72	115	185
250	315	6	8	12	16	23	32	52	81	130	210
315	400	7	9	13	18	25	36	57	89	140	230
400	500	8	10	15	20	27	40	63	97	155	250
500	630	9	11	16	22	30	44	70	110	175	280
630	800	10	13	18	25	35	50	80	125	200	320
800	1 000	11	15	21	29	40	56	90	140	230	360
1 000	1 250	13	18	24	34	46	66	105	165	260	420
1 250	1 600	15	21	29	40	54	78	125	195	310	500
1 600	2 000	18	25	35	48	65	92	150	230	370	600
2 000	2 500	22	30	41	57	77	110	175	280	440	700
2 500	3 150	26	36	50	69	93	135	210	330	540	860

Appendix table-8: Viscosity conversion table

Dynamic viscosit mm ² /s	Saybolt SUS (second)	Redwood R (second)	Engler E (degree)
2.7	35	32.2	1.18
4.3	40	36.2	1.32
5.9	45	40.6	1.46
7.4	50	44.9	1.60
8.9	55	49.1	1.75
10.4	60	53.5	1.88
11.8	65	57.9	2.02
13.1	70	62.3	2.15
14.5	75	67.6	2.31
15.8	80	71.0	2.42
17.0	85	75.1	2.55
18.2	90	79.6	2.68
19.4	95	84.2	2.81
20.6	100	88.4	2.95
23.0	110	97.1	3.21
25.0	120	105.9	3.49
27.5	130	114.8	3.77
29.8	140	123.6	4.04
32.1	150	132.4	4.32
34.3	160	141.1	4.59
36.5	170	150.0	4.88
38.8	180	158.8	5.15
41.0	190	167.5	5.44
43.2	200	176.4	5.72
47.5	220	194.0	6.28
51.9	240	212	6.85
56.5	260	229	7.38
60.5	280	247	7.95
64.9	300	265	8.51
70.3	325	287	9.24
75.8	350	309	9.95
81.2	375	331	10.7
86.8	400	353	11.4
92.0	425	375	12.1
97.4	450	397	12.8

Dynamic viscosit mm ² /s	Saybolt SUS (second)	Redwood R (second)	Engler E (degree)
103	475	419	13.5
108	500	441	14.2
119	550	485	15.6
130	600	529	17.0
141	650	573	18.5
152	700	617	19.9
163	750	661	21.3
173	800	705	22.7
184	850	749	24.2
195	900	793	25.6
206	950	837	27.0
217	1 000	882	28.4
260	1 200	1 058	34.1
302	1 400	1 234	39.8
347	1 600	1 411	45.5
390	1 800	1 587	51
433	2 000	1 763	57
542	2 500	2 204	71
650	3 000	2 646	85
758	3 500	3 087	99
867	4 000	3 526	114
974	4 500	3 967	128
1 082	5 000	4 408	142
1 150	5 500	4 849	156
1 300	6 000	5 290	170
1 400	6 500	5 730	185
1 510	7 000	6 171	199
1 630	7 500	6 612	213
1 740	8 000	7 053	227
1 850	8 500	7 494	242
1 960	9 000	7 934	256
2 070	9 500	8 375	270
2 200	10 000	8 816	284

Appendix table-9: Kgf to N conversion table

kgf		N	kgf		N	kgf		N
0.1020	1	9.8066	3.4670	34	333.43	6.8321	67	657.04
0.2039	2	19.613	3.5690	35	343.23	6.9341	68	666.85
0.3059	3	29.420	3.6710	36	353.04	7.0361	69	676.66
0.4079	4	39.227	3.7730	37	362.85	7.1380	70	686.46
0.5099	5	49.033	3.8749	38	372.65	7.2400	71	696.27
0.6118	6	58.840	3.9769	39	382.46	7.3420	72	706.08
0.7138	7	68.646	4.0789	40	392.27	7.4440	73	715.88
0.8158	8	78.453	4.1808	41	402.07	7.5459	74	725.69
0.9177	9	88.260	4.2828	42	411.88	7.6479	75	735.50
1.0197	10	98.066	4.3848	43	421.68	7.7499	76	745.30
1.1217	11	107.87	4.4868	44	431.49	7.8518	77	755.11
1.2237	12	117.68	4.5887	45	441.30	7.9538	78	764.92
1.3256	13	127.49	4.6907	46	451.10	8.0558	79	774.72
1.4276	14	137.29	4.7927	47	460.91	8.1578	80	784.53
1.5296	15	147.10	4.8946	48	470.72	8.2597	81	794.34
1.6316	16	156.91	4.9966	49	480.52	8.3617	82	804.14
1.7335	17	166.71	5.0986	50	490.33	8.4637	83	813.95
1.8355	18	176.52	5.2006	51	500.14	8.5656	84	823.76
1.9375	19	186.33	5.3025	52	509.94	8.6676	85	833.56
2.0394	20	196.13	5.4045	53	519.75	8.7696	86	843.37
2.1414	21	205.94	5.5065	54	529.56	8.8716	87	853.18
2.2434	22	215.75	5.6085	55	539.36	8.9735	88	862.98
2.3454	23	225.55	5.7104	56	549.17	9.0755	89	872.79
2.4473	24	235.36	5.8124	57	558.98	9.1775	90	882.60
2.5493	25	245.17	5.9144	58	568.78	9.2794	91	892.40
2.6513	26	254.97	6.0163	59	578.59	9.3814	92	902.21
2.7532	27	264.78	6.1183	60	588.40	9.4834	93	912.02
2.8552	28	274.59	6.2203	61	598.20	9.5854	94	921.82
2.9572	29	284.39	6.3223	62	608.01	9.6873	95	931.63
3.0592	30	294.20	6.4242	63	617.82	9.7893	96	941.44
3.1611	31	304.01	6.5262	64	627.62	9.8913	97	951.24
3.2631	32	313.81	6.6282	65	637.43	9.9932	98	961.05
3.3651	33	323.62	6.7302	66	647.24	10.0952	99	970.86

[How to read the table] If for example you want to convert 10 kgf to N, find "10" in the middle column of the first set of columns. Look in the N column directly to the right of "10," and you will see that 10 kgf equals 98.066 N. Oppositely, to convert 10 N to kgf, look in the kgf column to the left of "10" and you will see that 10 N equals 1.0197 kgf.

1 kgf = 9.80665 N
1 N = 0.101972 kgf

Appendix table-10: Inch / millimeter conversion table

Inch		0"	1"	2"	3"	4"	5"	6"	7"	8"	9"
Fraction	Decimal										
1/64	0.015625	0.397	25.400	50.800	76.200	101.600	127.000	152.400	177.800	203.200	228.600
1/32	0.031250	0.794	25.797	51.197	76.597	101.997	127.397	152.797	178.197	203.597	228.997
3/64	0.046875	1.191	26.194	51.594	76.994	102.394	127.794	153.194	178.594	203.994	229.394
1/16	0.062500	1.588	26.988	52.388	77.788	103.188	128.588	153.988	179.388	204.788	230.188
5/64	0.078125	1.984	27.384	52.784	78.184	103.584	128.984	154.384	179.784	205.184	230.584
3/32	0.093750	2.381	27.781	53.181	78.581	103.981	129.381	154.781	180.181	205.581	230.981
7/64	0.109375	2.778	28.178	53.578	78.978	104.378	129.778	155.178	180.578	205.978	231.378
1/8	0.125000	3.175	28.575	53.975	79.375	104.775	130.175	155.575	180.975	206.375	231.775
9/64	0.140625	3.572	28.972	54.372	79.772	105.172	130.572	155.972	181.372	206.772	232.172
5/32	0.156250	3.969	29.369	54.769	80.169	105.569	130.969	156.369	181.769	207.169	232.569
11/64	0.171875	4.366	29.766	55.166	80.566	105.966	131.366	156.766	182.166	207.566	232.966
3/16	0.187500	4.762	30.162	55.562	80.962	106.362	131.762	157.162	182.562	207.962	233.362
13/64	0.203125	5.159	30.559	55.959	81.359	106.759	132.159	157.559	182.959	208.359	233.759
7/32	0.218750	5.556	30.956	56.356	81.756	107.156	132.556	157.956	183.356	208.756	234.156
15/64	0.234375	5.953	31.353	56.753	82.153	107.553	132.953	158.353	183.753	209.153	234.553
1/4	0.250000	6.350	31.750	57.150	82.550	107.950	133.350	158.750	184.150	209.550	234.950
17/64	0.265625	6.747	32.147	57.547	82.947	108.347	133.747	159.147	184.547	209.947	235.347
9/32	0.281250	7.144	32.544	57.944	83.344	108.744	134.144	159.544	184.944	210.344	235.744
19/64	0.296875	7.541	32.941	58.341	83.741	109.141	134.541	159.941	185.341	210.741	236.141
5/16	0.312500	7.938	33.338	58.738	84.138	109.538	134.938	160.338	185.738	211.138	236.538
21/64	0.328125	8.334	33.734	59.134	84.534	109.934	135.334	160.734	186.134	211.534	236.934
11/32	0.343750	8.731	34.131	59.531	84.931	110.331	135.731	161.131	186.531	211.931	237.331
23/64	0.359375	9.128	34.528	59.928	85.328	110.728	136.128	161.528	186.928	212.328	237.728
3/8	0.375000	9.525	34.925	60.325	85.725	111.125	136.525	161.925	187.325	212.725	238.125
25/64	0.390625	9.922	35.322	60.722	86.122	111.522	136.922	162.322	187.722	213.122	238.522
13/32	0.406250	10.319	35.719	61.119	86.519	111.919	137.319	162.719	188.119	213.519	238.919
27/64	0.421875	10.716	36.116	61.516	86.916	112.316	137.716	163.116	188.516	213.916	239.316
7/16	0.437500	11.112	36.512	61.912	87.312	112.712	138.112	163.512	188.912	214.312	239.712
29/64	0.453125	11.509	36.909	62.309	87.709	113.109	138.509	163.909	189.309	214.709	240.109
15/32	0.468750	11.906	37.306	62.706	88.106	113.506	138.906	164.306	189.706	215.106	240.506
31/64	0.484375	12.303	37.703	63.103	88.503	113.903	139.303	164.703	190.103	215.503	240.903
1/2	0.500000	12.700	38.100	63.500	88.900	114.300	139.700	165.100	190.500	215.900	241.300
33/64	0.515625	13.097	38.497	63.897	89.297	114.697	140.097	165.497	190.897	216.297	241.697
17/32	0.531250	13.494	38.894	64.294	89.694	115.094	140.494	165.894	191.294	216.694	242.094
35/64	0.546875	13.891	39.291	64.691	90.091	115.491	140.891	166.291	191.691	217.091	242.491
9/16	0.562500	14.288	39.688	65.088	90.488	115.888	141.288	166.688	192.088	217.488	242.888
37/64	0.578125	14.684	40.084	65.484	90.884	116.284	141.684	167.084	192.484	217.884	243.284
19/32	0.593750	15.081	40.481	65.881	91.281	116.681	142.081	167.481	192.881	218.281	243.681
39/64	0.609375	15.478	40.878	66.278	91.678	117.078	142.478	167.878	193.278	218.678	244.078
5/8	0.625000	15.875	41.275	66.675	92.075	117.475	142.875	168.275	193.675	219.075	244.475
41/64	0.640625	16.272	41.672	67.072	92.472	117.872	143.272	168.672	194.072	219.472	244.872
21/32	0.656250	16.669	42.069	67.469	92.869	118.269	143.669	169.069	194.469	219.869	245.269
43/64	0.671875	17.066	42.466	67.866	93.266	118.666	144.066	169.466	194.866	220.266	245.666
11/16	0.687500	17.462	42.862	68.262	93.662	119.062	144.462	169.862	195.262	220.662	246.062
45/64	0.703125	17.859	43.259	68.659	94.059	119.459	144.859	170.259	195.659	221.056	246.459
23/32	0.718750	18.256	43.656	69.056	94.456	119.856	145.256	170.656	196.056	221.456	246.856
47/64	0.734375	18.653	44.053	69.453	94.853	120.253	145.653	171.053	196.453	221.853	247.253
3/4	0.750000	19.050	44.450	69.850	95.250	120.650	146.050	171.450	196.850	222.250	247.650
49/64	0.765625	19.447	44.847	70.247	95.647	121.047	146.447	171.847	197.247	222.647	248.047
25/32	0.781250	19.844	45.244	70.644	96.044	121.444	146.844	172.244	197.644	223.044	248.444
51/64	0.796875	20.241	45.641	71.041	96.441	121.841	147.241	172.641	198.041	223.441	248.841
13/16	0.812500	20.638	46.038	71.438	96.838	122.238	147.638	173.038	198.438	223.838	249.238
53/64	0.828125	21.034	46.434	71.834	97.234	122.634	148.034	173.434	198.834	224.234	249.634
27/32	0.843750	21.431	46.831	72.231	97.631	123.031	148.431	173.831	199.231	224.631	250.031
55/64	0.859375	21.828	47.228	72.628	98.028	123.428	148.828	174.228	199.628	225.028	250.428
7/8	0.875000	22.225	47.625	73.025	98.425	123.825	149.225	174.625	200.025	225.425	250.825
57/64	0.890625	22.622	48.022	73.422	98.822	124.222	149.622	175.022	200.422	225.822	251.222
29/32	0.906250	23.019	48.419	73.819	99.219	124.619	150.019	175.419	200.819	226.219	251.619
59/64	0.921875	23.416	48.816	74.216	99.616	125.016	150.416	175.816	201.216	226.616	252.016
15/16	0.937500	23.812	49.212	74.612	100.012	125.412	150.812	176.212	201.612	227.012	252.412
61/64	0.953125	24.209	49.609	75.009	100.409	125.809	151.209	176.609	202.009	227.409	252.809
31/32	0.968750	24.606	50.006	75.406	100.806	126.206	151.606	177.006	202.406	227.806	253.206
63/64	0.984375	25.003	50.403	75.803	101.203	126.603	152.003	177.403	202.803	228.203	253.603

Appendix table-11: Hardness conversion table (reference)

Rockwell hardness C scale 1 471.0 N	Vickers hardness	Brinell hardness		Rockwell hardness		Shore hardness
		Standard steel balls	Tungsten carbide steel balls	A scale 588.4 N	B scale 980.7 N	
68	940			85.6		97
67	900			85.0		95
66	865			84.5		92
65	832		739	83.9		91
64	800		722	83.4		88
63	772		705	82.8		87
62	746		688	82.3		85
61	720		670	81.8		83
60	697		654	81.2		81
59	674		634	80.7		80
58	653		615	80.1		78
57	633		595	79.6		76
56	613		577	79.0		75
55	595	—	560	78.5		74
54	577	—	543	78.0		72
53	560	—	525	77.4		71
52	544	500	512	76.8		69
51	528	487	496	76.3		68
50	513	475	481	75.9		67
49	498	464	469	75.2		66
48	484	451	455	74.7		64
47	471	442	443	74.1		63
46	458	432	432	73.6		62
45	446	421	421	73.1		60
44	434	409	409	72.5		58
43	423	400	400	72.0		57
42	412	390	390	71.5		56
41	402	381	381	70.9		55
40	392	371	371	70.4	—	54
39	382	362	362	69.9	—	52
38	372	353	353	69.4	—	51
37	363	344	344	68.9	—	50
36	354	336	336	68.4	(109.0)	49
35	345	327	327	67.9	(108.5)	48
34	336	319	319	67.4	(108.0)	47
33	327	311	311	66.8	(107.5)	46
32	318	301	301	66.3	(107.0)	44
31	310	294	294	65.8	(106.0)	43
30	302	286	286	65.3	(105.5)	42
29	294	279	279	64.7	(104.5)	41
28	286	271	271	64.3	(104.0)	41
27	279	264	264	63.8	(103.0)	40
26	272	258	258	63.3	(102.5)	38
25	266	253	253	62.8	(101.5)	38
24	260	247	247	62.4	(101.0)	37
23	254	243	243	62.0	100.0	36
22	248	237	237	61.5	99.0	35
21	243	231	231	61.0	98.5	35
20	238	226	226	60.5	97.8	34
(18)	230	219	219	—	96.7	33
(16)	222	212	212	—	95.5	32
(14)	213	203	203	—	93.9	31
(12)	204	194	194	—	92.3	29
(10)	196	187	187	—	90.7	28
(8)	188	179	179	—	89.5	27
(6)	180	171	171	—	87.1	26
(4)	173	165	165	—	85.5	25
(2)	166	158	158	—	83.5	24
(0)	160	152	152	—	81.7	24

Remarks: Quoted from hardness conversion table (SAE J 417)

Appendix table-12: Greek alphabet list

Roman type (upright)	Italic type (slanted)		Name
	Upper case	Lower case	
A	<i>A</i>	<i>α</i>	Alpha
B	<i>B</i>	<i>β</i>	Beta
Γ	<i>Γ</i>	<i>γ</i>	Gamma
Δ	<i>Δ</i>	<i>δ</i>	Delta
E	<i>E</i>	<i>ε</i>	Epsilon
Z	<i>Z</i>	<i>ζ</i>	Zeta
H	<i>H</i>	<i>η</i>	Eta
Θ	<i>Θ</i>	<i>θ</i>	Theta
I	<i>I</i>	<i>ι</i>	Iota
K	<i>K</i>	<i>κ</i>	Kappa
Λ	<i>Λ</i>	<i>λ</i>	Lambda
M	<i>M</i>	<i>μ</i>	Mu
N	<i>N</i>	<i>ν</i>	Nu
Ξ	<i>Ξ</i>	<i>ξ</i>	Xi
O	<i>O</i>	<i>ο</i>	Omicron
Π	<i>Π</i>	<i>π</i>	Pi
P	<i>P</i>	<i>ρ</i>	Rho
Σ	<i>Σ</i>	<i>σ</i>	Sigma
T	<i>T</i>	<i>τ</i>	Tau
Υ	<i>Υ</i>	<i>υ</i>	Upsilon
Φ	<i>Φ</i>	<i>φ</i>	Phi
X	<i>X</i>	<i>χ</i>	Khi
Ψ	<i>Ψ</i>	<i>ψ</i>	Psi
Ω	<i>Ω</i>	<i>ω</i>	Omega

NTN corporation

 ◀ Sales Network



NTN corporation

 ◀ Sales Network

NOTE : The appearance and specifications may be changed without prior notice if required to improve performance. Although care has been taken to assure the accuracy of the data compiled in this catalog, **NTN** does not assume any liability to any company or person for errors or omissions.